




SIGNAL PEDESTAL FOUNDATION

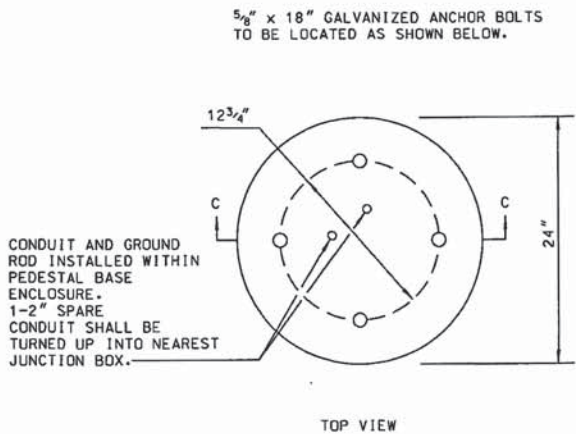

- NOTES:
1. TRAFFIC SIGNAL ANCHOR BOLTS SHALL PROTRUDE 2 3/4" MIN. - 3" MAX. ABOVE FINISHED PEDESTAL FOUNDATION. CONDUIT AND GROUND RODS SHALL PROTRUDE 2" ABOVE FINISHED FOUNDATION.
 2. BACKFILL OVER CONDUIT RUNS SHALL BE OF SOIL OR SAND AND SHALL NOT CONTAIN ROCKS OR CONCRETE.
 3. ALL 90° ELLS TO BE STANDARD RADIUS.

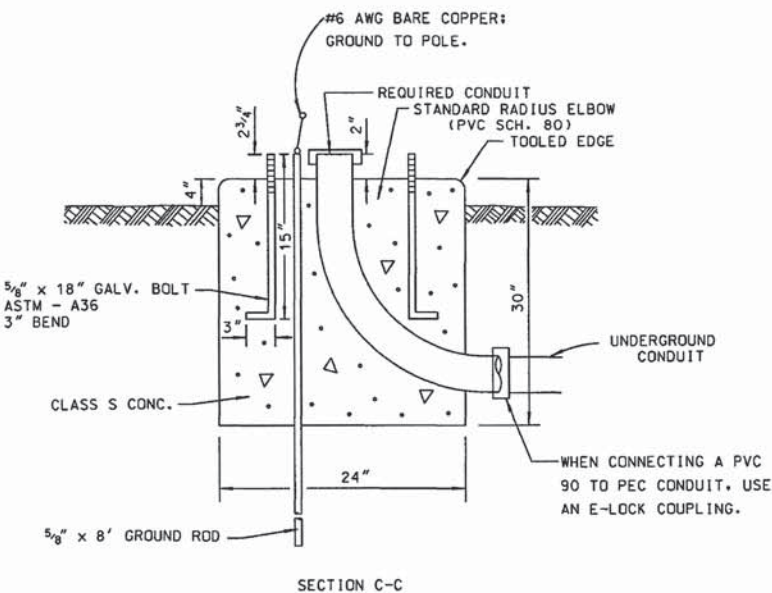

CONDUIT ENTRANCE DETAIL TO EXISTING FOUNDATION

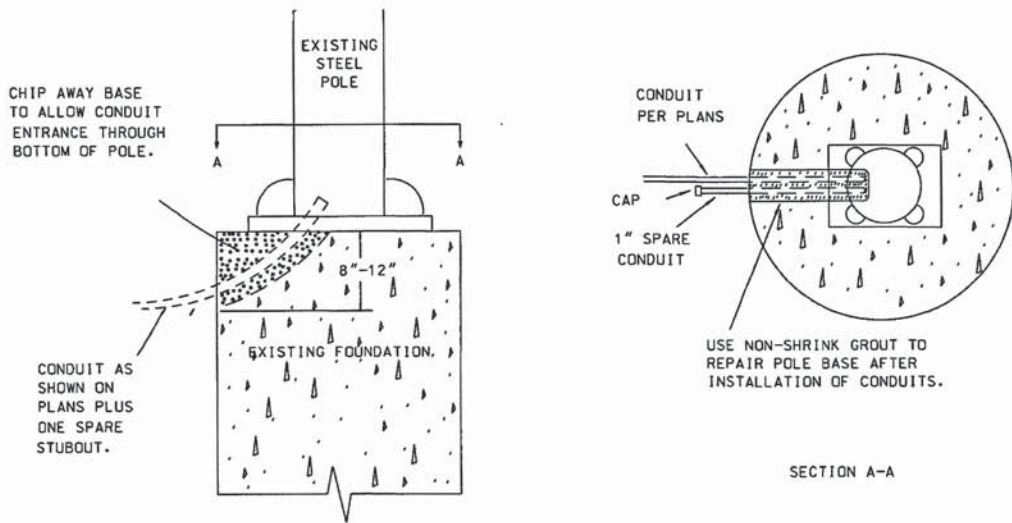

50' SINGLE, 45'X40'DUAL, AND UNDER
MAST ARM, STEEL STRAIN POLE STANDARD

CONDUIT (NO. AND SIZE AS REQ'D. ON PLANS).
PROVIDE ADDITIONAL 1-3" SPARE CONDUIT ON
ALL FOUNDATIONS. TURN UP CONDUIT INTO
NEAREST JUNCTION BOX.

