

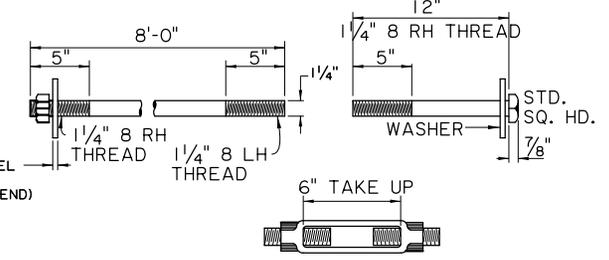
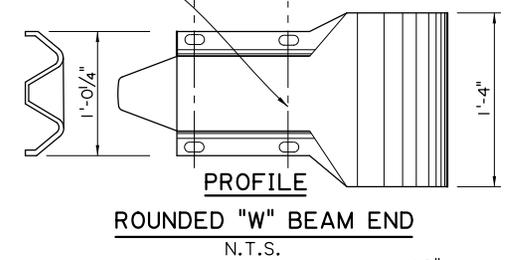
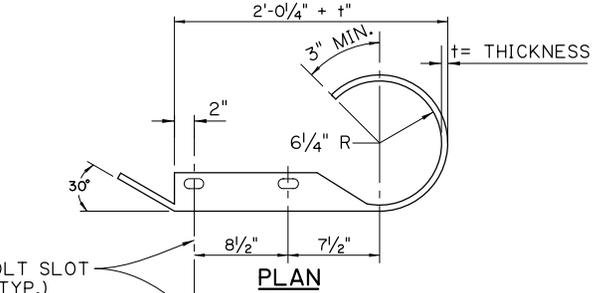


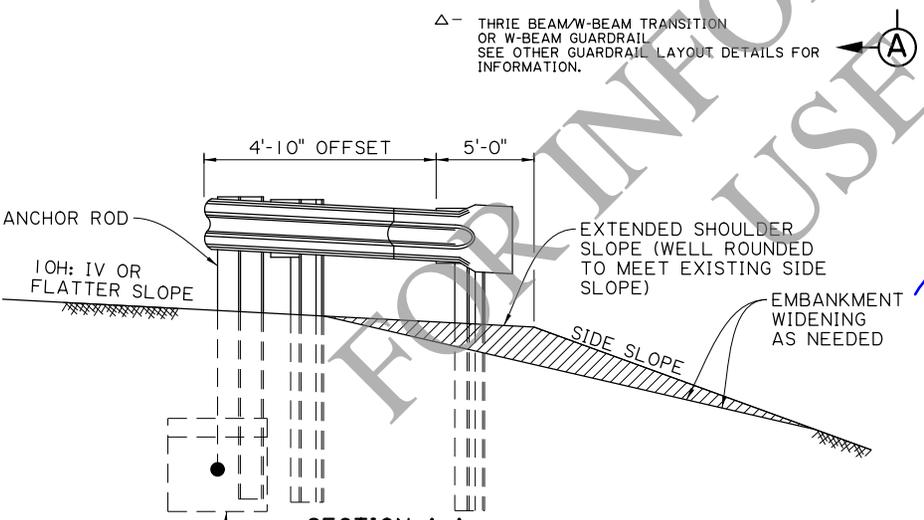


GENERAL NOTES:

1. FOR OTHER DETAILS NOT SHOWN (STEEL POST, TIMBER BLOCKOUT, GUARDRAIL, ETC.), SEE THE OTHER PLAN SHEET AND THE GUARDRAIL STANDARD PLANS OF THE LOUISIANA DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT.
2. ROUNDED W-BEAM END SECTION SHALL CONFORM WITH AASHTO M-180 CLASS "A", ANCHOR ROD CONNECTOR PLATE AND ANCHOR ROD PLATE WASHER SHALL CONFORM TO ASTM A-36 STEEL.
3. GUARDRAIL FLARED END TREATMENT MEETS TEST LEVEL 2 (TL-2) NCHRP350 ACCEPTANCE CRITERIA. REFERENCE FHWA ACCEPTANCE LETTER CC-62.
4. A DESIGN EXCEPTION IS REQUIRED TO USE THIS TL-2 GUARD RAIL END TREATMENT.
5. PAY ITEM: 704-10-00105

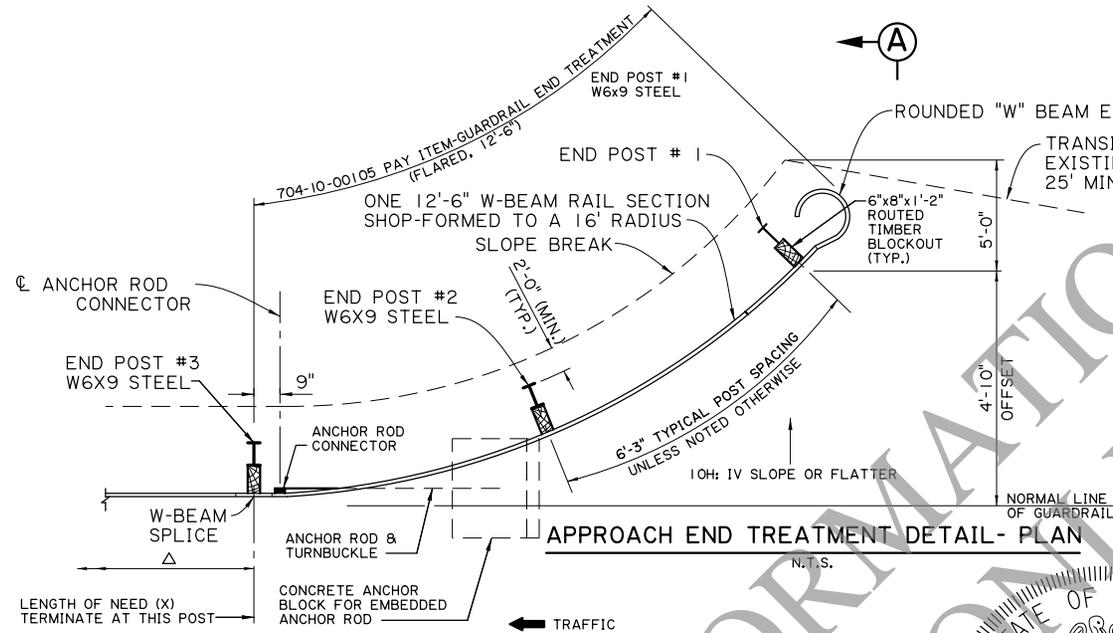

TURNBUCKLE
MIN. TENSILE STRENGTH 60,000 LBS.
LOAD APPLIED THROUGH ASSEMBLY
(ANCHOR ROD AND TURNBUCKLE)


ANCHOR ROD
N.T.S.

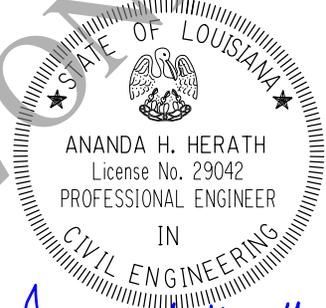

Ananda Herath
01-14-2026



GUARD RAIL END TREATMENT
(FLARED, 12'-6")
SPECIAL DETAILS
BD.2.6.4.1.18



NO.	DATE	REVISION OR CHANGE ORDER DESCRIPTION	BY

DESIGNED	A. HERATH
CHECKED	R. OWENS
DETAILED	D. HYMEL
CHECKED	A. HERATH
REVIEWED	K. BRAUNER
SERIES #	1 OF 2

PARISH	
CONTROL SECTION	
STATE PROJECT	

SHEET NUMBER