
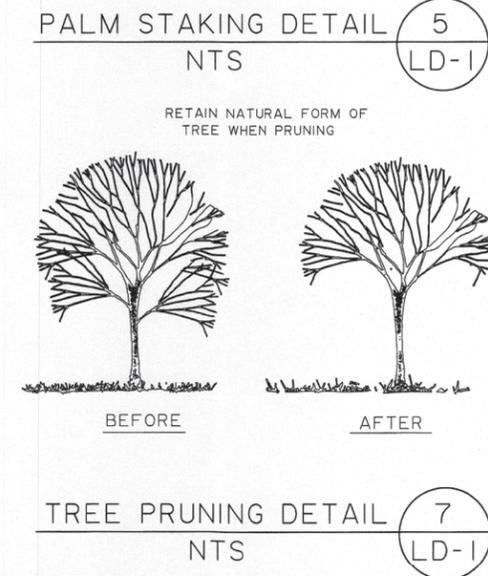


NOTES:

1. WHEN PLANTING INDIVIDUAL TREES OUTSIDE OF AREAS MAINTAINED AS PREPARED BEDS, THE MATERIALS USED IN THE INSTALLATION ARE INCLUDED IN THE COST OF EACH TREE AS DESCRIBED IN SECTION 719 OF THE "STANDARD SPECIFICATIONS FOR ROADS AND BRIDGES", UNDER "SETTING INDIVIDUAL PLANTS NOT IN BEDS".

2. ROWS OR GROUPS OF TREES IN CLOSE PROXIMITY AND PLANTED OUTSIDE OF AREAS MAINTAINED AS PREPARED BEDS, MAY HAVE A COMMON MULCHED AREA ENCOMPASSING THEM IN ORDER TO SIMPLIFY MOWING AROUND THEM. THE METHOD OF PREPARING THE MULCHED AREA IS DESCRIBED IN SECTION 719 OF THE "STANDARD SPECIFICATIONS FOR ROADS AND BRIDGES", UNDER "SETTING INDIVIDUAL PLANTS (BED PREPARATION MULCH BEDS)".

3. PROPOSED VEGETATION OVER 30 INCHES IN HEIGHT AT MATURITY SHALL NOT BE LOCATED WITHIN THE SIGHT TRIANGLE (CRITICAL ZONE), AS DESCRIBED IN "FIGURE 1 CRITICAL SIGHT DISTANCE FOR TRAFFIC ENTERING THE HIGHWAY" WHICH MAY BE FOUND IN THE LOUISIANA ADMINISTRATIVE CODE TITLE 70-TRANSPORTATION AND DEVELOPMENT.

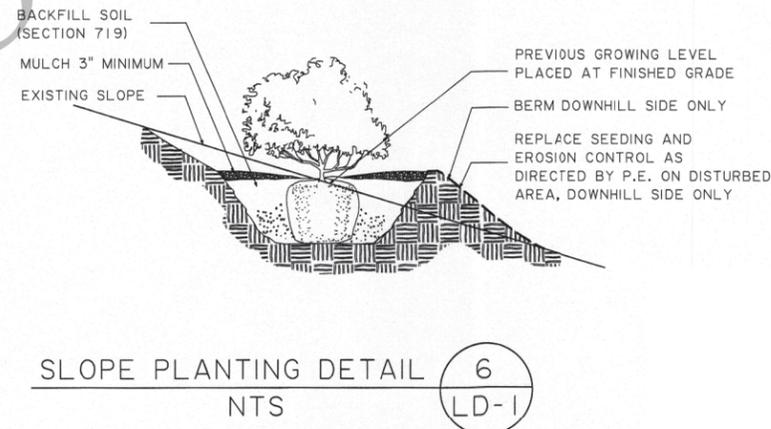

SHEET NUMBER	XXX
DESIGN	
CHECK	
DETAIL	HJP
CHECK	RJD
REVIEW	
SERIES	1 OF 1
DATE	12/10/2025
APPROVED BY CHIEF ENGINEER	
REVISION OR CHANGE ORDER DESCRIPTION	
NO.	
DATE	
BY	
TREE AND SHRUB PLANTING DETAILS LD-01	
STANDARD PLAN	