
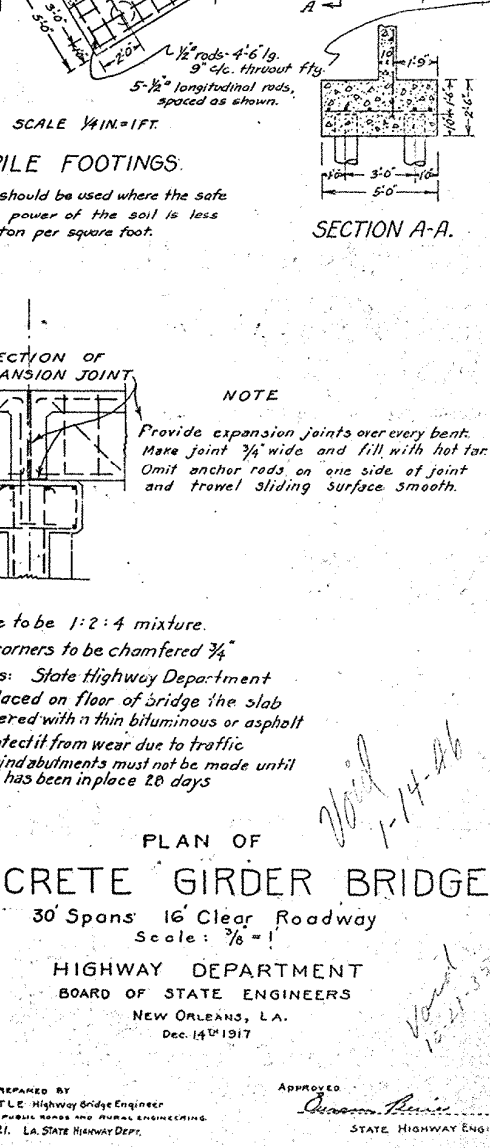
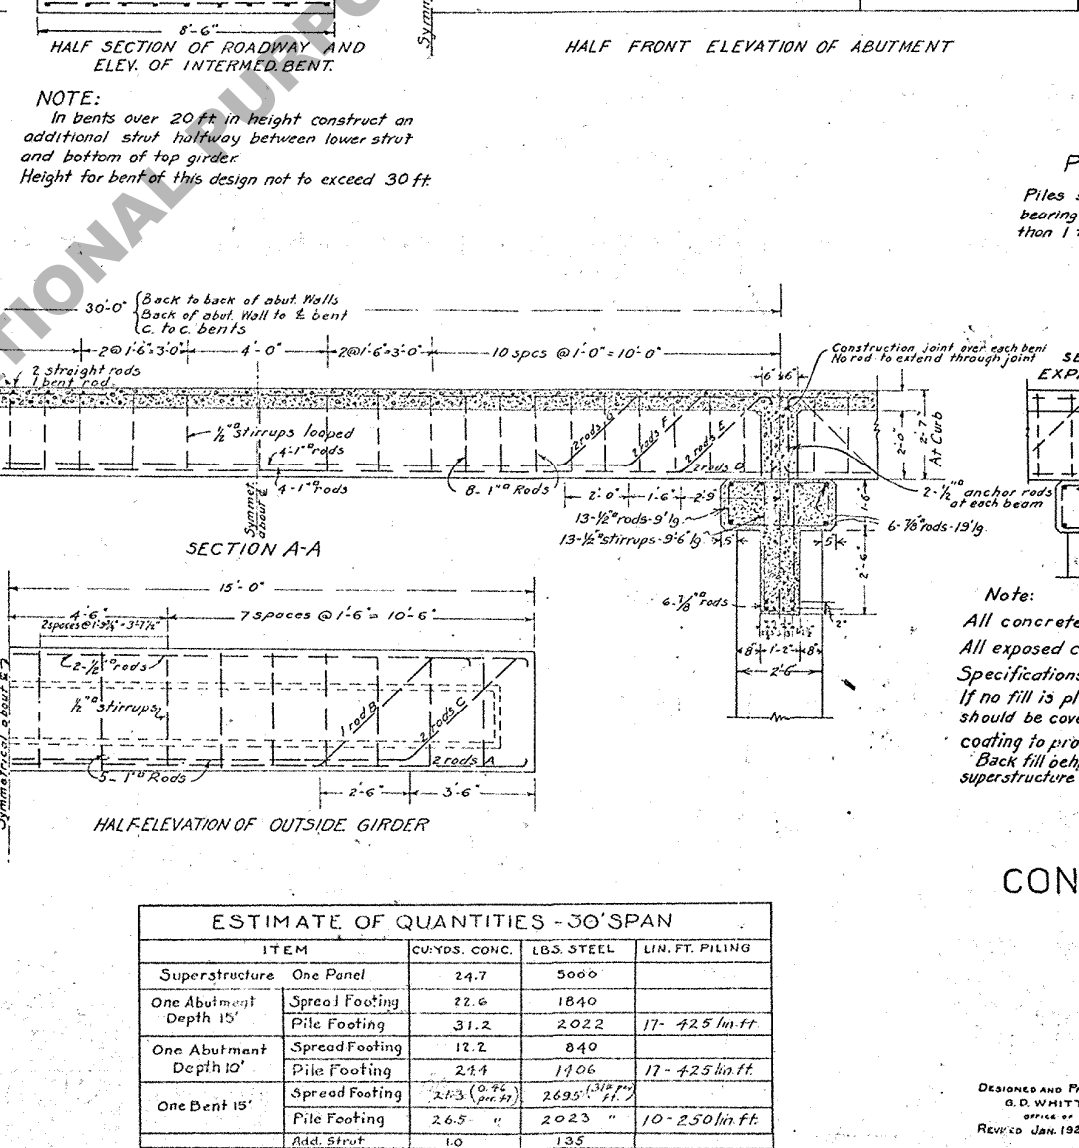
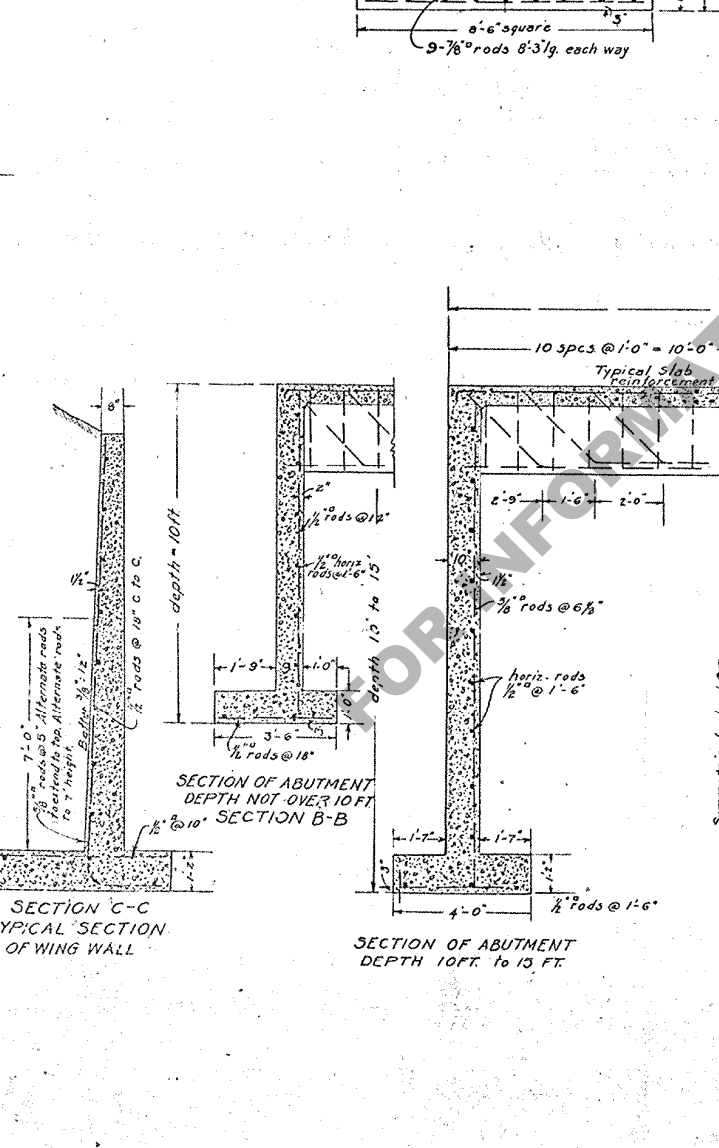
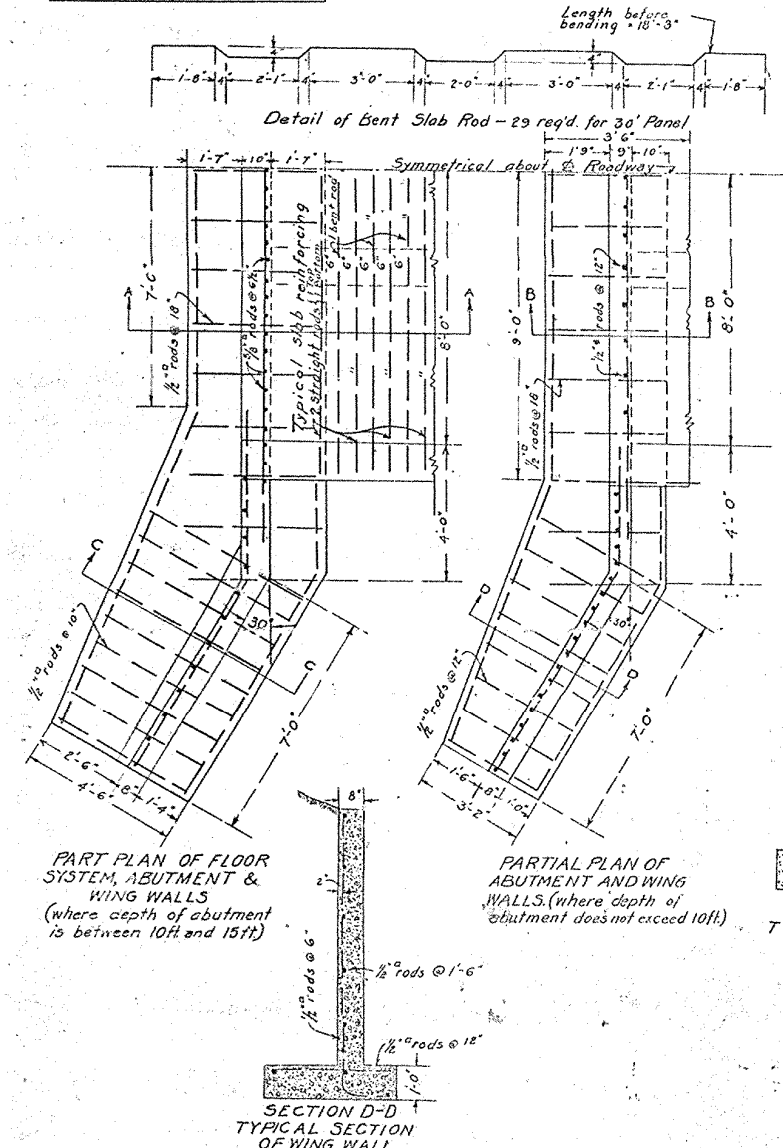


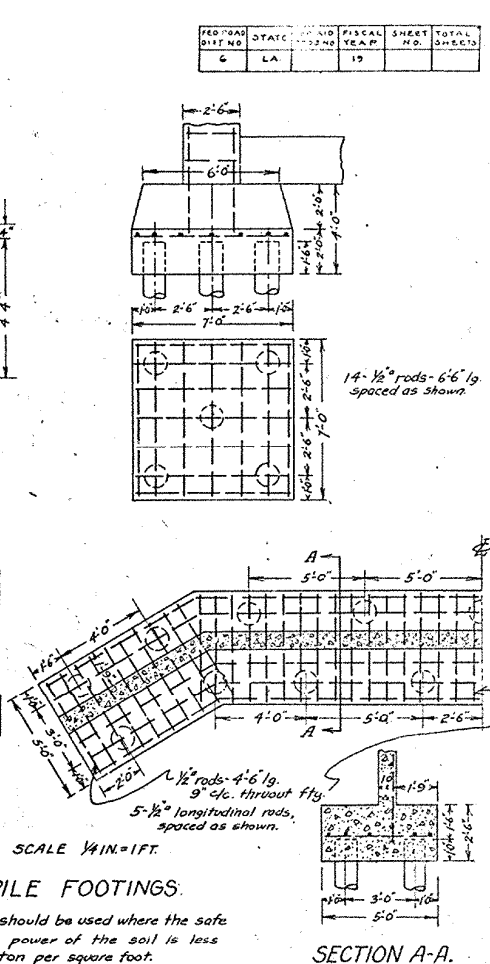

ESTIMATE OF QUANTITIES - 30' SPAN				
ITEM		CU.YDS. CONC.	LBS. STEEL	LIN. FT. PILING
Superstructure	One Panel	24.7	5000	
One Abutment Depth 15'	Spread Footing	22.6	1840	
	Pile Footing	31.2	2022	17 - 425 lin.ft.
One Abutment Depth 10'	Spread Footing	12.2	840	
	Pile Footing	24.4	1406	17 - 425 lin.ft.
One Bent 15'	Spread Footing	24.3 (0.46 per ft.)	2695 (318 per ft.)	
	Pile Footing	26.5 "	2023 "	10 - 250 lin.ft.
	Add. Strut	1.0	135	