

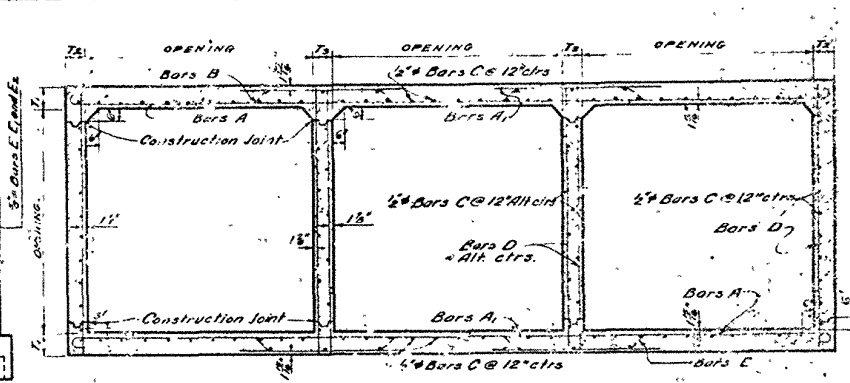


## WINGS AND CURBS REINFORCEMENT

## OPENINGS

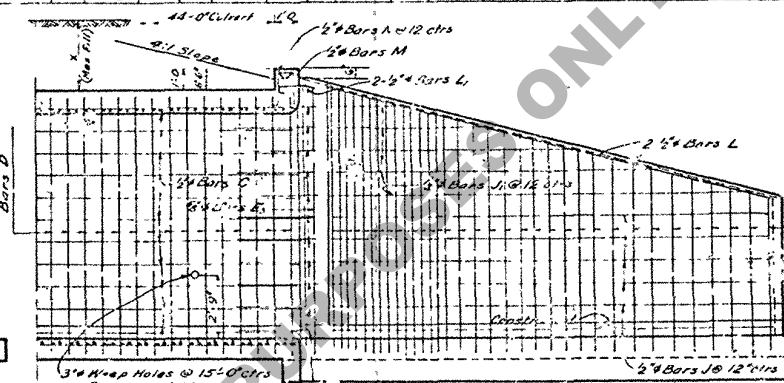

SECTION B-B

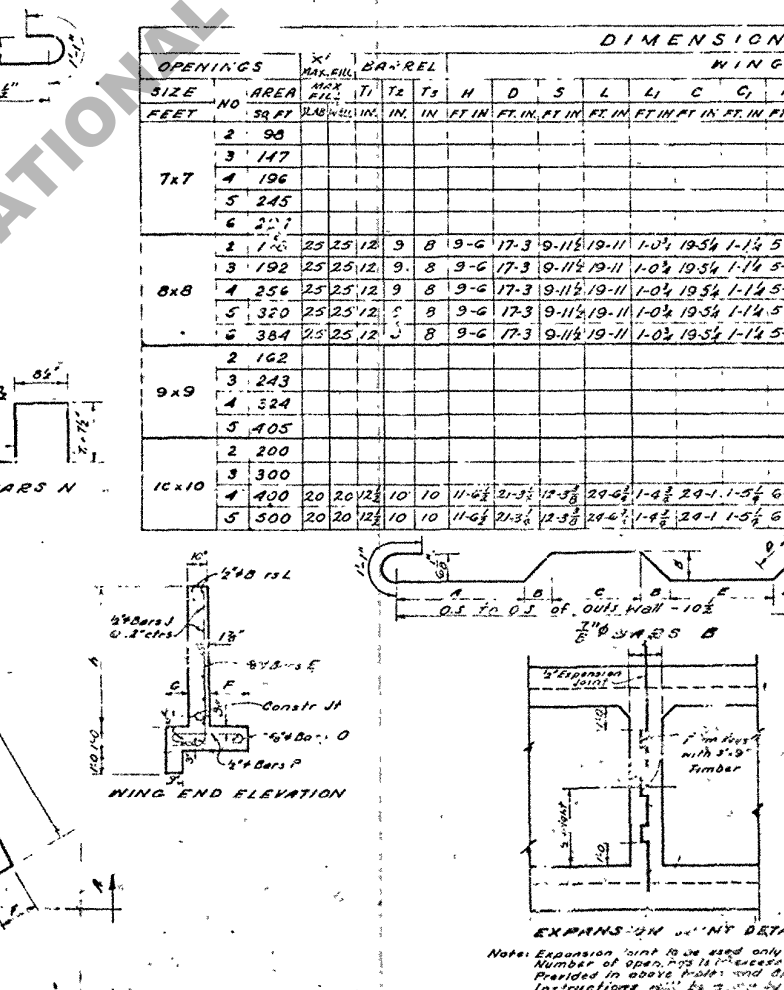

— OPINION

Al. exposed corners to be chamfered  $\frac{3}{4}$ " units  
other walls to be Class A.  
Concrete to be Class A.  
Since about 2 cu yd of Large Size Gravel or Less  
Rock behind and around each weep hole.  
Reinforcement shall be in accordance with A.S.T.M  
A15 or Rail Steel (A.S.T.M. A 675) except for A305  
Diameter of bars to be 1" or 1 1/2" (except steel bars for Chris-  
tianity of 1/2" or 3/4" diameter). See also Plan CM 49  
for details of bars, joints, & concrete. See also Plan CM 49

STATE OF LOUISIANA  
DEPARTMENT OF HIGHWAYS  
RECEIVED  
BY AND NASCA  
CHAS. C. J.  
IN CHARGE OF T.A. BUIE  
HEADQUARTERS  
PORTS

2010  
REPLACES  
C-70