
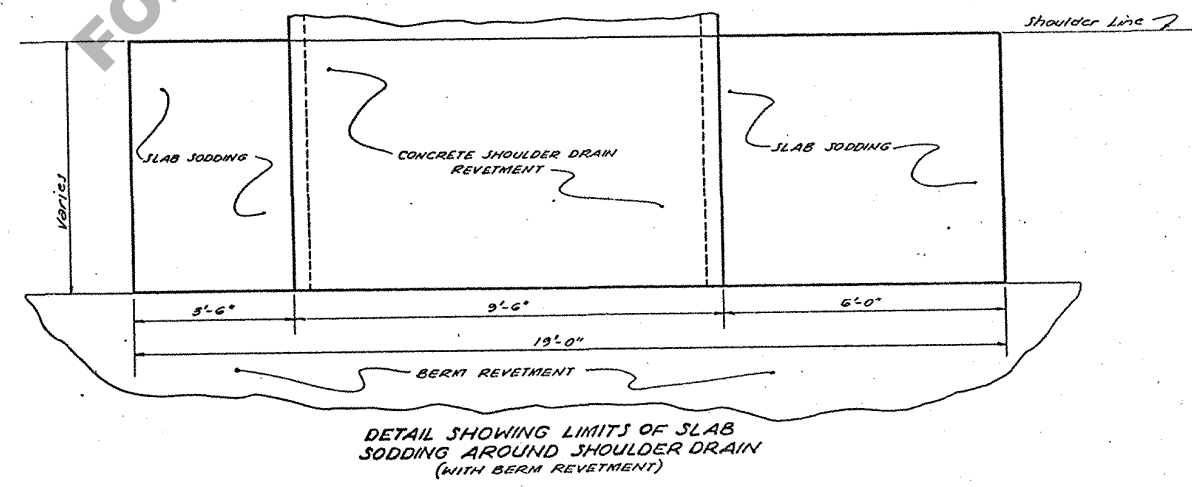
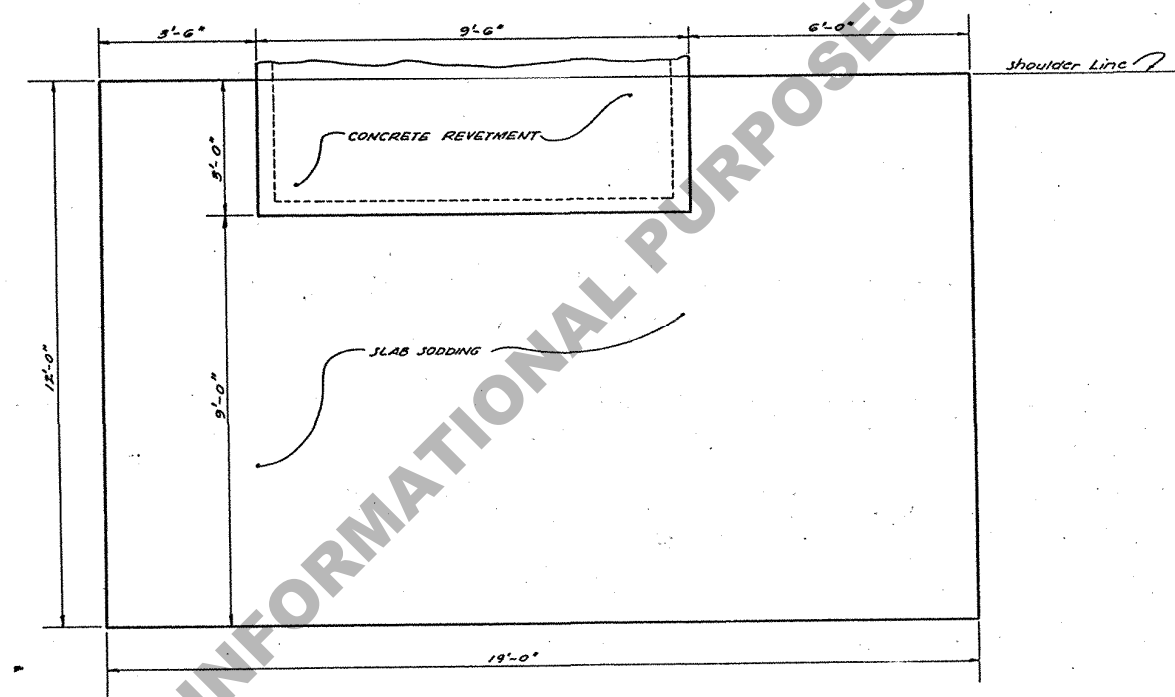
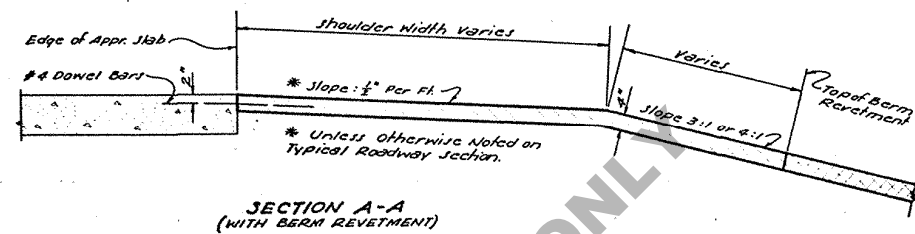
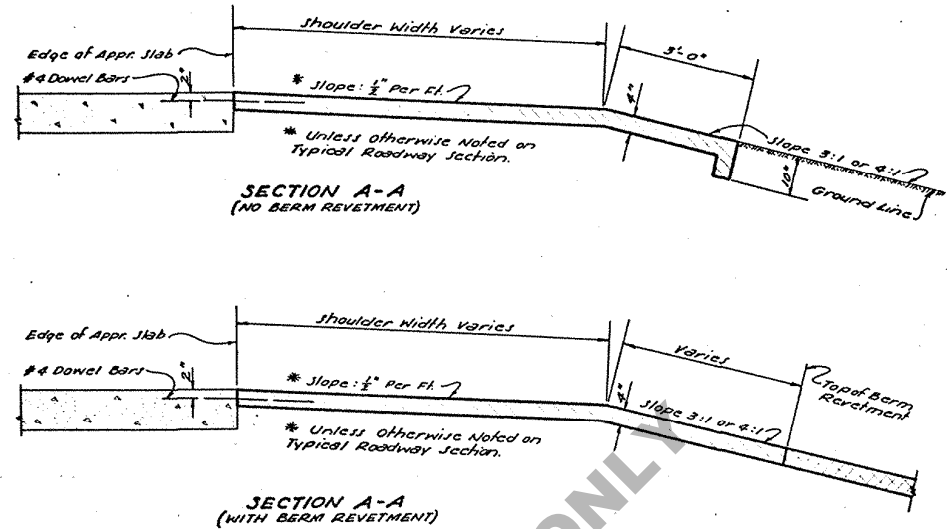


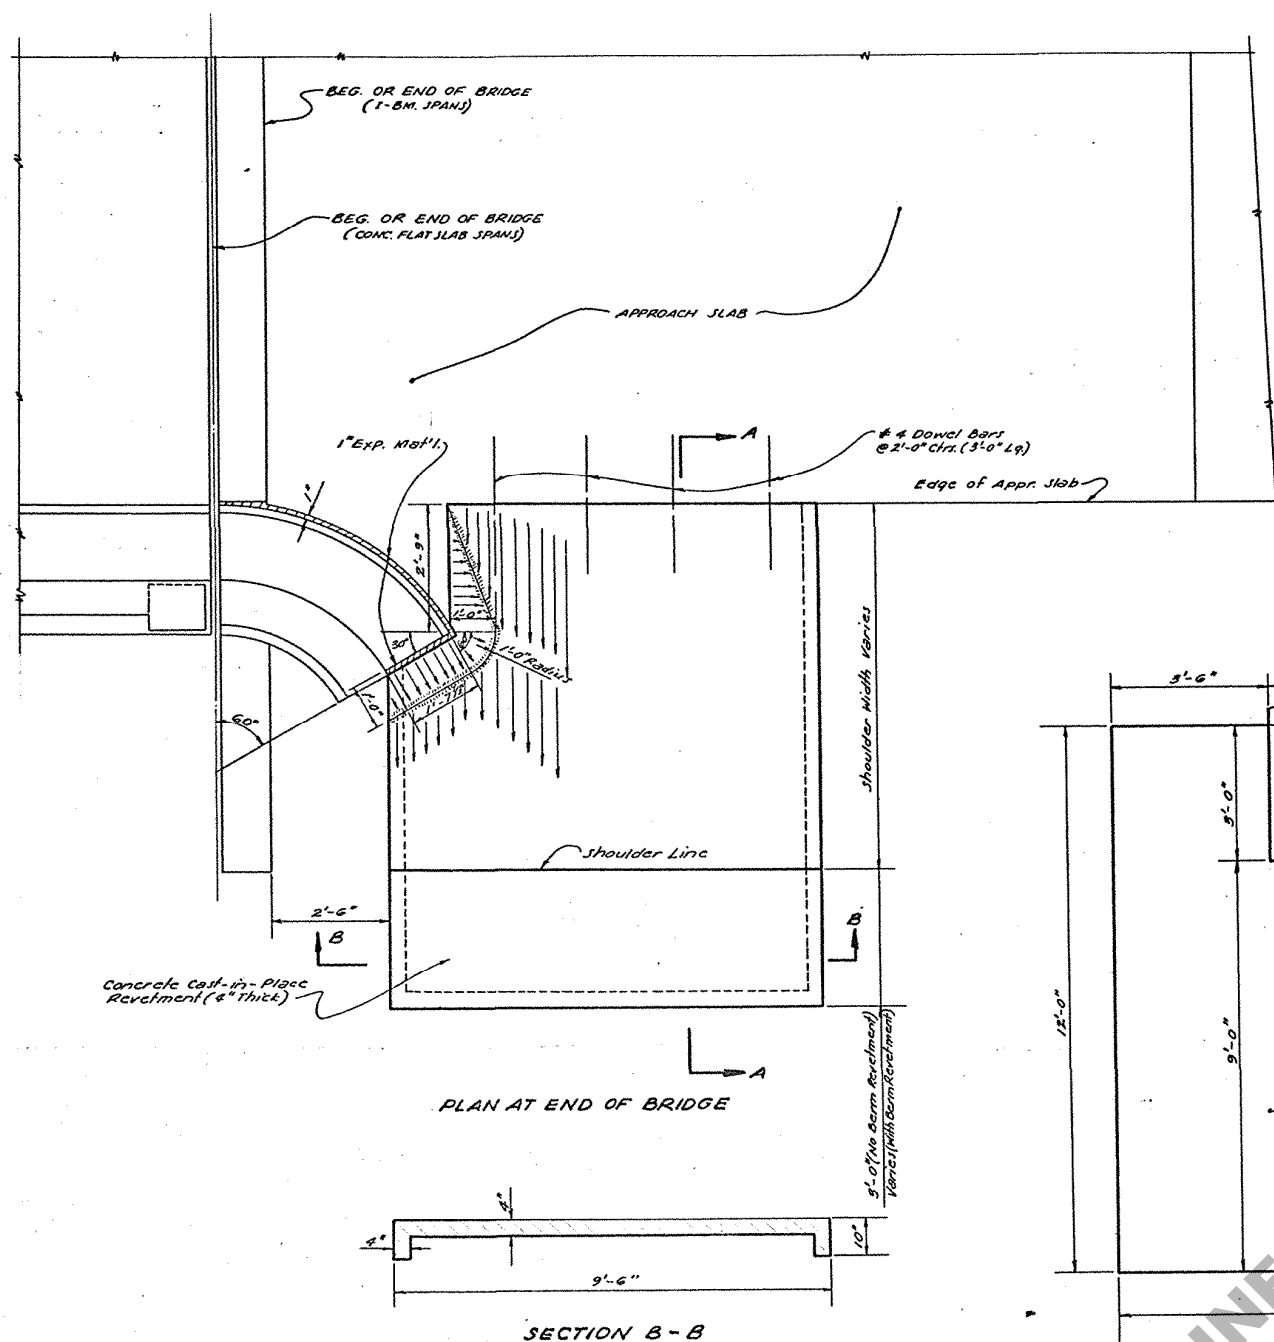

ESTIMATED QUANTITIES FOR CONCRETE CAST-IN-PLACE REVETMENT	
NO BERM REVETMENT	WITH BERM REVETMENT
4' SHOULDER Deformed Reinforcing Steel = 8 Pounds Concrete Cast-in-Place Revetment (4" Thick) = 7.97 Sq. Yds. Slab Jodding = 2.2 Sq. Yds.	4' SHOULDER Deformed Reinforcing Steel = 8 Pounds Concrete Cast-in-Place Revetment (4" Thick) from Edge of Appr. Slab to Shoulder Line = 9.98 Sq. Yds. Conc. Cast-in-Place Revetment (4" Thick) for Side Slope Per Ft. of Slope = 1.1667 Sq. Yds. Slab Jodding Per Ft. of Slope = 1.0556 Sq. Yds.
5' SHOULDER Deformed Reinforcing Steel = 8 Pounds Concrete Cast-in-Place Revetment (4" Thick) = 9.13 Sq. Yds. Slab Jodding = 2.2 Sq. Yds.	5' SHOULDER Deformed Reinforcing Steel = 8 Pounds Concrete Cast-in-Place Revetment (4" Thick) from Edge of Appr. Slab to Shoulder Line = 5.14 Sq. Yds. Concrete Cast-in-Place Revetment (4" Thick) for Side Slope Per Ft. of Slope = 1.1667 Sq. Yds. Slab Jodding Per Ft. of Slope = 1.0556 Sq. Yds.
6' SHOULDER Deformed Reinforcing Steel = 8 Pounds Concrete Cast-in-Place Revetment (4" Thick) = 10.80 Sq. Yds. Slab Jodding = 2.2 Sq. Yds.	6' SHOULDER Deformed Reinforcing Steel = 8 Pounds Concrete Cast-in-Place Revetment (4" Thick) from Edge of Appr. Slab to Shoulder Line = 6.31 Sq. Yds. Conc. Cast-in-Place Revetment (4" Thick) for Side Slope Per Ft. of Slope = 1.1667 Sq. Yds. Slab Jodding Per Ft. of Slope = 1.0556 Sq. Yds.
7' SHOULDER Deformed Reinforcing Steel = 8 Pounds Concrete Cast-in-Place Revetment (4" Thick) = 11.67 Sq. Yds. Slab Jodding = 2.2 Sq. Yds.	7' SHOULDER Deformed Reinforcing Steel = 8 Pounds Concrete Cast-in-Place Revetment (4" Thick) from Edge of Appr. Slab to Shoulder Line = 7.48 Sq. Yds. Conc. Cast-in-Place Revetment (4" Thick) for Side Slope Per Ft. of Slope = 1.1667 Sq. Yds. Slab Jodding Per Ft. of Slope = 1.0556 Sq. Yds.
8' SHOULDER Deformed Reinforcing Steel = 8 Pounds Concrete Cast-in-Place Revetment (4" Thick) = 12.64 Sq. Yds. Slab Jodding = 2.2 Sq. Yds.	8' SHOULDER Deformed Reinforcing Steel = 8 Pounds Concrete Cast-in-Place Revetment (4" Thick) from Edge of Appr. Slab to Shoulder Line = 8.65 Sq. Yds. Conc. Cast-in-Place Revetment (4" Thick) for Side Slope Per Ft. of Slope = 1.1667 Sq. Yds. Slab Jodding Per Ft. of Slope = 1.0556 Sq. Yds.
9' SHOULDER Deformed Reinforcing Steel = 8 Pounds Concrete Cast-in-Place Revetment (4" Thick) = 13.80 Sq. Yds. Slab Jodding = 2.2 Sq. Yds.	9' SHOULDER Deformed Reinforcing Steel = 8 Pounds Concrete Cast-in-Place Revetment (4" Thick) from Edge of Appr. Slab to Shoulder Line = 9.81 Sq. Yds. Conc. Cast-in-Place Revetment (4" Thick) for Side Slope Per Ft. of Slope = 1.1667 Sq. Yds. Slab Jodding Per Ft. of Slope = 1.0556 Sq. Yds.
10' SHOULDER Deformed Reinforcing Steel = 8 Pounds Concrete Cast-in-Place Revetment (4" Thick) = 14.97 Sq. Yds. Slab Jodding = 2.2 Sq. Yds.	10' SHOULDER Deformed Reinforcing Steel = 8 Pounds Concrete Cast-in-Place Revetment (4" Thick) from Edge of Appr. Slab to Shoulder Line = 10.98 Sq. Yds. Conc. Cast-in-Place Revetment (4" Thick) for Side Slope Per Ft. of Slope = 1.1667 Sq. Yds. Slab Jodding Per Ft. of Slope = 1.0556 Sq. Yds.

GENERAL NOTES:
CONSTRUCTION SPECIFICATIONS: Latest Approved Louisiana Department of Highways Specifications.

STANDARD PLAN CONCRETE SHOULDER DRAINS AT BRIDGE ENDS		
DATED AUG. 22, 1958		
STATE OF LOUISIANA DEPARTMENT OF HIGHWAYS		
DESIGNED	DETAILED	TRACED
CHECKED	CHECKED	CHECKED
BRIDGE DESIGN SECTION		