


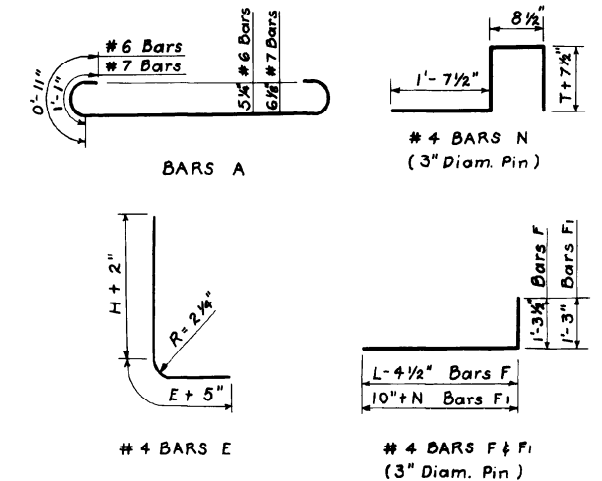

GENERAL NOTES:
Construction Specifications: Latest Approved La. Dept. of
Highways Standard Specifications.
Design Specifications: A.A.&H.O. 1969 as Amended to 1971.
Live Load: HS 20-44 or Military Loading Whichever is Greater.
All Concrete to be Class "A".
All Exposed Corners to have 3/4" Chamfer Unless Otherwise Noted.
Reinforcement Shall be Billet-Steel A.S.T.M. A615 or Rail-Steel A.S.T.M.
A616 or Axle-Steel A.S.T.M. A617.
Dimensions Relating to Reinforcing Steel are to Bar Centers.
A 1'-6" Square of Plastic Filter Cloth (See Qualified Products List)
Shall be placed in contact with Concrete behind each Weep Hole,
in addition to approx. 2 Cu. Ft. of Concrete Sand.
For Detail of Joints, See Std. Plan C.M. - 49.

STANDARD PLAN
REINFORCED CONCRETE BOX CULVERT
STRAIGHT WINGS 90° CROSSING
2:1 SPILL SLOPE
8' TO 10' SPANS 4' TO 6' HEIGHTS
DATED NOV 30 1971

STATE OF LOUISIANA
DEPARTMENT OF HIGHWAYS

APPROVED BY: Dennis D. White 1-11-78
CHIEF ENGINEER DATE

STATE OF LOUISIANA		
DEPARTMENT OF HIGHWAYS		
DESIGNED	DETAILED J. J. RIBAS	TRACED E. B. ALLEN
CHECKED	CHECKED J. D. BACCI	CHECKED J. D. BACCI