




General Notes:
 Const. Specs. Latest approved La. Hwy. Dept. Std. Specs.
 Design Specs. La. Hwy. Commission 1940
 Reinforcing Steel dimensions are to bar centers. Provide $\frac{3}{8}$ " bars each way at all walls @ 6' cts. both ways and $\frac{3}{8}$ " bars @ 12' cts. in floor and roof slabs. Perpendicular to main reinforcement. All concrete to be Class A-A and all exposed surfaces to have a rubbed finish. Interior of Operators Room to be plastered over Metal Channels and Lath. Floor of Operators Room to be covered with $\frac{1}{2}$ " Red Floor Tile and base. All windows and doors to be metal. Windows to be 6'0" x 8'0" and all openings to be screened with 18ga. copper screening unless otherwise noted. Doors to be fitted with lumber locks. Metal windows, doors and trim to be painted to match plaster and concrete. All materials required to complete Operators House to be included in lump sum bid for house except precast concrete piles which are to be paid for at the price bid for that item. When electric current is available two drop lights and two service outlets shall be provided in each room. All Hardware shall be Solid Brass. All doors and windows to be weather-stripped.

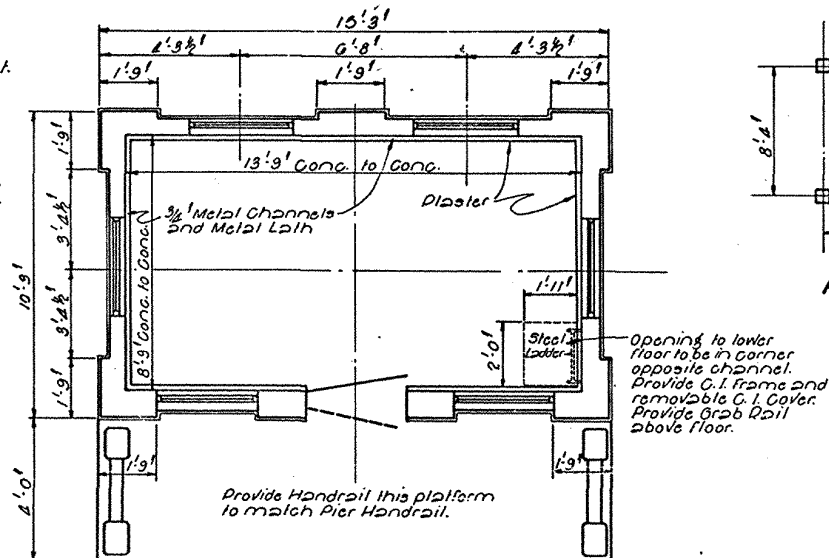


UPPER FLOOR PLAN
 Lower floor similar except for opening in floor and as shown in other views.
 No handrail req'd on Lower Platform.
SECTION B-B

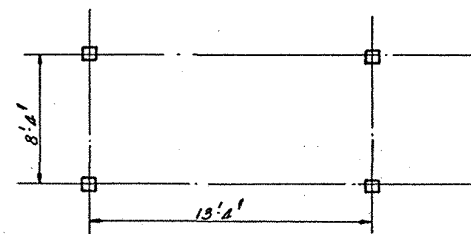


PILE SPACING PLAN

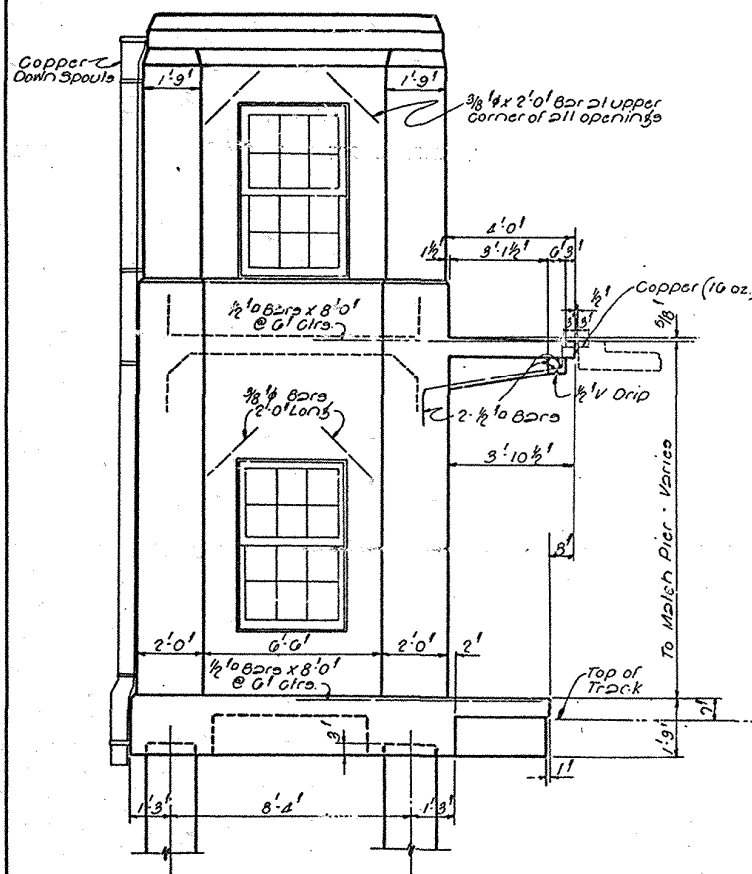


SIDE ELEVATION

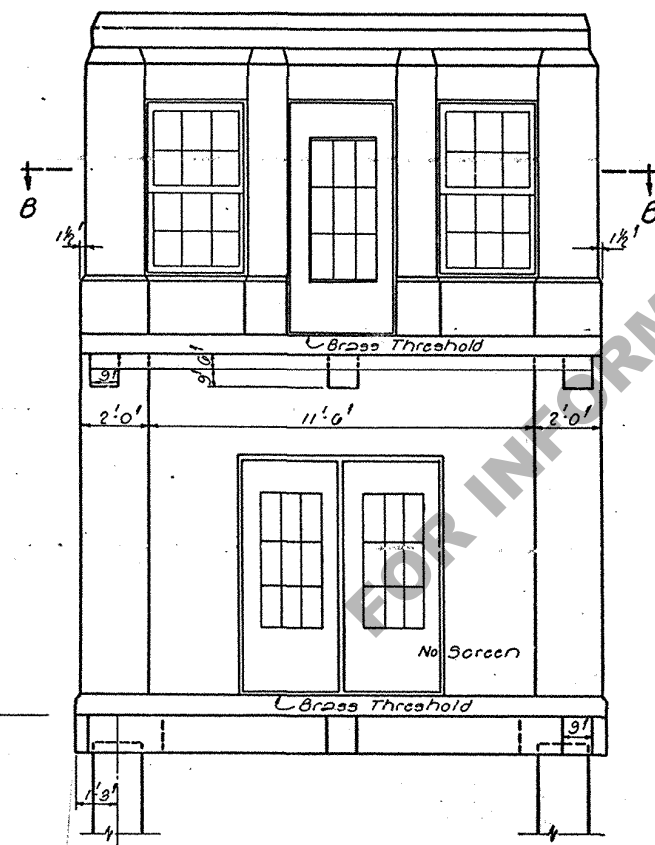

FRONT ELEVATION

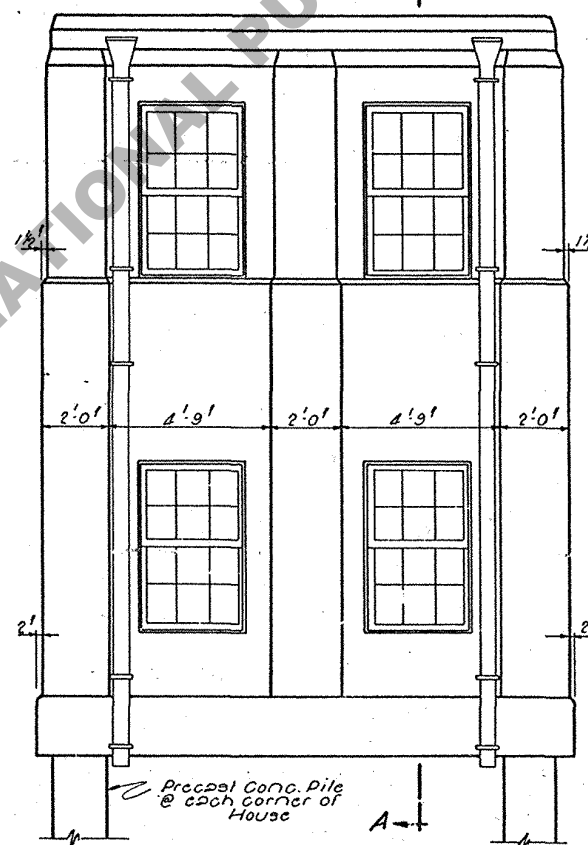

REAR ELEVATION

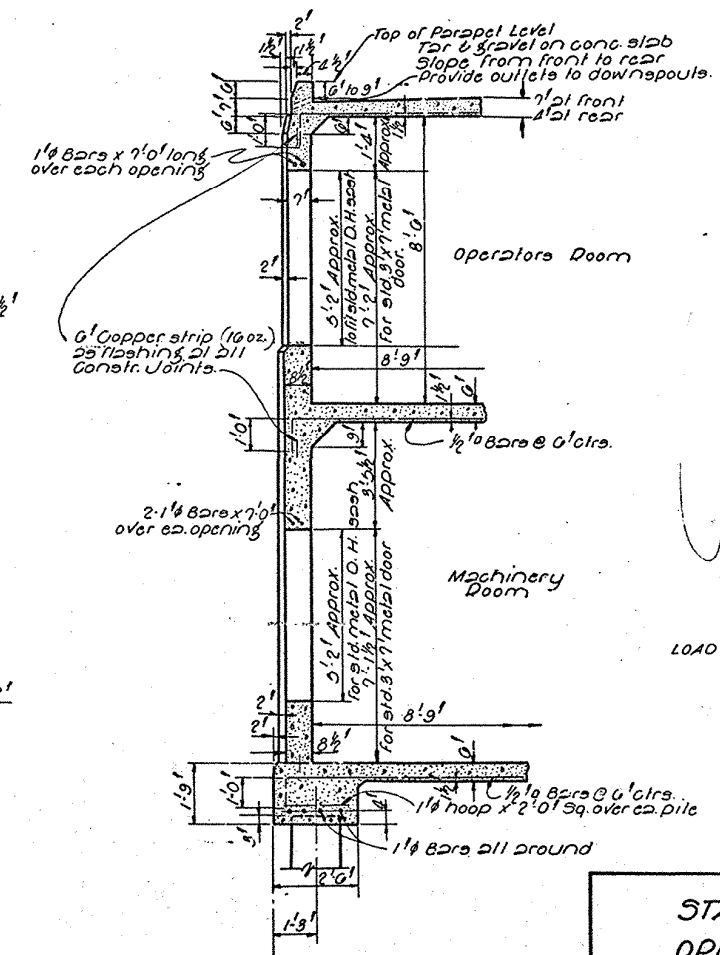

SECTION A-A

STANDARD PLAN			
OPERATORS HOUSE			
OPERATORS AND MACHINERY HOUSE			
LOUISIANA HIGHWAY COMMISSION			
BATON ROUGE, LA. April 1936			
1-46 Gen. Notes	DESIGNED <i>W. J. H. H. H.</i>	DETAILED <i>W. J. H. H.</i>	TRACED <i>W. J. H. H.</i>
2-22-30 Replaced	CHECKED <i>W. J. H. H.</i>	CHECKED <i>W. J. H. H.</i>	CHECKED <i>W. J. H. H.</i>
DATE	DESCRIPTION	BY	REVISIONS
1/4 DRAWING OF <i>Charles A. Myers</i> BRIDGE DESIGNING ENGINEER			

C.M. 108