


GENERAL NOTES:


1. THIS STRUCTURE MEETS ALL DOTD HYDRAULIC PERFORMANCE CRITERIA WHEN USED IN ACCORDANCE WITH THE DOTD HYDRAULICS MANUAL AND ALL DOTD HYDRAULIC DESIGN POLICIES.
2. CONSTRUCTION SPECIFICATIONS: LATEST APPROVED LA DOTD STANDARD SPECIFICATIONS.
3. ALL EXPOSED CORNERS SHALL HAVE $\frac{3}{4}$ " CHAMFER UNLESS OTHERWISE NOTED.
4. DIMENSIONS RELATING TO REINFORCING STEEL FABRICATION ARE OUT-TO-OUT OF BARS AND DIMENSIONS RELATING TO REINFORCING STEEL SPACING ARE CENTER-TO-CENTER OF BARS.
5. REINFORCING STEEL SHALL HAVE 2" COVER UNLESS OTHERWISE SPECIFIED.
6. IF PRECAST CATCH BASIN IS USED, PLEASE REFER TO STANDARD PLAN PC-01 FOR DETAILS AND SPECIFICATIONS.
7. PAVED GUTTER DRAINS SHALL BE POURED MONOLITHICALLY.

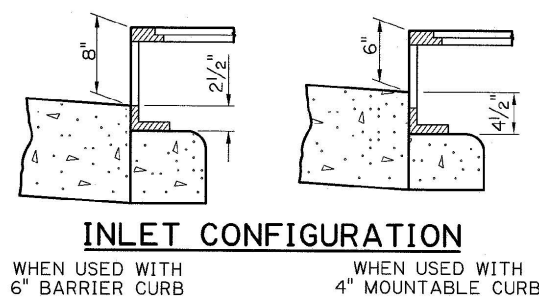


INLET CONFIGURATION

WHEN USED WITH 6" BARRIER CURB

WHEN USED WITH 4" MOUNTABLE CURB

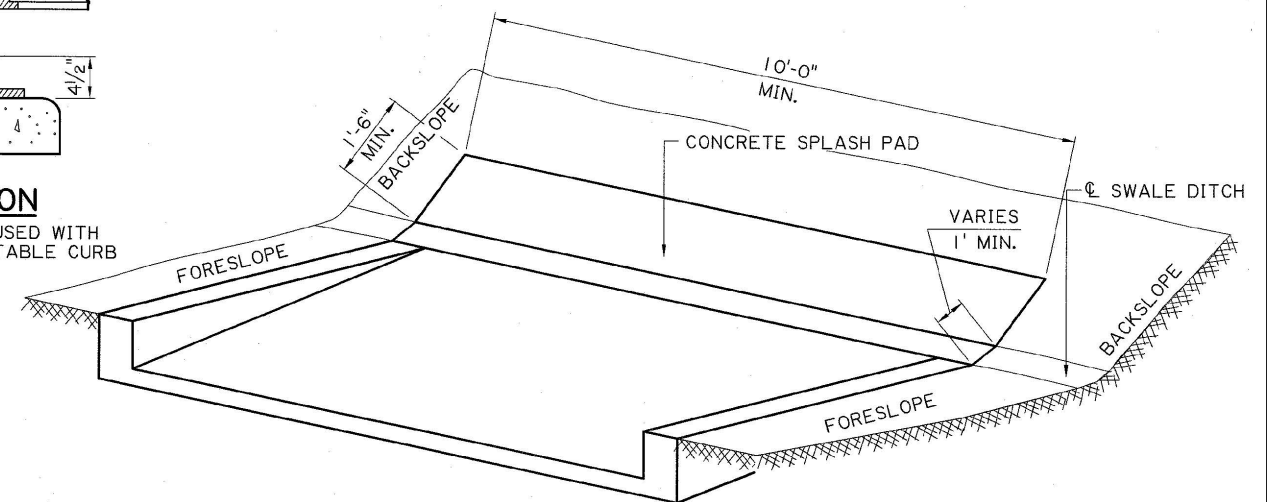


PARTIAL VIEW SHOWING PAVED GUTTER DRAIN WITHOUT DROP INLET

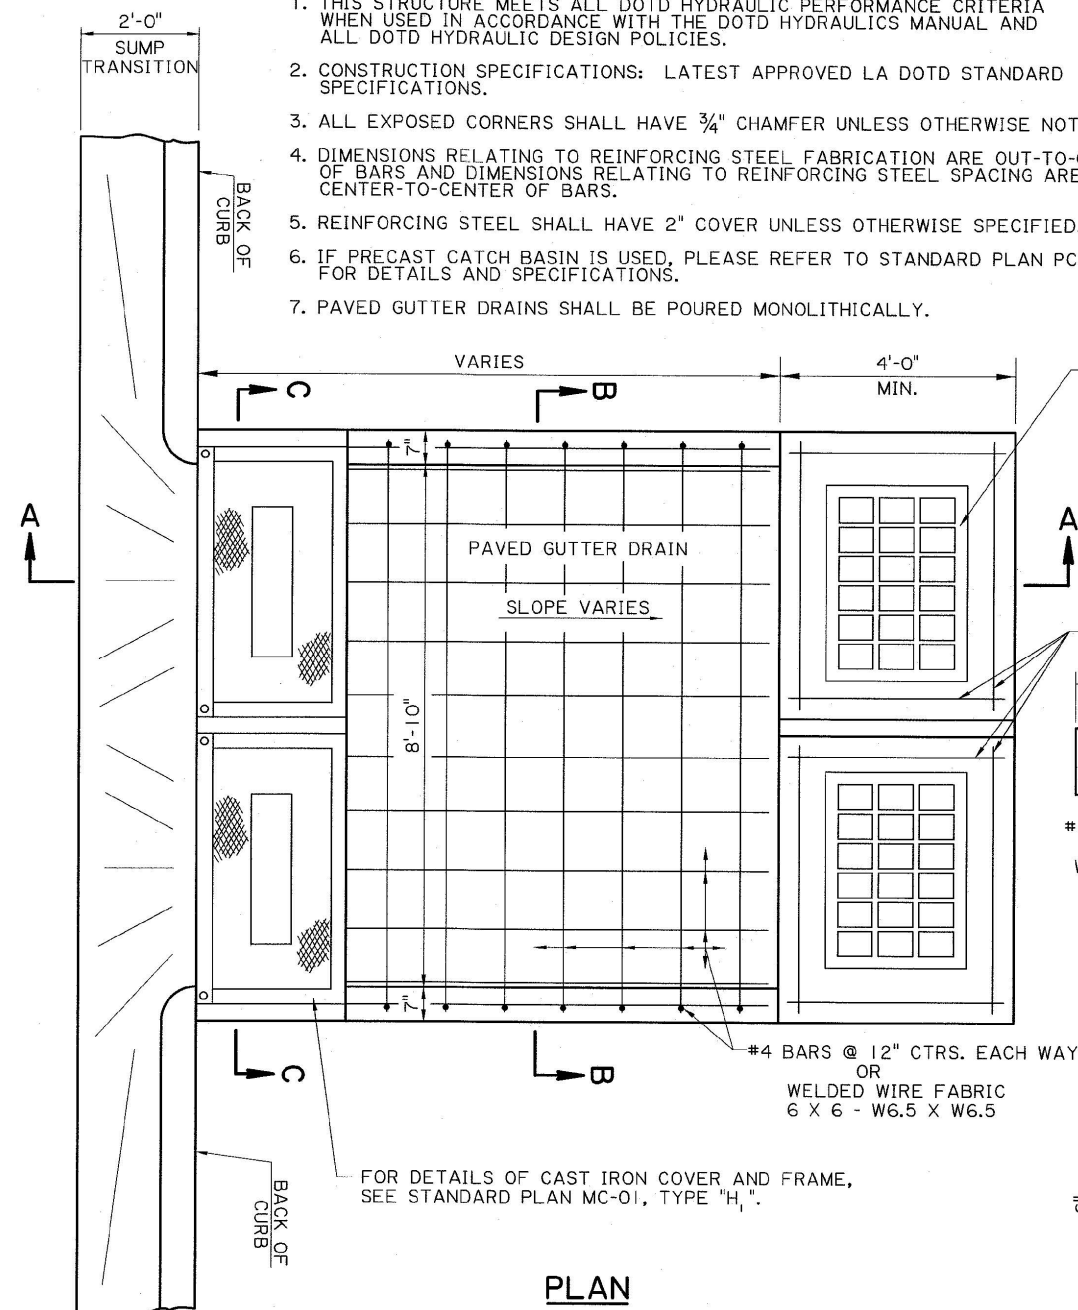


PLAN


FOR GRATE AND FRAME DETAILS, SEE APPROPRIATE CATCH BASIN STANDARD PLAN OR SPECIAL DETAIL AND STANDARD PLAN MC-01.

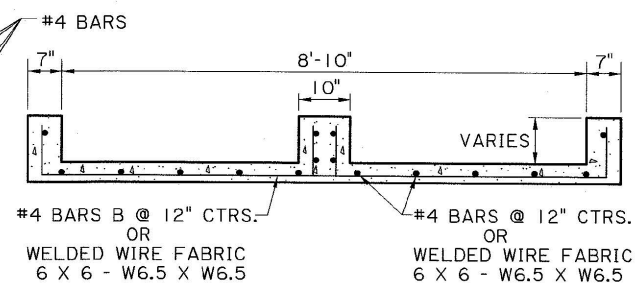


SECTION C-C
(CAST IRON COVER NOT SHOWN)

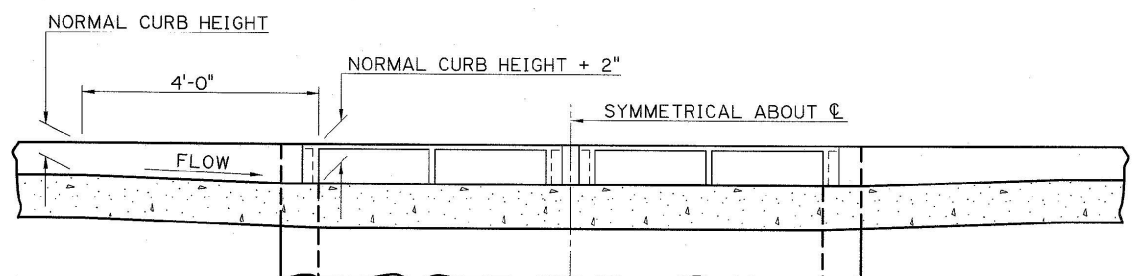


TRANSITION IN CURB HEIGHT GUTTER DRAIN AT LOW POINT

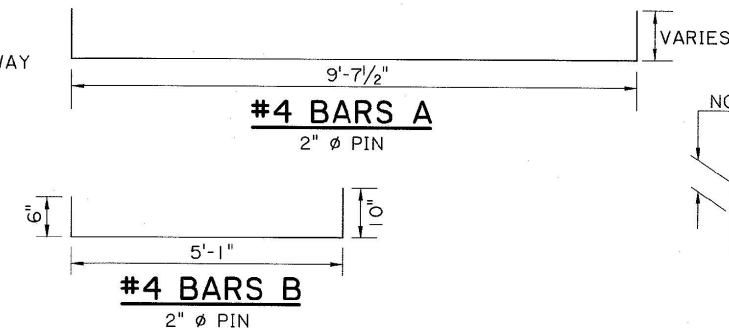


SECTION A-A

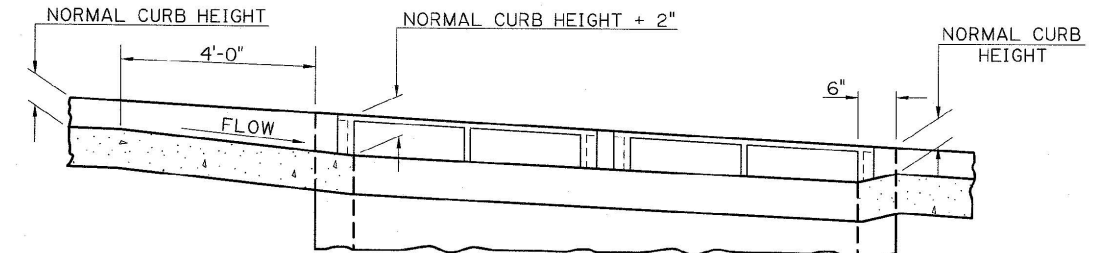

TRANSITION IN CURB HEIGHT GUTTER DRAIN ON A GRADE

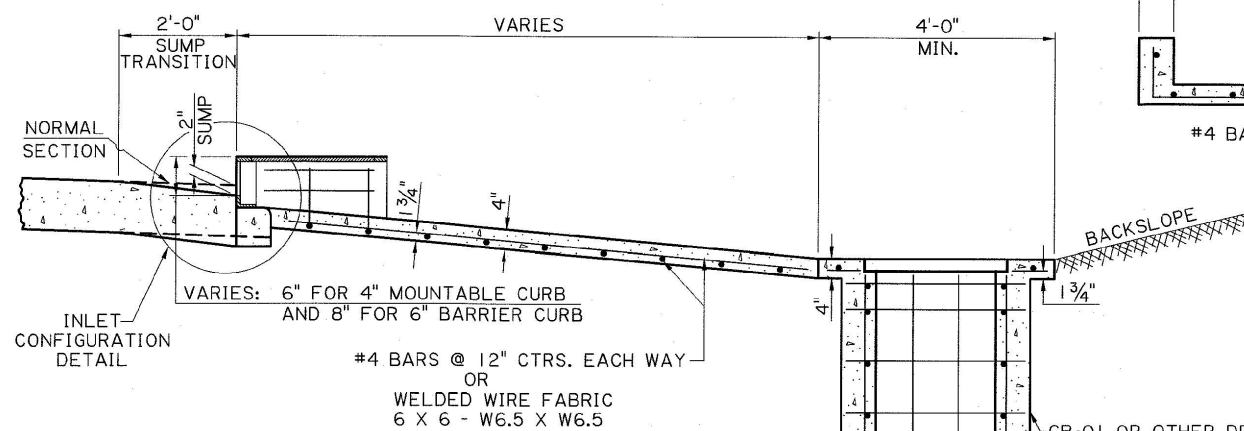

SECTION B-B

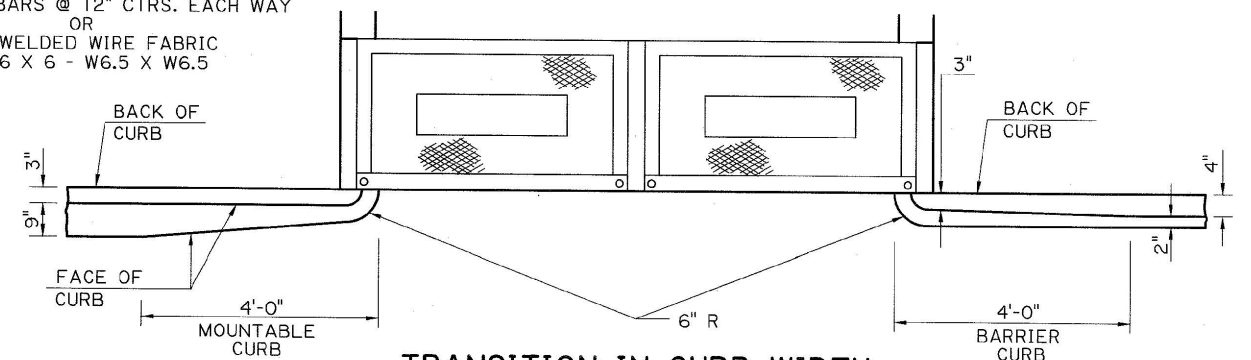

TRANSITION IN CURB WIDTH
(TYPICAL)

SHEET NUMBER		DATE		BY	
PARISH		CONTROL SECTION		STATE PROJECT	
DESIGN	CHECK	DETAIL	CHECK	REVIEW	SERIES
APPROVED BY CHIEF ENGINEER:				DATE: 6/1/2024	
REVISION OR CHANGE ORDER DESCRIPTION					
NO. DATE					
DOUBLE PAVED GUTTER DRAIN					
PG-DRAIN (DOUBLE)					
STANDARD PLAN					