
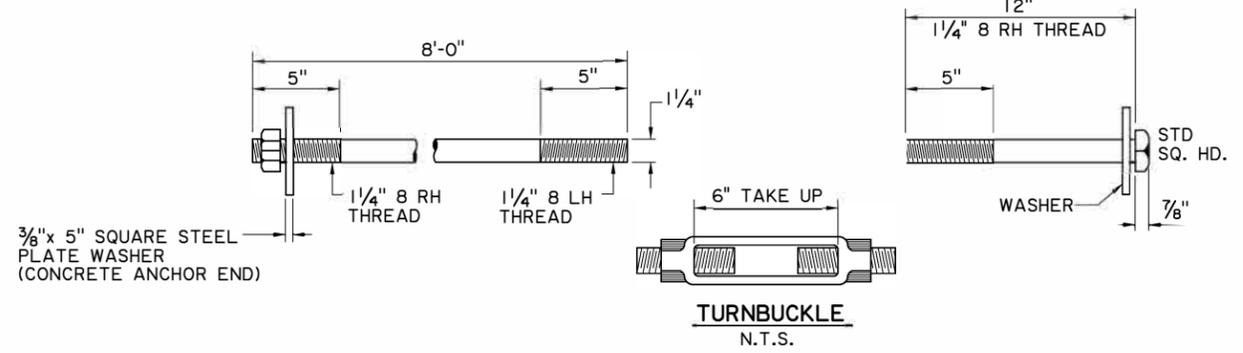


- GENERAL NOTES:**
1. FOR OTHER DETAILS NOT SHOWN (STEEL POST, TIMBER BLOCKOUT, GUARDRAIL, ETC.), SEE THE OTHER PLAN SHEET AND THE GUARDRAIL STANDARD PLANS OF THE LOUISIANA DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT.
 2. ROUNDED W-BEAM END SECTION SHALL CONFORM WITH AASHTO M-180 CLASS "A". ANCHOR ROD CONNECTOR PLATE AND ANCHOR ROD PLATE WASHER SHALL CONFORM TO ASTM A-36 STEEL.
 3. GUARDRAIL FLARED END TREATMENT MEETS TEST LEVEL 2 (TL-2) NCHRP350 ACCEPTANCE CRITERIA. REFERENCE FHWA ACCEPTANCE LETTER CC-62.
 4. A DESIGN EXCEPTION IS REQUIRED TO USE THIS TL-2 GUARD RAIL END TREATMENT.
 5. PAY ITEM: 704-10-00105

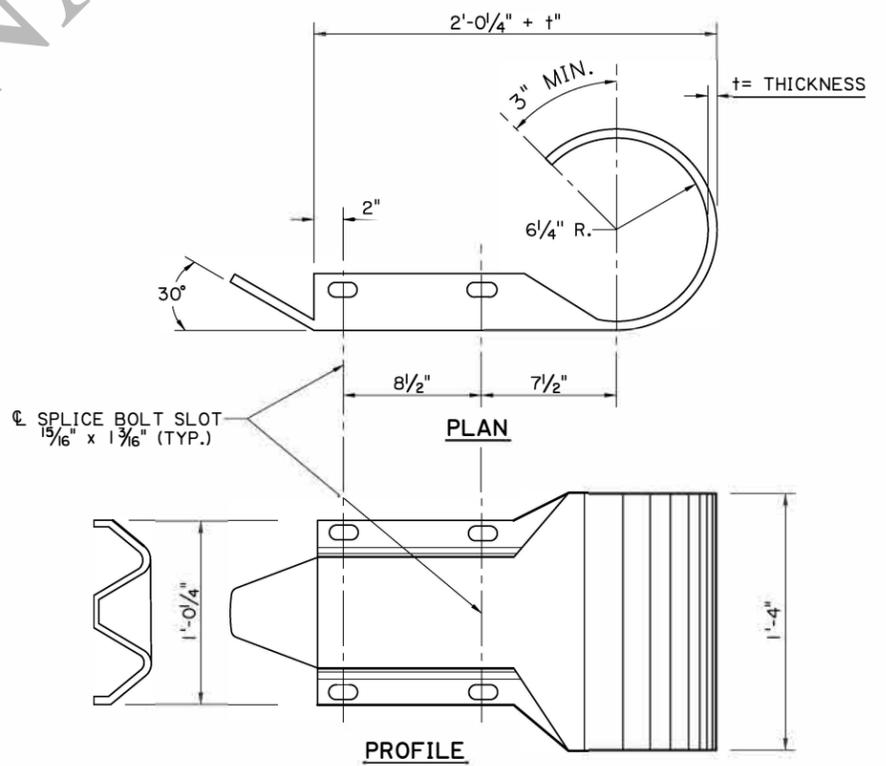

MIN. TENSILE STRENGTH 60,000 LBS.
LOAD APPLIED THROUGH ASSEMBLY
(ANCHOR ROD AND TURNBUCKLE)

SHEET NUMBER		PARISH		CONTROL SECTION		STATE PROJECT	
DESIGN	A. HERATH	CHECK	R. OWENS	DETAIL	D. HYMEL	CHECK	A. HERATH
REVIEW	K. BRAUNER	SERIES # 1 OF 2					
NO.	DATE	REVISION OR CHANGE ORDER DESCRIPTION		BY			
		GUARD RAIL END TREATMENT (FLARED, 12'-6") SPECIAL DETAILS					
BD-2.6.4-2.1B							
BRIDGE AND STRUCTURAL DESIGN							