STATE PROJECT	PARISH	SHEET No.

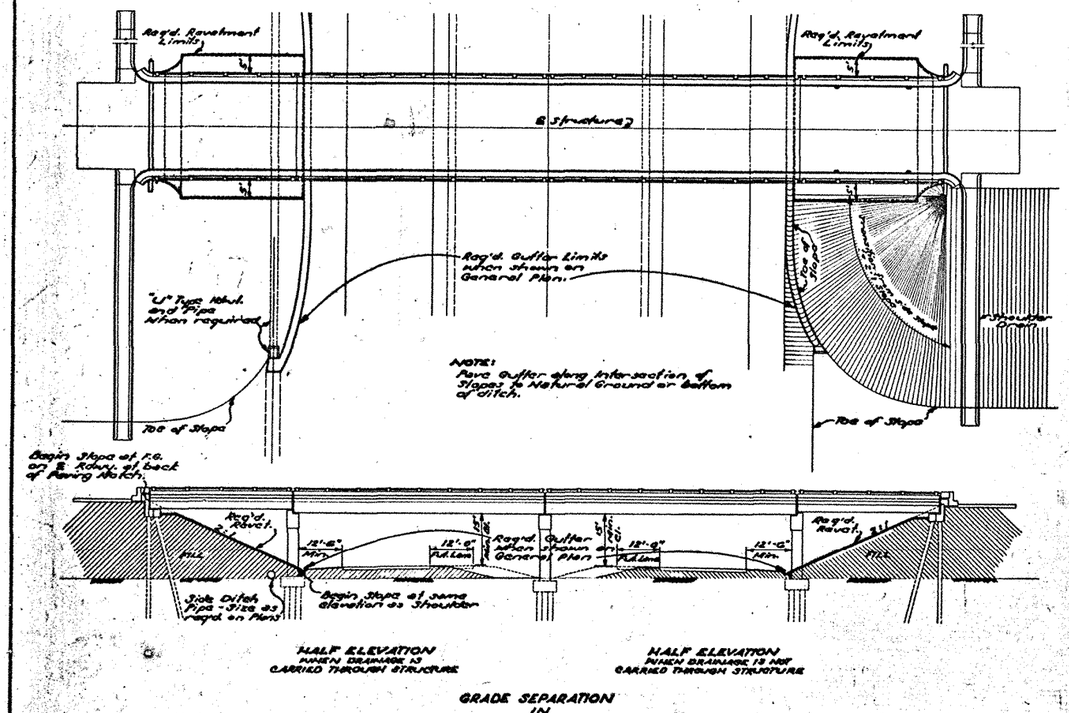

GRADE SEPARATION IN FILL SECTION

NOTE:
Fill or cut slope under each end of structure is to be not steeper than 2:1 normal to ℄ of Roadway being crossed.

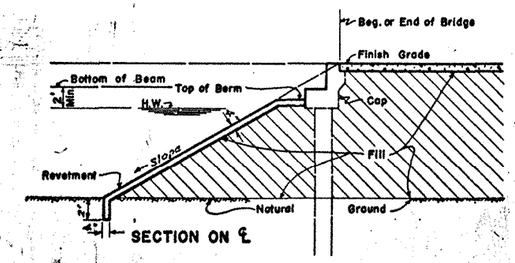



VIEW NORMAL TO SURFACE

NOTE:
Slur-Ray to be carried over top of Berm unless otherwise shown on Plan. If slur-ray is stopped below Berm level, 6" lap will be required.

NOTE:
Area of Revetment shown is quantities off to other surfaces and plan area of the Slab projection as shown on the plans.

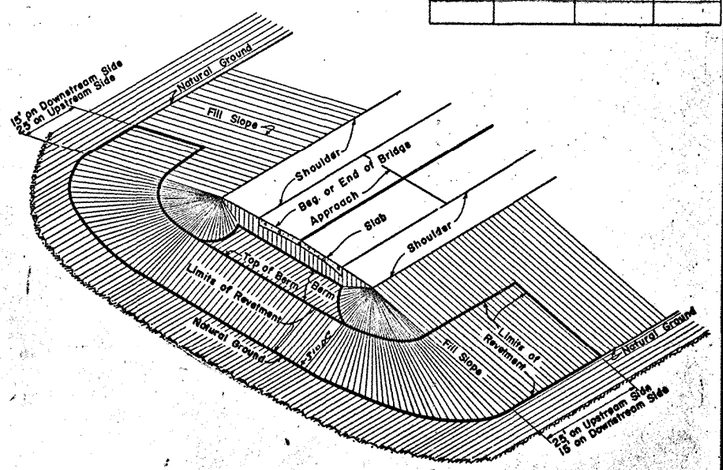

REVETMENT DETAILS FOR BRIDGE STRUCTURES

[TO BE PAID FOR UNDER ITEM 5-19-3, CONCRETE CAST-IN-PLACE REVETMENT (4" THICK)]

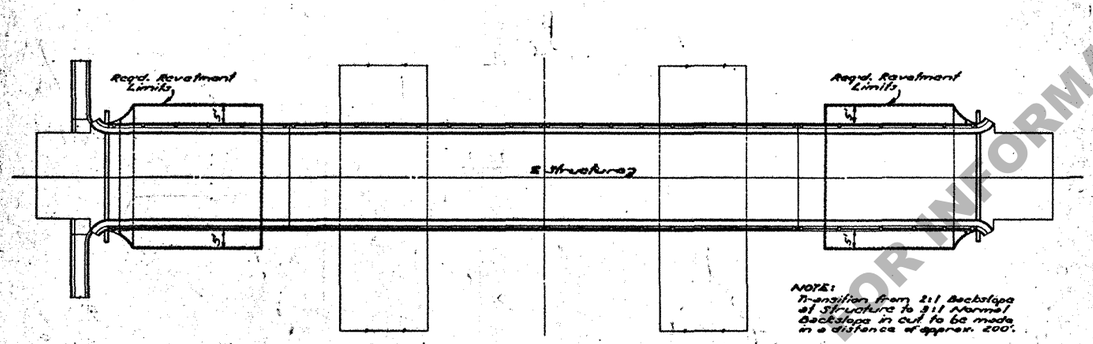

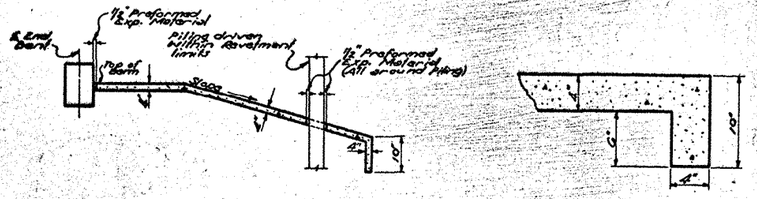

SECTION ALONG ℄ — SECTION OF END AND SIDE TOE WALLS

CONCRETE CAST IN PLACE REVETMENT (4" THICK)



VIEW NORMAL TO SURFACE

NOTES:
Surface to be grooved so that no section shall exceed 20 ft². All Grooves to be a min. of 1" deep.
½" Preformed Exp. Material included in cost bid on Revetment pay item.
Extend Revetment 5' beyond outside edge of Bridge.
Area of Revetment shown in quantities will be actual surface area plus area of toe wall projections as shown on this sheet.



PAVED GUTTER SECTION (TO BE PAID FOR AS CAST-IN-PLACE REVETMENT)

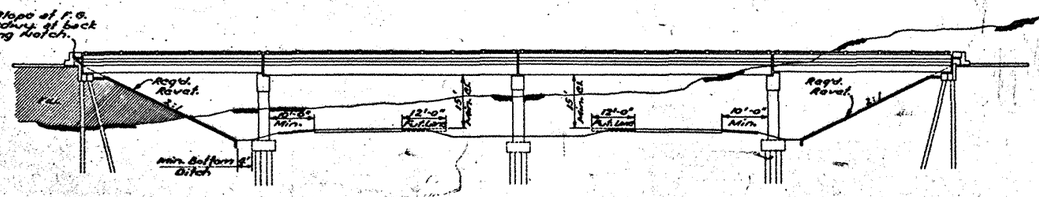

GRADE SEPARATION IN CUT SECTION

REVETMENT AND PAVED GUTTER DETAILS FOR GRADE SEPARATION STRUCTURES

[TO BE PAID FOR UNDER ITEM 5-19-3, CONCRETE CAST-IN-PLACE REVETMENT (4" THICK)]

DATE	DESCRIPTION	BY
5-23-59	Limits Br. Struct. Revet.	

REVISIONS

STANDARD PLAN
REVETMENTS & PAVED GUTTERS
FOR
BRIDGE & GRADE SEPARATION STRUCTURES

DATED O.C. 16, 1959

STATE OF LOUISIANA
DEPARTMENT OF HIGHWAYS

DESIGNED	DETAILED J.B.K.	TRACED	
CHECKED	CHECKED	CHECKED	

BRIDGE DESIGN SECTION

C. M. 196

FOR INFORMATIONAL PURPOSES ONLY