

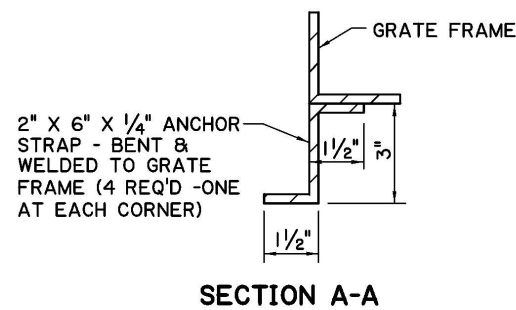


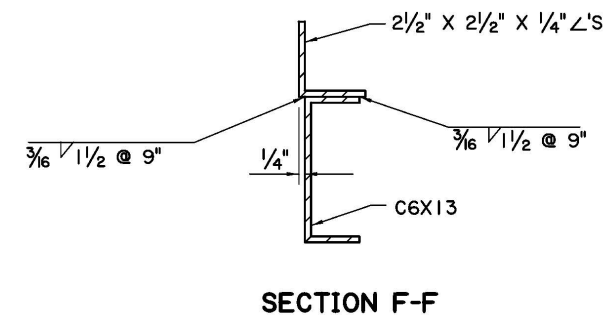

NOTES: 1. GRATE FRAME TO BE GALVANIZED AFTER FABRICATION
2. WEIGHT OF GRATE FRAME = 52 LBS
3. SQUARE PUNCH HOLE PRIOR TO GALVANIZING. ADD A $\frac{3}{8}$ ϕ x $2\frac{1}{4}$ " LONG -16 UNC ROUND HEAD SQUARE NECK CARRIAGE BOLT WITH JAM NUT, HEX HEAD NUT, AND FLAT WASHER (ALL STAINLESS STEEL) AFTER FRAME IS GALVANIZED.

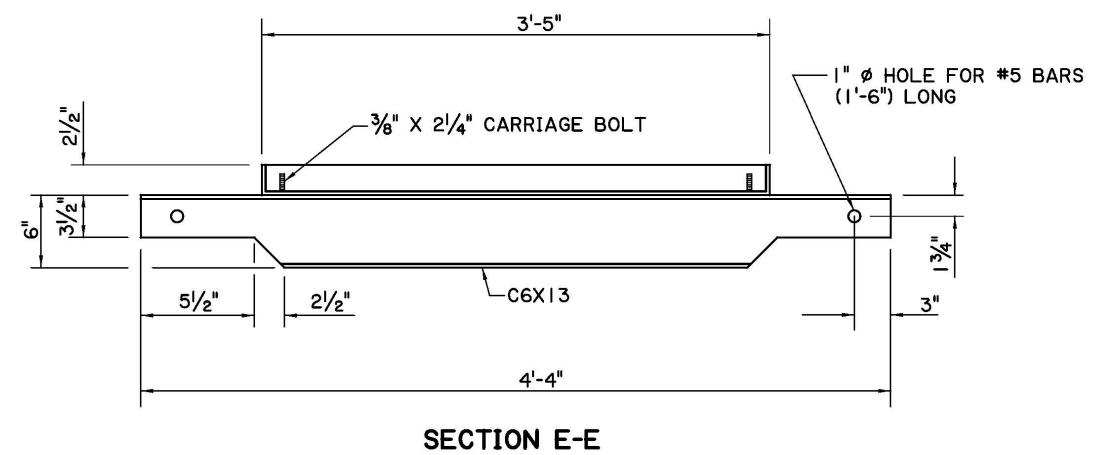

NOTES: 1. GRATE FRAME TO BE GALVANIZED AFTER FABRICATION
2. WEIGHT OF GRATE FRAME = 52 LBS ± 5%
3. SQUARE PUNCH HOLE PRIOR TO GALVANIZING. ADD A $\frac{3}{8}$ Ø x 2 $\frac{1}{4}$ " LONG -16 UNC ROUND HEAD SQUARE NECK CARRIAGE BOLT WITH JAM NUT, HEX HEAD NUT, AND FLAT WASHER (ALL STAINLESS STEEL) AFTER FRAME IS GALVANIZED.