


Louisiana Transportation Infrastructure Fund

January 2026



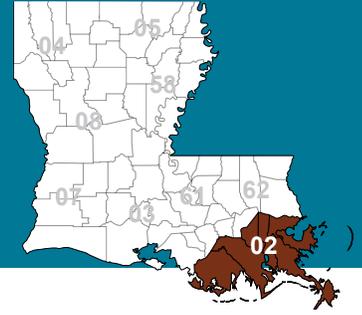

LA 18 in Jefferson Parish



Asphalt patching done in "lifts" on U.S. 61 in St. Charles Parish

LA 18/18S

Work has been completed on state project #4400033222 (LA 18/18S) for asphalt concrete milling and overlay, pavement patching, and pavement markings in Jefferson Parish. Traffic signal loop detectors were installed at several intersections during January to wrap up the job. The 1.2-mile project, which is awaiting final inspection, had approximately 2,300 tons of asphalt laid. The project has a current estimated total cost

of \$933,410.85, of which \$703,868.51 has been paid thus far.

Guardrail Retainer Contract

Contract guardrail repairs totaling \$10,225.06 occurred in Orleans Parish during January. District 02 has spent a total of \$108,660.38 thus far this fiscal year for guardrail repairs.

U.S. 61: LA 50 to Ormond Boulevard

State project #4400033223 covers approximately 3.5 miles of U.S. 61/Airline Highway in St. Charles Parish. This project began work in January with locations being marked out in the earlier part of the month and patching operations commencing mid-month. No payments have been made yet on this project, which was awarded to Barriere Construction in the amount of \$1,196,211.60.

New Project Updates

- Two notices to proceed were issued on January 28 for project #4400033864 (LA 308 pavement patching) in Lafourche Parish and project #4400034446 (LA 3151 - Humble Road cross drain) in Jefferson Parish. This project was awarded to TLP Construction, LLC at a cost of \$52,900.
- Project #4400033943 for districtwide signal detection repairs was let on December 18. The job was awarded to Diamond Electrical Co, Inc. in the amount of \$1,017,951.25, which covered the base bid and two additive alternate locations. The project award amount was reduced to \$915,379.35 due to the removal of additive alternate 2. The work locations for this districtwide project to install video detection equipment at traffic signal intersections are in Jefferson, Orleans, Plaquemines, St. Bernard, and St. Charles parishes


Spending

Spending Category and Amount Spent Since July 1, 2025

- **Materials:** \$0.00
- **Contracts:** \$1,750,483.76
- **Equipment/rentals:** \$0.00

DOTD District 02

Jefferson
Lafourche
Orleans
Plaquemines
St. Bernard
St. Charles
Terrebonne

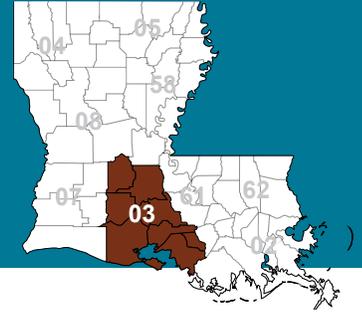

Winter Storm Fern

During the last week of January, district forces and resources were used across the state, working around the clock to apply salt/brine and clear roadways of ice, snow, and debris in an effort to keep motorists moving safely before, during, and after the Winter Storm Fern.

Contracts

- A total of \$20,220.00 was paid toward the District 03 guardrail repair contract this month for the repair of guardrail located on I-49 in Lafayette and St. Landry parishes, I-10 and LA 13 in Acadia Parish, and LA 343 in Lafayette Parish.
- Three maintenance sweeping contracts covering the major thoroughfares of District 03 were awarded this month, totaling \$208,840.78:
 - I-49 from I-10 north to the Avoyells Parish line
 - I-10 from the Jefferson Davis Parish line across the Atchafalaya Basin Bridge to Ramah
 - U.S. 90 from Broussard to Morgan City
- An expense of \$100,332.92 in payments toward the additional cycles on current maintenance mowing and litter contracts was finalized.
- A notice to proceed has been executed for the bridge approach slab undersealing repair project involving designated structures in Acadia, Lafayette, and St. Martin parishes, awarded in the amount of \$429,110.00. Project startup is now expected to be the latter part of February.
- The contract for repairing 254 linear feet of concrete barrier across 25 designated locations in Acadia, St. Martin, and St. Landry parishes that was awarded in the amount of \$511,940.00 is scheduled to commence in early February, pending weather conditions.
- The cross drain replacement contract for LA 13 in St. Landry Parish has been awarded in the amount of \$267,583.71.

Materials

- Asphalt material funds allocated for repairing roadway shrinkage cracking and pavement faulting:
 - \$5,039.00 expensed for continued work on LA 82 in Vermilion Parish
 - \$9,477.00 expensed for work performed on LA 70 in St. Mary Parish
 - \$22,726.00 (241.77 tons) expensed for work performed on LA 345 in St. Martin Parish

- Other areas designated for these funds are LA 674, LA 14, and LA 182 in Iberia Parish, along with LA 103 in St. Landry Parish and LA 104 in Evangeline Parish
- \$18,868.00 of fuel cost in support of overlay projects.
- \$2,586.00 expensed for the brake motor repair on the Loreauville (RC 006210) bridge in Iberia Parish.
- \$444,540.00 has been allocated to purchase striping materials for districtwide striping applications to continue throughout this fiscal year.
- Moveable bridge sewer treatment plants, purchased for \$28,940.00, arrived at the District 03 headquarters facility this month in preparation for installation at the Adeline and Humble Canal bridges.
- District 03 took delivery this month of a repurposed railcar purchased for \$14,999.00, which will be used in the event of an emergency bridge/culvert repair in an effort to prevent extensive bridge and road closures.


DOTD District 03

Acadia
Evangeline
Iberia
Lafayette
St. Landry
St. Martin
St. Mary
Vermilion

Spending

Spending Category and Amount Spent Since July 1, 2025

- **Materials:** \$575,778.80
- **Contracts:** \$377,967.08
- **Equipment/rentals:** \$303,285.78

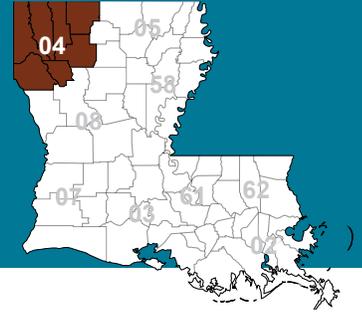

Shur-Curb delineator system at Exit 8 on I-20 westbound



District 04's new cold planer

Roadway Improvements: Overlay and Safety Projects

U.S. 371 Overlay in Red River Parish

District 04 in-house maintenance crews continued hot mixing highways. They laid fresh asphalt on portions of U.S. 371 in Red River Parish. The hot mix crew put down 2,182.95 tons of blacktop across 2.46 miles. 650 linear feet of yellow tape is being used for temporary striping until it can be striped.

New Equipment for District 04

A new piece of equipment has arrived in District 04. The district received a CP40G cold planer. This piece of equipment is designed to easily attach to the John Deere skid steers that are already in the district's equipment inventory. The CP40G is designed to assist with street repairs and some smaller asphalt milling jobs. This purchase price came to \$34,412.40.

Safety Devices on I-20 Westbound

DOTD forces installed a Shure-Curb delineator system on I-20 westbound at Exit 8. This system is designed to keep traffic exiting at the off-ramp on the proper roadway. The price for materials was \$2,019.80.


DOTD District 04

Bienville
Bossier
Caddo
Claiborne
DeSoto
Red River
Webster

Spending

Spending Category and Amount Spent Since July 1, 2025

- **Materials:** \$3,077,317.86
- **Contracts:** \$692,414.92
- **Equipment/rentals:** \$34,918.40

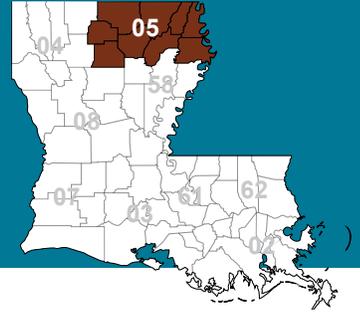

Bridge on LA 34 before repairs in Jackson Parish



Metal shim cap and added timber beams for support

Bridge Repair Necessary on LA 34 in Jackson Parish

In Jackson Parish on LA 34 south of Chatham, a bridge was closed for necessary repairs. Inspection of this bridge showed two timber piles that were no longer supporting the weight of the concrete bridge cap. The gaps were repaired using metal shim plates to help in the stabilization of the bridge. Two 12"x12" timber beams were also used to help support the piles that were non-bearing. Four 25-foot timber piles were used in this project, using supplemental funding with a cost of \$2,649.24.

Installation of Districtwide Radar Detection Equipment

Districtwide signal crews began the installation of new radar detection equipment purchased with supplemental funds. In January, the signal crew began installing the radar detection and completed two intersections at U.S. 80, and one at LA 34 in Ouachita Parish. Material cost for this project was \$28,065.00. A total of 18 intersections will be replaced or ungraded with the new radar detection equipment.

New Equipment Purchases with Supplemental Funding

- Two John Deere 333 skid steers for \$201,003.00
- One 240VT split dum towable roller for \$99,905.00
- One Husqyama FS5000D concrete wheel saw for \$38,079.00


Spending

Spending Category and Amount Spent Since July 1, 2025

- **Materials:** \$618,072.65
- **Contracts:** \$149,520.44
- **Equipment/rentals:** \$338,987.00

DOTD District 05

East/West Carroll
Jackson
Lincoln
Madison
Morehouse
Ouachita
Richland
Union

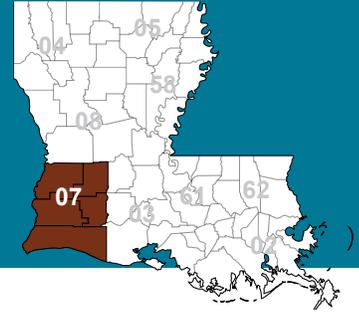

The new excavator located in Allen Parish

Contract Awarded

State Project 4400033908

The contract for LA 397: ditch and pipe cleaning from LA 14 to Swift Plant Road in Calcasieu Parish was awarded to Traffic Commander. This 4.8-mile project consists of the cleaning of 37,236 linear feet of ditch and 2,798 linear feet of pipe. Work is estimated to begin mid-February. Bid: \$362,140.

Contracted Guardrail Repair

In January, 15 guardrail locations were repaired by a contractor in District 07. There was one location on LA 110 in Beauregard. In Calcasieu, there were seven repairs on I-210 and four on I-10. Jefferson Davis had three locations repaired on I-10. Estimated cost in supplemental funds: \$66,736.

State Project 4400029982 Update

Final payments totaling \$314,724 have been made to Siema Construction for the completion of the drainage system repair project, which began in June 2025. This project included drainage repairs along I-210 frontage roads and Broad Street in Calcasieu Parish.

Maintenance Materials

In January, district sign crews installed 365 signs and 396 sign posts throughout District 07's five parishes. Total supplemental funding costs: \$15,667.

The Beauregard maintenance unit used hot mix asphalt to patch shoulders on LA 26 and LA 27. A total of 52.22 tons was used for a funding cost of \$5,849.

The Calcasieu maintenance unit patched a location on LA 14 using 23.96 tons of hot mix asphalt. Material cost: \$2,684.

Traffic Signal Improvements

The districtwide signal crew is replacing signal heads with polycarbonate material at five intersections within District 07. By using this lighter material for the signal heads, the vertical clearance will increase at the intersections. Two signals were completed in January: U.S. 165 at LA 383 in Allen Parish and LA 1138-2 Prien Lake at Creole Street in Calcasieu Parish. Materials cost \$12,283.

Equipment

In January, District 07 received two pieces of maintenance equipment. A trailer mounted pothole patcher (Durapatcher) was assigned to the Cameron maintenance unit. Potholes are the number one complaint received by the district. This piece of equipment will allow district forces to make longer lasting repairs to the roadway.

A tracked excavator was received and assigned to the Oberlin maintenance unit in Allen Parish. This piece of equipment has already been used on multiple work locations this month. In-house forces used this piece of equipment to remove tree limbs hanging over the roadway, cleaned shoulders of grass and dirt, removed a fallen tree from the roadway, cleaned culverts of debris, and removed a beaver dam to help with drainage. Total cost of equipment: \$250,631.


Spending

Spending Category and Amount Spent Since July 1, 2025

- **Materials:** \$1,001,525.08
- **Contracts:** \$731,844.68
- **Equipment/rentals:** \$277,309.00

**DOTD
District 07**

Allen
Beauregard
Calcasieu
Cameron
Jefferson Davis

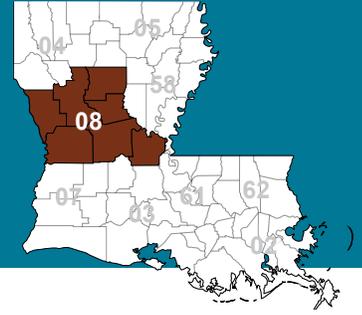

Rutbusting on LA 1 in Rapides Parish

Patch, Mill, and Overlay Projects

In January, in-house crews milled and overlaid rutted sections of LA 1 just north of LA 3170 in Rapides Parish using 382.36 tons of hot mix asphalt at a cost of \$39,383.08. In Sabine Parish, in-house crews full-depth patched base failures on LA 476 using 215.54 ton of hot mix asphalt at a cost of \$21,985.08. This project is ongoing.

Mowing/Litter Pickup

In January, \$34,077.54 was spent for additional mowing cycles on state routes within municipalities throughout the district.

Pavement Striping/Raised Pavement Marker Application Projects

District 08 continued using supplemental funds on pavement striping/raised pavement marker improvement projects across the district in January. In-house crews completed projects in Rapides and Winn parishes. In Rapides Parish, in-house crews striped an estimated 1,481 linear feet of roadway on LA 28 using hot tape. Additionally in Rapides Parish, in-house crews striped 2.69 line miles on U.S. 71. In Winn Parish, Unit 771 crews placed 5,000 raised pavement markers on LA 34, LA 126, and LA 1235. Pavement striping and raised pavement marker application projects have cost \$16,128.94 in January.

Wavetronix Detection Systems

District 08 purchased materials with supplemental funds to install Wavetronix Detection Systems throughout the district. In January, in-house crews installed new systems at eight traffic signals on U.S. 171 in Vernon Parish. These installations cost \$127,125.00 in supplemental funds.

Cable Barrier and Guardrail Repair

Supplemental funds are being used to repair damaged cable barrier and guardrail throughout the district in order to ensure roadway safety. In January, two sections of guardrail in Avoyelles Parish were repaired by a contractor at a cost of \$15,000.00.

Sign Repair/Replacement

In January, in-house crews replaced/repaired 276 damaged signs/posts in an effort to maintain roadway safety on LA 1, LA 6, LA 6-X, LA 9, LA 28, LA 34, LA 106, LA 114, LA 117, LA 120, LA 123, LA 153, LA 158, LA 174, LA 184, LA 452, LA 463, LA 496, LA 1179, LA 1206, LA 3041, U.S. 71, U.S. 165, U.S. 165-X, U.S. 167, and U.S. 171 in Avoyelles, Grant, Natchitoches, Rapides, Sabine, Vernon, and Winn parishes. Sign repair/replacement projects have cost \$5,085.79 in January.

Fast Facts

- District 08 rented an articulating boom 125-foot manlift to be used in Vernon and Sabine parishes for in-house crews to cut trees that pose a safety hazard.
- In preparation for winter weather response, materials were purchased for bulk storage of salt. Materials cost \$16,023.57. Additionally, District 08 purchased salt to be used throughout the district for \$105,134.40.


Spending

Spending Category and Amount Spent Since July 1, 2025

- **Materials:** \$1,539,107.95
- **Contracts:** \$1,921,224.01
- **Equipment/rentals:** \$9,619.00

**DOTD
District 08**

Avoyelles
Grant
Natchitoches
Rapides
Sabine
Vernon
Winn

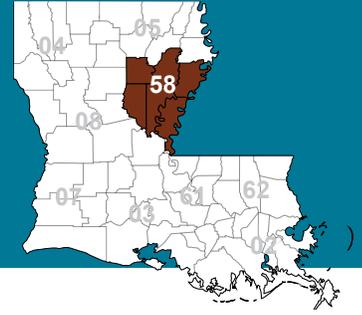

U.S. 84 in Jena ready for microsurfacing



U.S. 65 to be addressed by PCCP patching in Tensas Parish

Updates

District 58 awarded its tree removal contract for Caldwell, Franklin, and Tensas parishes on January 22 to Alison Enterprises, LLC for \$139,800.00.

The contract for joint repair on U.S. 65 was let but not awarded, and will be revisited at a later time.

A microsurfacing project for LA 130 in Franklin Parish is advertised and has a scheduled let date of February 19.

Design is nearing finalization of two additional projects that both intend to let by March: a microsurfacing project for U.S. 84 through Jena, and a PCCP patching project on U.S. 65 in Tensas Parish.

Tree Removal

The tree removal contract in LaSalle, Catahoula, and Concordia awarded to Traffic Commander, LLC is in the assembly period.

Herbicides

There were no new herbicide applications during January. Applications won't begin again until the spring.

Microsurfacing

The project on U.S. 84 has been winterized and will begin in spring when the weather allows.

Striping Miles in January

Striping was delayed by weather in January and will begin again as the weather allows.

Future Projects:

- Joint rehabilitation on U.S. 65
- Signal upgrade on U.S. 425 in Franklin Parish
- Asphalt overlay:
 - U.S. 84 in Concordia
 - LA 124 in Catahoula
 - U.S. 165 in LaSalle
 - LA 4 in Franklin
 - LA 133 in Caldwell
 - LA 605 in Tensas


Spending

Spending Category and Amount Spent Since July 1, 2025

- **Materials:** \$231,007.30
- **Contracts:** \$31,933.70
- **Equipment/rentals:** \$91,502.87

**DOTD
District 58**

Caldwell
Catahoula
Concordia
Franklin
LaSalle
Tensas

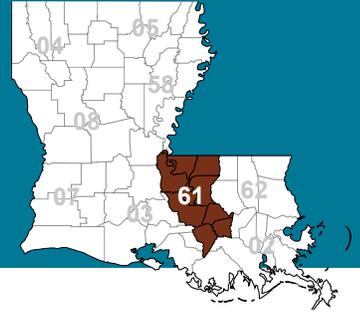

New asphalt on U.S. 190 eastbound in West Baton Rouge Parish



Guardrail repair before and after

Guardrail Repair

Two repairs were made on guard rails on U.S. 61 in Ascension and East Baton Rouge parishes, along with one repair on LA 3064. Two repairs were made on LA 402 in Assumption Parish. Two repairs were made in Iberville Parish on LA 75 and LA 993.

Pipe Installation

Pipe was installed and the ditches reshaped on LA 42 in Ascension Parish.

Asphalt and Patching

2,935 tons of asphalt were overlaid on the eastbound lane of U.S. 190 in West Baton Rouge Parish.

Sound Wall Cleaning

A contract is underway to clean and perform other certain preventative maintenance on the traffic-facing side of sound barrier walls along I-10 and I-12 in East Baton Rouge Parish.

DOTD District 61

Ascension
Assumption
East/West Baton Rouge
East/West Feliciana
Iberville
Pointe Coupee
St. James


Upcoming Projects:

- Tree removal along LA 409 in East Baton Rouge Parish
- Clearing and grubbing along U.S. 190 in East Baton Rouge Parish
- Drainage structure replacement in Ascension, East and West Baton Rouge, and East Feliciana parishes
- Ditch/pipe/box culvert cleaning in East and West Baton Rouge parishes
- Geo-lined pipe on LA 67 in East Feliciana Parish

Spending

Spending Category and Amount Spent Since July 1, 2025

- **Materials:** \$1,547,088.72
- **Contracts:** \$779,422.79
- **Equipment/rentals:** \$0.00

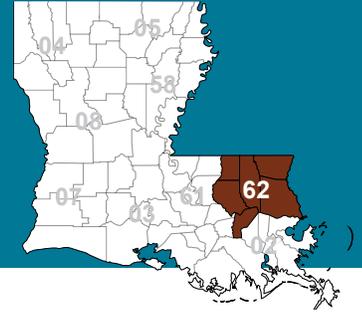

New striping on LA 59 in St. Tammany Parish



New overlay on LA 10 in St. Helena Parish

Roadway Striping

The yellow and white lines were refreshed around the islands off the I-12 ramps in Robert, along with the striping on LA 1065 in Tangipahoa Parish and LA 59 in St. Tammany Parish.

Guardrail Repair

Guardrail was repaired on I-12 and U.S. 190 in Livingston Parish, LA 43 in St. Helena Parish, and I-12 and LA 1064 in Tangipahoa Parish.

Asphalt Overlay

- 912 tons of asphalt were overlaid on LA 1031 in Livingston Parish.
- 762 tons of asphalt were overlaid on LA 1064 in Livingston Parish.
- 774 tons of asphalt were overlaid on LA 10 in St. Helena Parish.

Radar Detection

Radar detection equipment was installed on LA 10 at LA 21 in Bogalusa in Washington Parish.

Upcoming Projects:

- Box culvert, cross drain, and ditch cleaning throughout the district
- I-10 crack sealing
- Asphalt patching and overlays along several routes
- Tree removal along the interstate right-of-way
- Scrub seals on LA 10, LA 60, and LA 43

Fast Facts

- Using electromagnetic waves, radar detection systems can be used during the day or at night, unlike the conventional optical systems or infrared sensors.
- Radar systems are maintenance free and operate reliably, despite dirt or difficult weather conditions.
- Radar equipment can be installed onto existing infrastructure and do not require intrusive construction equipment or induction loops

Spending

Spending Category and Amount Spent Since July 1, 2025

- **Materials:** \$695,210.50
- **Contracts:** \$503,765.06
- **Equipment/rentals:** \$11,667.00

DOTD District 62

Livingston
St. Helena
St. John the Baptist
St. Tammany
Tangipahoa
Washington