



NOTE: WOODEN POSTS MAY BE USED IN CONJUNCTION WITH STEEL CORNER AND GATE POSTS, PROVIDED THAT WOODEN AND METAL POSTS ARE NOT MIXED BETWEEN CORNER POSTS.

* SEE ASTM A702 FOR DIMENSIONS AND DETAILS.

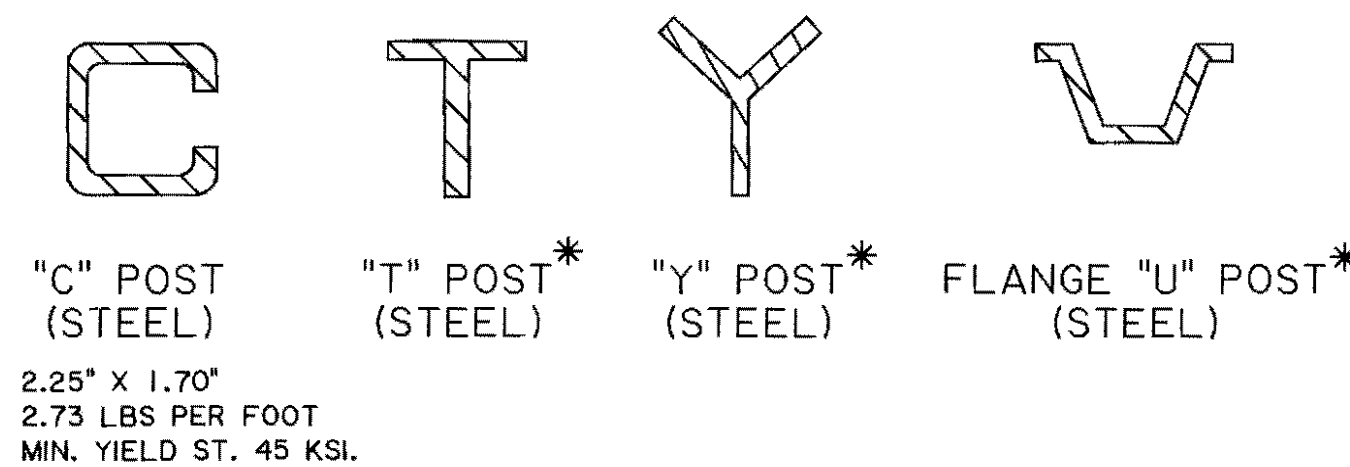


SUGGESTED TYPES OF STEEL FENCE POSTS


DETAIL OF A SUGGESTED TYPE HINGE PIN FOR GATES

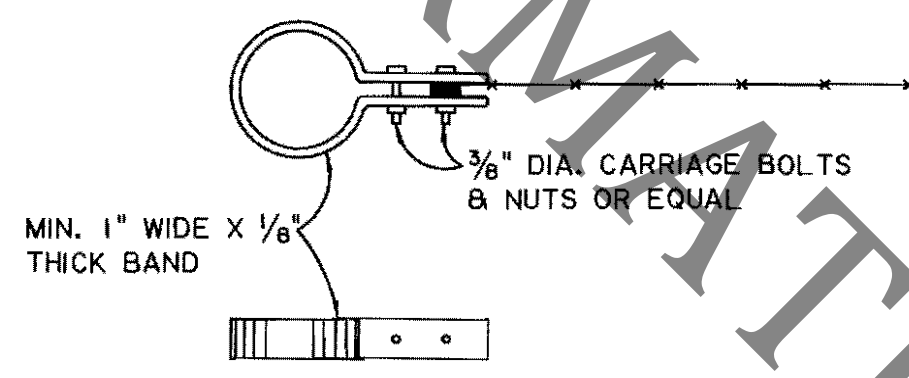

DETAIL OF SUGGESTED TYPE BAND

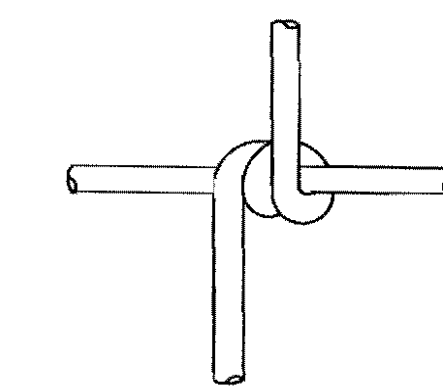


DETAIL OF HINGED JOINT



DETAIL OF STIFF STAY KNOT JOINT

LINE POST SHALL BE DRIVEN, TOP TO BE PROTECTED TO PREVENT BURRING. NOMINAL WEIGHT 1.33 * PER LINEAR FOOT (PRIOR TO FABRICATION).

SLOTS, NOTCHES OR APPROVED DEVICE FOR FASTENING WIRE TO POST. A MIN. OF 4 HORIZONTAL WIRES TO BE FASTENED TO THE POST FOR THE MESH WIRE. EACH BARB WIRE TO BE FASTENED TO THE POST.

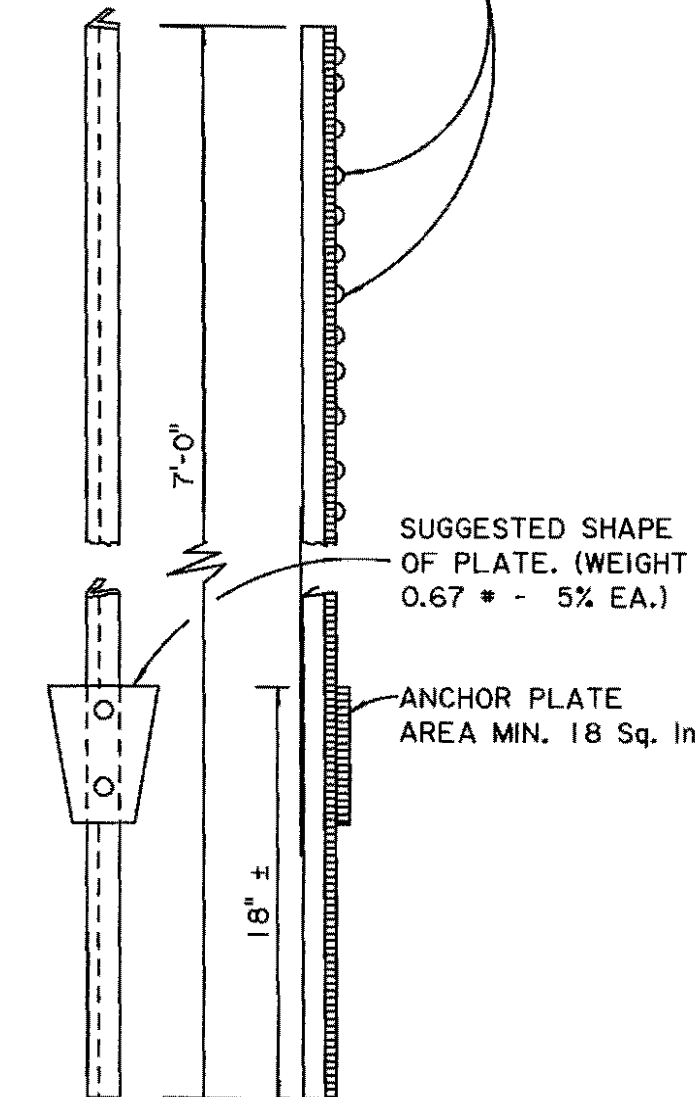


TYPICAL LINE POST

GENERAL NOTES:
GATES ARE TO OPEN AWAY FROM HIGHWAY UNLESS OTHERWISE DIRECTED BY ENGINEER.
ALL INTERSECTING FENCES TO BE SECURELY ATTACHED TO THE FRONTAGE FENCE AS SHOWN.
ALL STEEL POSTS, ANCHOR PLATES, BRACES AND HARDWARE SHALL BE GALVANIZED. (ASTM A 123)

BRACES SHALL BE PLACED ON STRAIGHT SECTIONS OF FENCE NOT MORE THAN 500' APART.
ALL LINE POSTS TO BE 7'-0\"/>





HORIZONTAL PANELS TO BE 0.051\"/>

TYPICAL SECTION THRU PANEL A-A

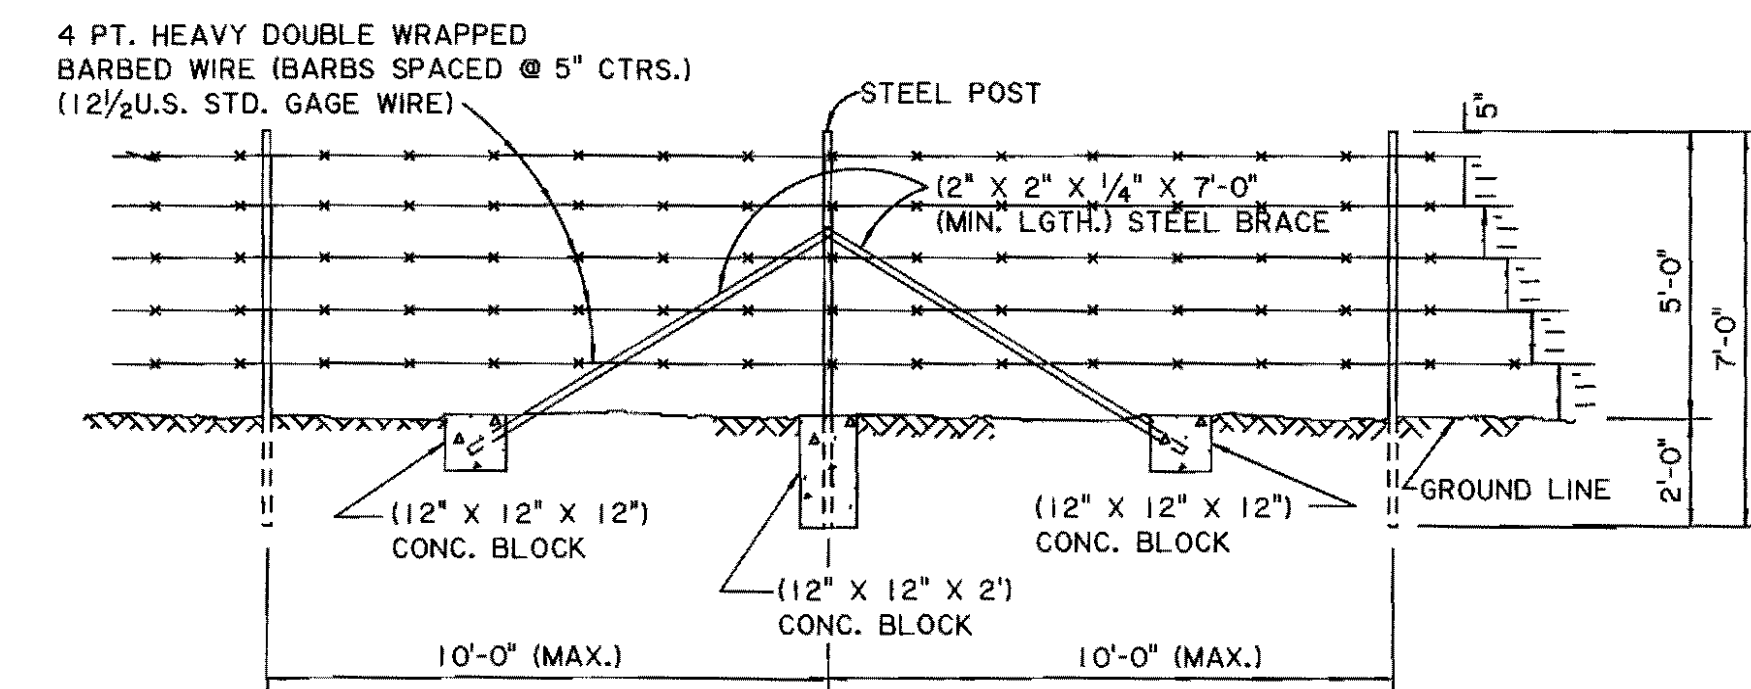


NOTE: BARBED WIRE TO BE FASTENED AT EVERY POST.

SHOWING BRACE IN STRAIGHT LINE OF FENCE

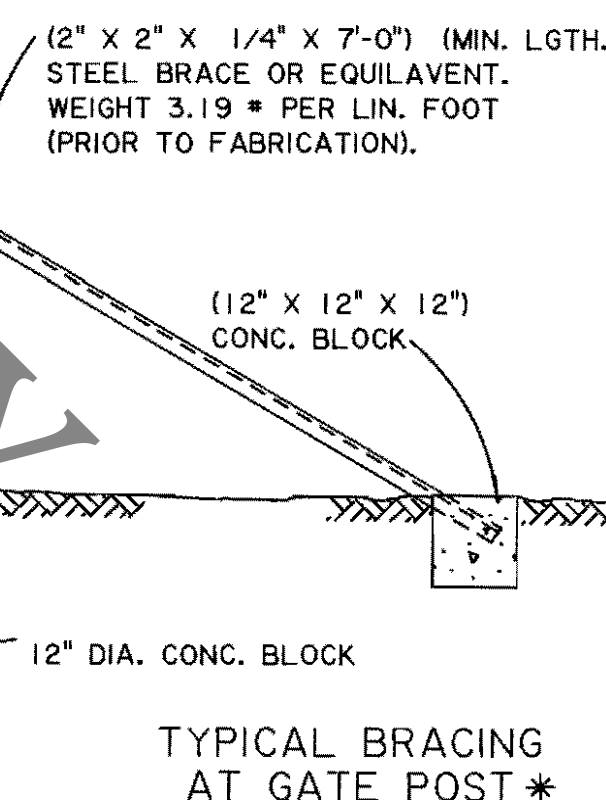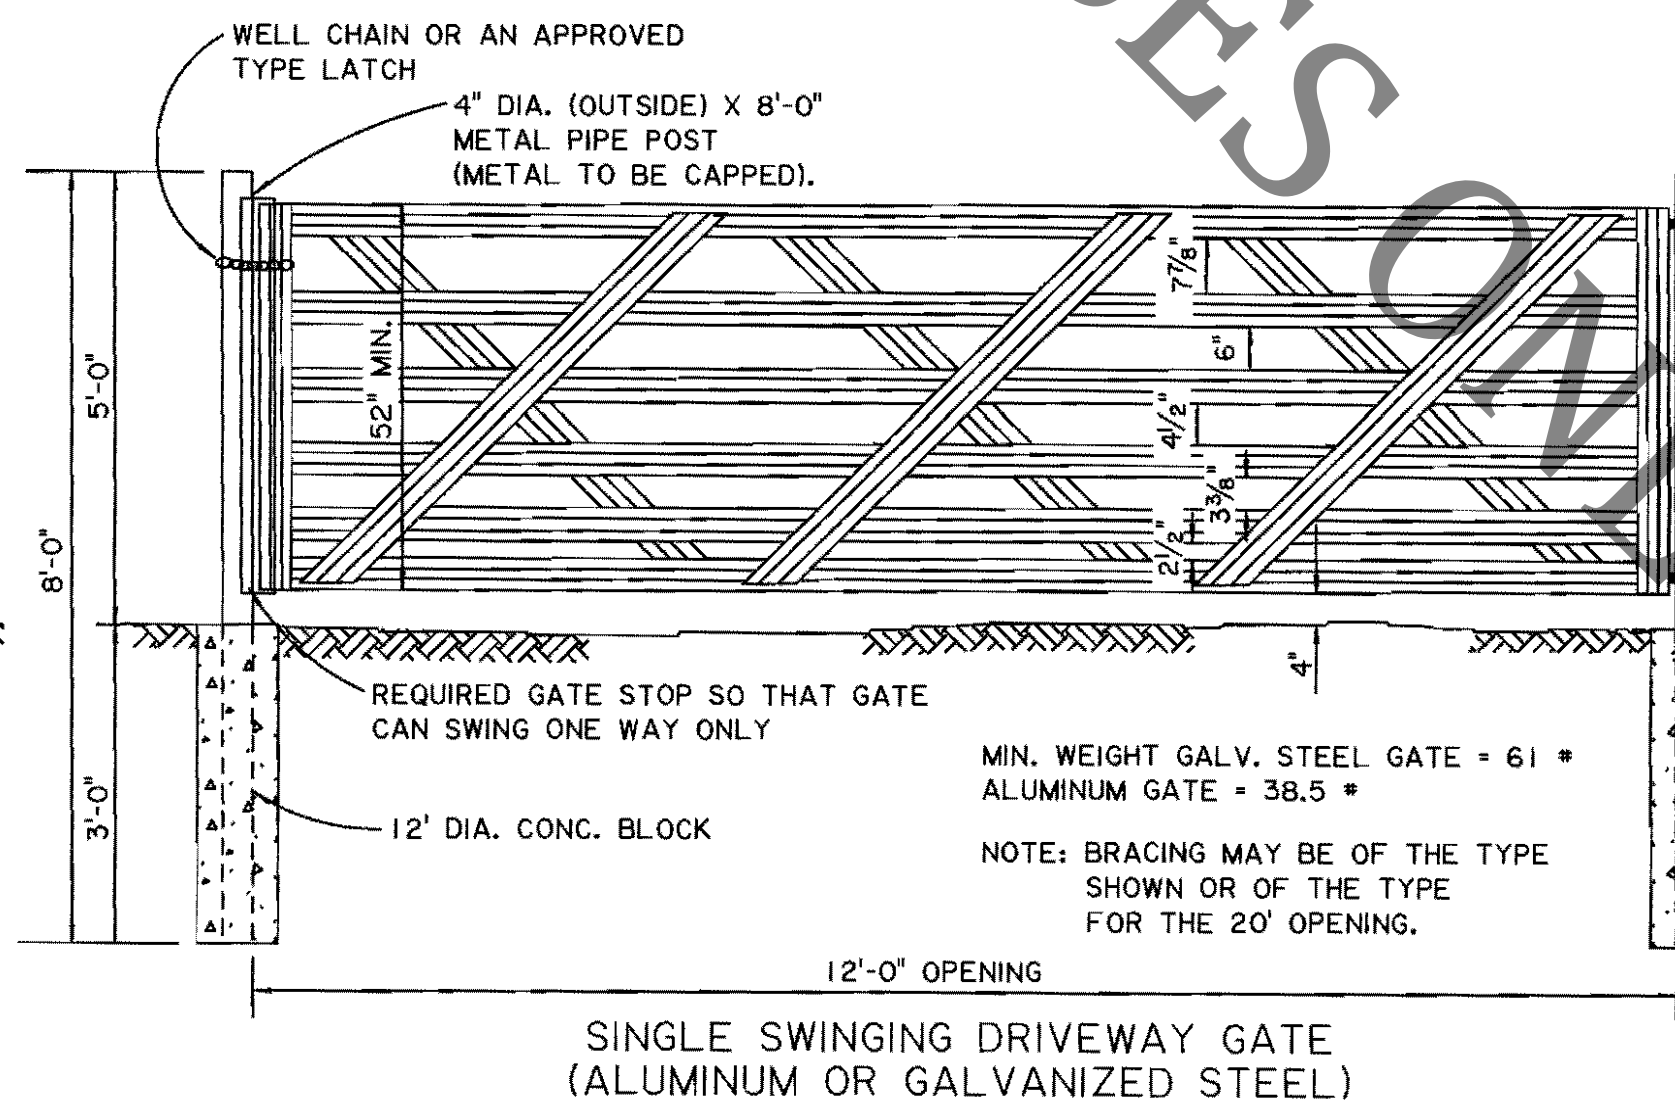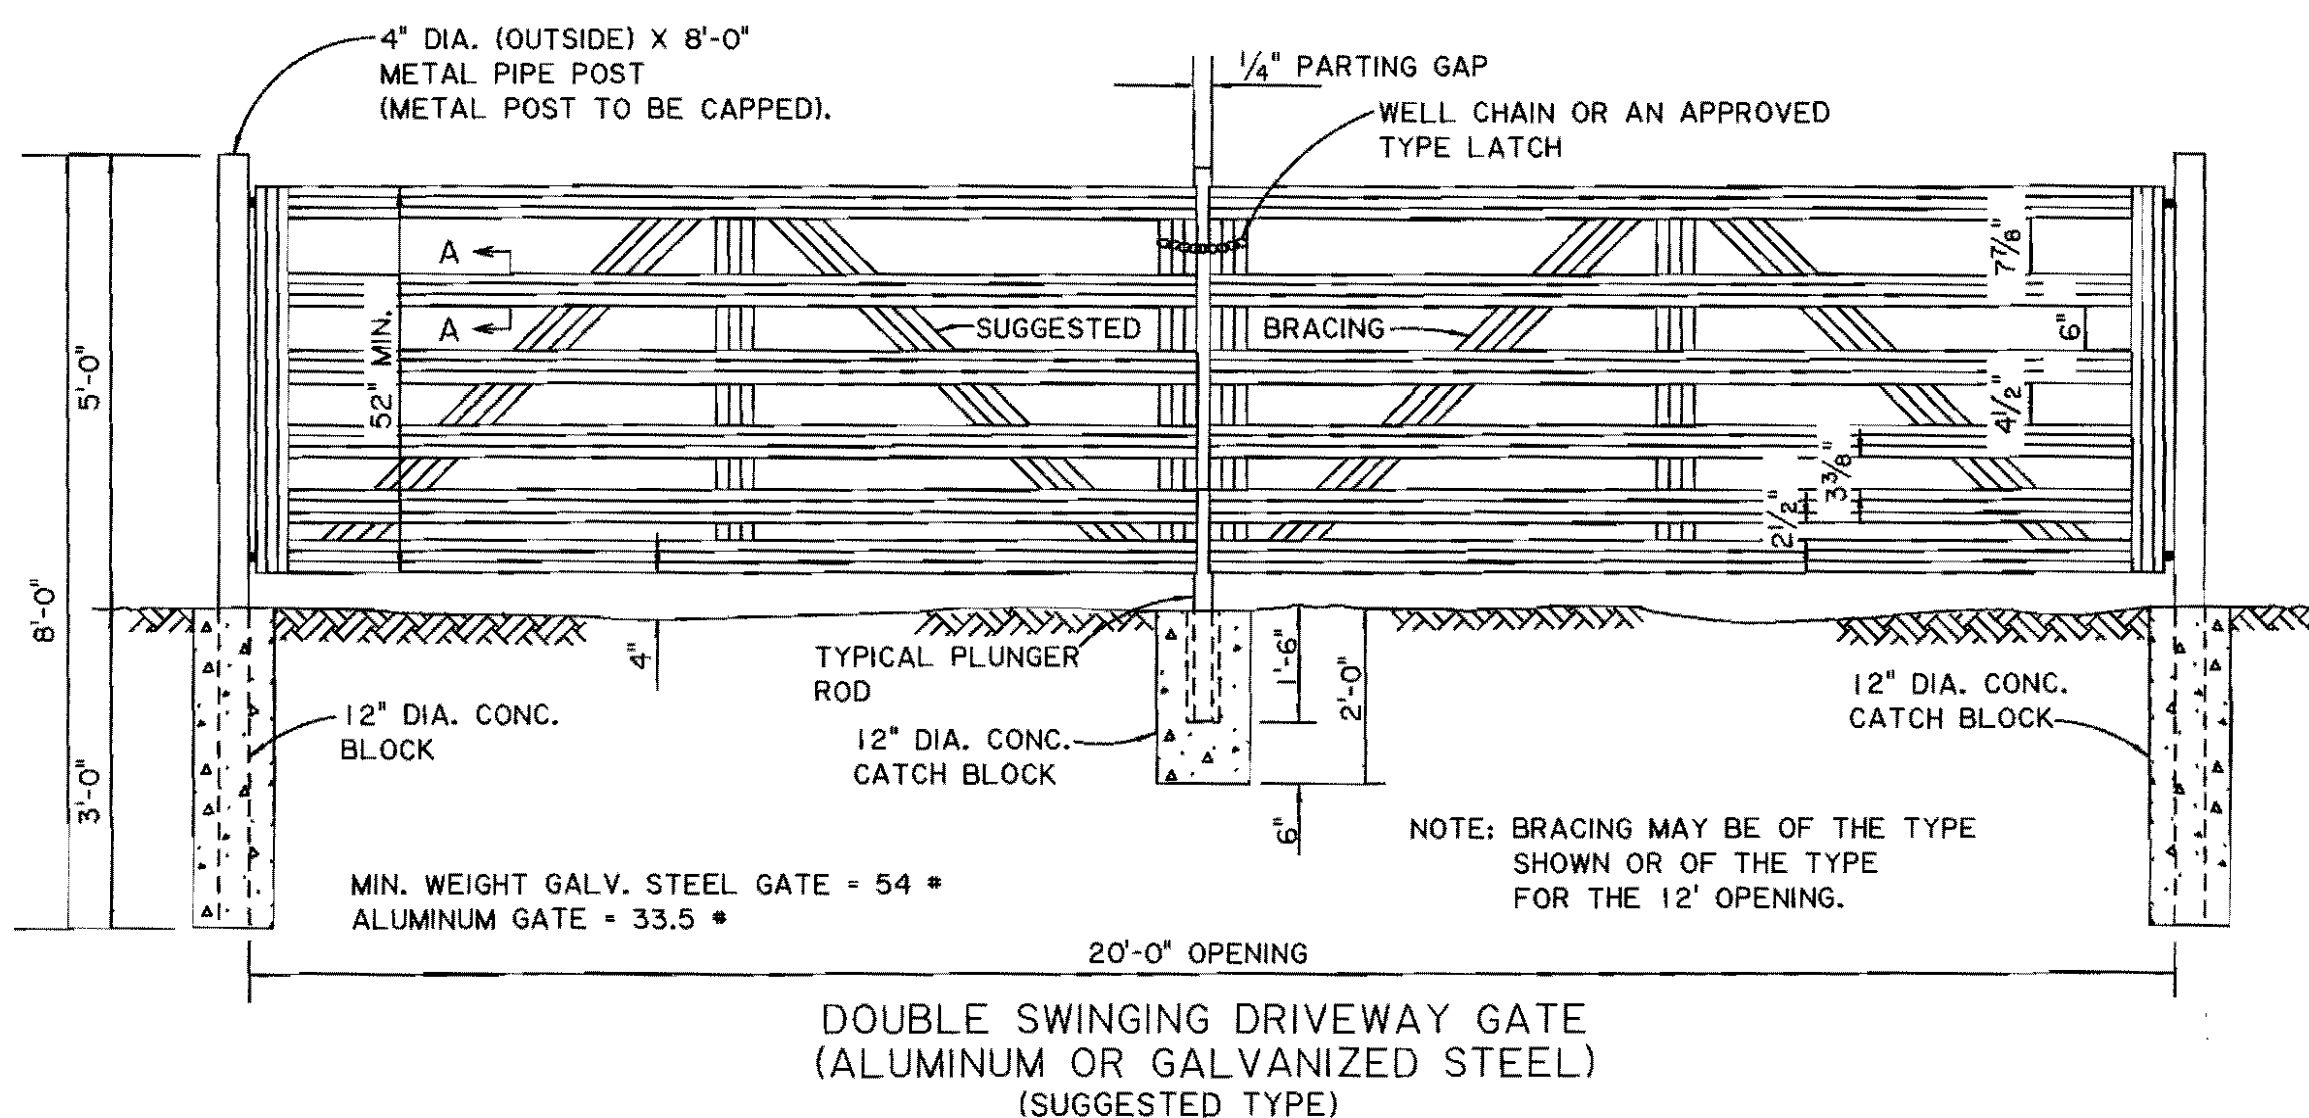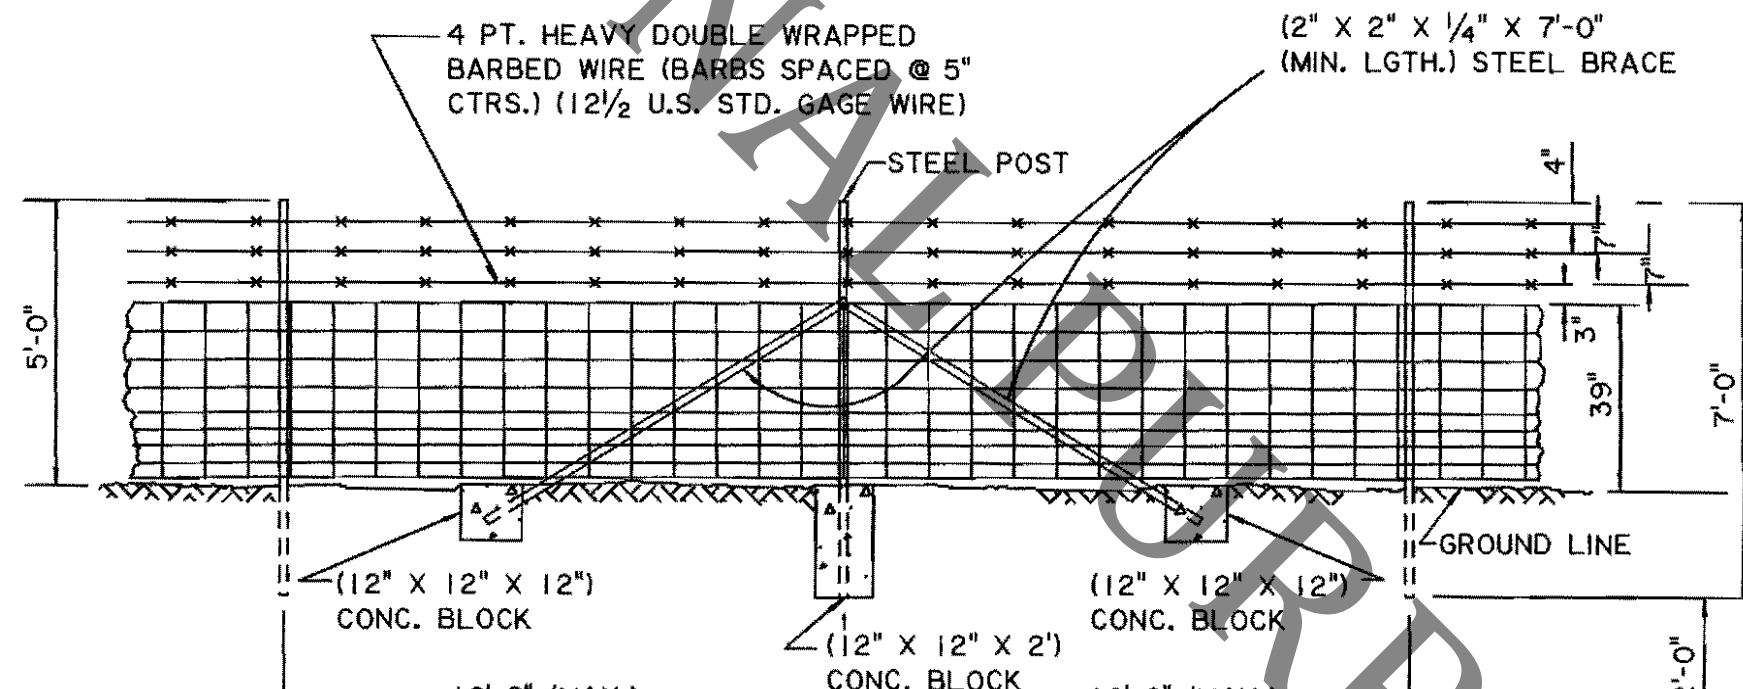

TYPICAL BRACING AT GATE POST *

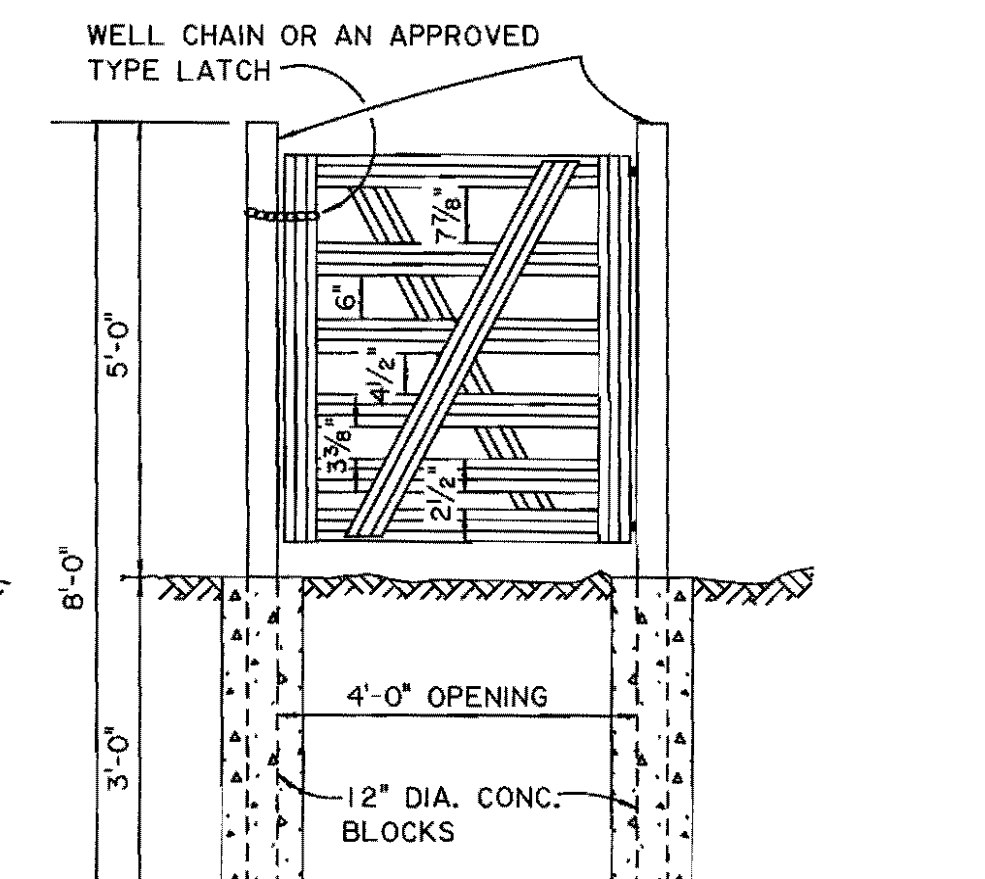

SINGLE SWINGING WALKGATE (ALUMINUM OR GALVANIZED STEEL) (SUGGESTED TYPE)