

LOCATIONS > 1600' AWAY FROM INTERSECTION

Pilot Car Turnaround

LANE CLOSED
R11-2
48 IN X 30 IN

Pilot Car Turnaround

W20-7
48 IN X 48 IN

SPEED LIMIT
XX
W3-5
48 IN X 48 IN

ONE LANE ROAD AHEAD
W20-4
48 IN X 48 IN

SPEED LIMIT
XX
W3-5
48 IN X 48 IN

SPEED LIMIT
XX
R2-1
24 IN X 30 IN

ONE LANE ROAD AHEAD
W20-4
48 IN X 48 IN

SPEED LIMIT
XX
W3-5
48 IN X 48 IN

MIN Buffer Space
See TTC-00(C)

Work Space

Pilot Car Turnaround

* Any sign of the W20-4 series may be used.

SPEED LIMIT (prior to construction)	SPACING			
	A	B	C	D
≤ 40 mph	500 FT	100 FT	N/A	12
45-50 mph	1000 FT	350 FT	500 FT	35
> 55 mph	1500 FT	500 FT	800 FT	50

This sheet shall be used with the Temporary Traffic Control General Notes Sheets TTC-00(A), TTC-00(B), TTC-00(C), TTC-00(D), and other Temporary Traffic Control Sheets as appropriate.

2) To prevent vehicles from entering the work area against the flow of traffic, an additional flagger shall be stationed at each intersection, major driveway, railroad crossing, or crossing within the work area.

A) 2.5 miles for $ADT < 2,500$.
B) 2.0 miles for $2,500 < ADT < 5,000$.
C) 1.5 miles for $ADT > 5,000$.

5) Visual or radio contact shall be required between flaggers at all times. The flagger shall be visible from the flagger sign.

7) If a pilot car is required then the contractor is not required to have channelizing devices in the tangent section.


8) If work zone is less than 1600 feet from an intersection see TTC-03.

9) If used, a pilot car shall guide a queue of vehicles through the work zone or diversion.

11) The operation of the pilot vehicle shall be coordinated with flagging operations or other controls at each end of the one-lane section and all major driveways and street intersections.

12) The pilot car sign should be mounted 7 feet above roadway in a position visible to oncoming and following traffic.

14) The sign mounted on the vehicle shall be two-sided.

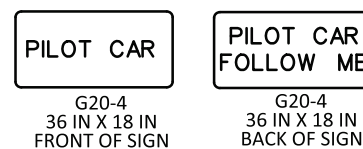

SPEED LIMIT (prior to construction)	SPACING			
	A	B	C	D
≤ 40 mph	500 FT	100 FT	N/A	125 FT
45-50 mph	1000 FT	350 FT	500 FT	350 FT
≥ 55 mph	1500 FT	500 FT	800 FT	500 FT

- Traffic Sign
- Flagger
- Channelizing Devices
- Type III Barricades
- Work Area
- Type B Light
- Direction of Travel
- Truck with Green/Amber Light and TMA

ALL TTC STANDARDS SHOW MINIMUM CONSTRUCTION SIGNING.
ALL SITUATIONS SHALL BE REVIEWED AND/OR DESIGNED BY THE ENGINEER.
CONTRACTORS ARE RESPONSIBLE FOR COMPLYING WITH ALL TTC STANDARDS.