

DOTD FORM: 24-102


PROPOSAL TO PROVIDE CONSULTANT SERVICES


(Revised March 1, 2022)

Prime consultant shall complete the DOTD Form 24-102 without altering the Form's text; however, the instruction and/or guidance for Sections 12 through 23 can be removed but do not remove Section title and number.

ANY CONSULTANT FAILING TO SUBMIT ANY OF THE INFORMATION REQUIRED ON THE DOTD FORM 24-102, OR PROVIDING INACCURATE INFORMATION ON THE DOTD FORM 24-102, MAY BE CONSIDERED NON-RESPONSIVE.

Prime consultant should enter the firm name in the footer at the bottom of this page. (It will carry over to subsequent pages.)

1. Contract title as shown in the advertisement	MARTIN LAKE OVER DRAINAGE CANAL
2. Contract number(s) as shown in the advertisement	4400025191
3. State Project Number(s), if shown in the advertisement	H.015051.5
4. Prime consultant name (as registered with the Louisiana Secretary of State where such registration is required by law)	TriCoeur Services, L.L.C.  (Louisiana charter number 40282112K)
5. Prime consultant license number (as registered with the Louisiana Professional Engineering and Land Surveying Board (LAPELS) if registration is required under Louisiana law)	EF#: 4660 VF#: 0653
6. Prime consultant mailing address	9270 Siegen Lane, Suite 501, Baton Rouge, LA 70810
7. Prime consultant physical address (existing or to be established, if location is used as an evaluation criteria)	9270 Siegen Lane, Suite 501, Baton Rouge, LA 70810
8. Name, title, phone number, and email address of prime consultant's contract point of contact	Barry P. Gahagan, PE, PLS; Projects Principal Phone: 225-266-7507 E-Mail: BGahagan@TriCoeur.com
9. Name, title, phone number, and email address of the official with signing authority for this proposal	Aileen Foley, Managing Principal Phone: 225-228-2681 Email: AFoley@TriCoeur.com

<p>10. This is to certify that all information contained herein is accurate and true, and that the team presently has sufficient staff to perform these services within the designated time frame. By submitting this proposal, proposer certifies that it is not engaged in a boycott of Israel and it will, for the duration of its contract obligations, refrain from a boycott of Israel. Proposer also certifies and agrees that the following information is correct: In preparing its response, the proposer has considered all proposals submitted from qualified, potential subcontractors and suppliers, and has not, in the solicitation, selection, or commercial treatment of any subcontractor or supplier, refused to transact or terminated business activities, or taken other actions intended to limit commercial relations, with a person or entity that is engaging in commercial transactions in Israel or Israeli-controlled territories, with the specific intent to accomplish a boycott or divestment of Israel. The proposer also has not retaliated against any person or other entity for reporting such refusal, termination, or commercially limiting actions. DOTD reserves the right to reject the response of the bidder or proposer if this certification is subsequently determined to be false, and to terminate any contract awarded based on such a false response.</p>	<p>Signature (shall be the same person as #9):</p> <p></p> <p>Date: January 17, 2023</p>						
<p>11. If a Disadvantaged Business Enterprise (DBE) goal has been set for this advertisement, indicate which firm(s) will be used to meet the DBE goal and each firm(s)' percentage.</p>	<table border="0"> <tr> <td><u>Firm(s):</u></td> <td><u>Firm(s)'</u></td> </tr> <tr> <td><u>%:</u></td> <td></td> </tr> <tr> <td>N/A</td> <td></td> </tr> </table>	<u>Firm(s):</u>	<u>Firm(s)'</u>	<u>%:</u>		N/A	
<u>Firm(s):</u>	<u>Firm(s)'</u>						
<u>%:</u>							
N/A							

12. Past Performance Evaluation Discipline Table:

As indicated in the advertisement, insert the completed table here. The percentages for the prime and sub-consultants must total 100% for **each past performance evaluation discipline**, as well as the overall total percent of the contract.


Sub-consultants are allowed to be used for this proposal. Fill in the table by identifying only those evaluation disciplines consistent with the approach and methodology proposed in Section 18 of the DOTD Form 24-102*, the name of each firm that is part of the proposal, and the percentage of work in each past performance evaluation discipline to be performed by that firm. The percentage estimated for each evaluation discipline is for evaluation purposes only and will not control the actual performance or payment of the work. The percentages for prime and sub-consultants must total 100% for each past performance evaluation discipline, as well as the overall total percentage of the contract.

Evaluation Disciplines	% of Overall Contract	Prime TriCoeur Services, LLC	Firm B Landsource, Inc.	Firm C ECS SOUTHEAST, LLP	Each Discipline must total to 100%
Survey	28.1%	10%	90%	0%	100%
Bridge	63.3%	100%	0%	0%	100%
Environmental	8.6%	4%	0%	96%	100%
Identify the percentage of work for the overall contract to be performed by the prime consultant and each sub-consultant					
Percent of Contract	100%	66.4%	25.3%	8.3%	


13. Firm Size:

For all firms that are part of this team, indicate the approximate number of personnel to be committed to this contract, by DOTD Job Classification and the total number of personnel within the firm that could provide support, if needed. If a specialized job classification is required and not included on the DOTD job classification list, specify "Other (xxxx)" and include the classification title inside the parentheses. The DOTD Job Classification(s) to be used can be found at the following link:

http://wwwsp.dotd.la.gov/Inside_LaDOTD/Divisions/Engineering/CCS/Job_Qualification/Job%20Classifications%20with%20Descriptions.pdf

Firm name	DOTD Job Classification	Number of personnel committed to this contract	Total number of personnel available in this DOTD Job Classification (if needed)
	Administrative	1	1
	Principal	1	1
	Engineer	2	2
	CADD Technician	1	1
	Engineer - Intern	1	1
LandSource, Inc.	Surveyor	1	2
	CADD Technician	1	4
	Clerical	1	2
	Instrument Man	1	4
	Party Chief	1	4
ECS SOUTHEAST, LLP	Principal		5
	Designer		10
	Supervisor Engineer		10
	Engineer		25
	Engineering-Aide		10
	Other (Field and Drilling Staff)	3	10
	Other (Laboratory Staff)		5

14. Organizational Chart:

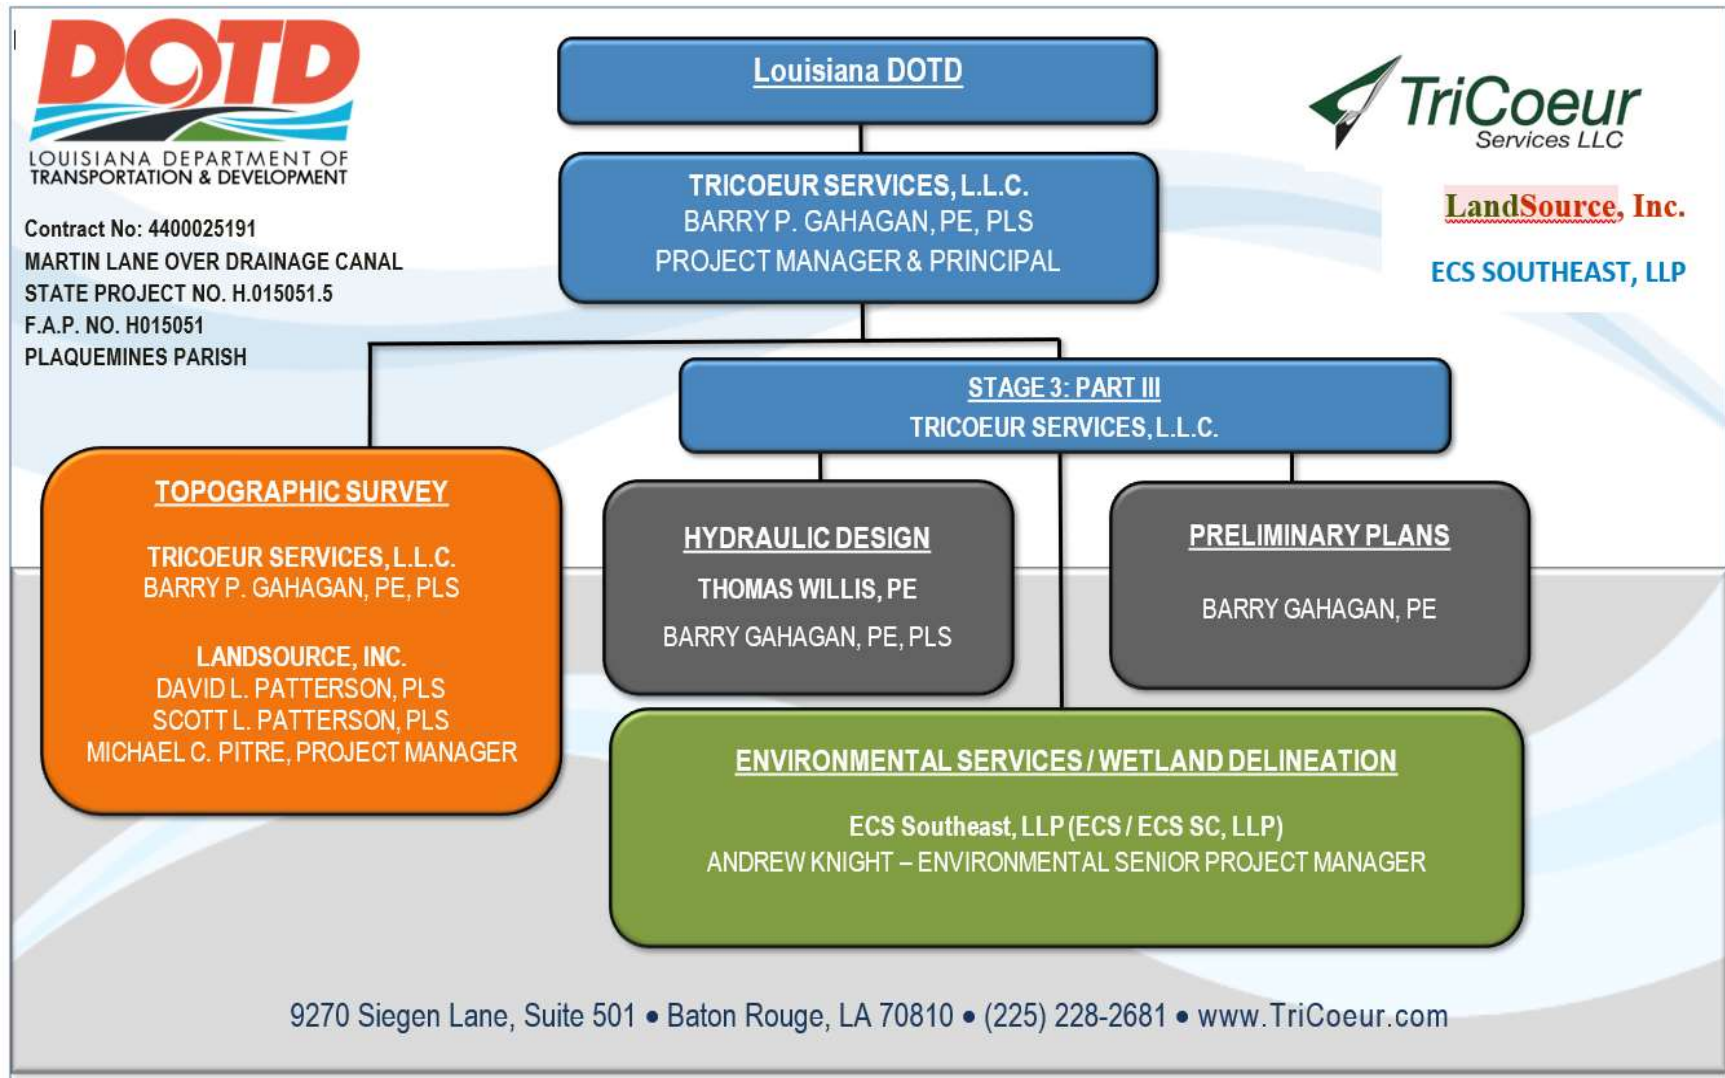


15. Minimum Personnel Requirements:

Use the table below to identify both prime consultant and sub-consultant staff designated to work on this contract meeting the Minimum Personnel Requirements (MPRs) specified in the advertisement. Ensure the résumé reflects the required experience stated in the MPR.

MPR No. Do not insert wording from ad	Personnel being used to meet the MPR (Individual(s) may not satisfy more than one MPR unless specifically allowed by Attachment B of the advertisement)	Firm employed by	Type of license / certification & number	State of license	License / certification expiration date
1	Barry P Gahagan, PE		PE /Civil 21586	LA	3/31/2024
2	Barry P Gahagan, PE		PE /Civil 21586	LA	3/31/2024
3	Barry P Gahagan, PE		PE /Civil 21586	LA	3/31/2024
4	David L. Patterson, PLS	LandSource, Inc.	PLS.0004784	LA	3/31/2023
4	Scott L Patterson, PLS		PLS.0005246	LA	9/30/2023
5	Andrew Knight	ECS SOUTHEAST, LLP	N/A	N/A	N/A

16. Staff Experience:

Résumés shall be provided for all prime and sub-consultant personnel listed in Sections 14 and/or 15 of the proposal. Résumés of personnel not identified in Section 14 or Section 15 of the proposal should not be included and will not be evaluated. Résumés should be limited to 2 pages per person. Any certificates required by the advertisement are to be placed in Section 20.

Firm employed by TriCoeur Services, L.L.C.					
Name	Barry P Gahagan, P.E., P.L.S.			Years of relevant experience with this employer	12
Title	Projects Principal			Years of relevant experience with other employer(s)	31
Degree(s) / Years / Specialization				Bachelor of Science/ 1980 / Civil Engineering LSU Master of Science / 1990 / Civil (Structural) Engineering LSU	
Active registration number / state / expiration date				PE LA 21586, PLS 4834 / Louisiana / 3/31/2024	
Year registered	1985 1997	Discipline	Civil Engineering Land Surveying		
Contract role(s) / brief description of responsibilities			Project Manager		
Experience dates	Experience and qualifications relevant to the proposed contract; <i>i.e.</i> , “designed drainage”, “designed girders”, “designed intersection”, etc. Experience dates should cover the time specified in the applicable MPR(s).				
12/18 – 07/20	SP No. H013122.5 OSB Ouachita Parish (Pine Street over West Prong of Young’s Bayou & Harrison – Collier Streets over Concrete Drainage Canal) TS & PP Project Manager/ directed topographic survey/ designed horizontal and vertical geometrics for approach roadways and bridge span configuration/ coordinated drainage design/ reviewed plan preparation of two multiple RCB crossings in place of existing bridge structures along existing skewed alignments in FEMA floodways.				
12/18 – 03/20	SP No. H013098.5 OSB Vernon Parish (Jim Cryer Rd. over Bayou Anacoco) TS & PP Project Manager/ directed topographic survey/ designed horizontal and vertical geometrics for approach roadways and bridge span configuration/ developed structure type size and location recommendation/ reviewed plan preparation of a 5 span LG25 crossing along offset alignment to enabling Parish’s request to through travel during construction. Recommended (5) 48ft spans in lieu of (6) 40ft spans to improve debris passage and gain economics advantage by elimination of one intermediate bent.				
09/13 – 03/17	SP No. H010597.5 OSB West Feliciana Parish (Sligo Road Bridges) TS, PP & FP Project Manager/ directed topographic survey/ designed horizontal and vertical geometrics along extremely hilly terrain for approach roadways and bridge span configuration/ developed structure type size and location recommendations/ prepared graphical grades/ ROW taking sketches and reviewed plan preparation for the skewed 12 span Quad Beam crossing of Bayou Sara and the 3 span crossing of Gayle’s Creek. Site construction sequencing to maintain access to landowners between sites.				

04/13 - 04/16	SP No. H010040.5 OSB Morehouse Parish (Bud Road & Bonne Idee Road Bridges) TS, PP & FP Project Manager/ designed horizontal and vertical geometrics for approach roadways and bridge span configuration/ developed structure type size and location recommendation/ ROW taking sketches and reviewed plan preparation for skewed /re-aligned/ curved and super-elevated slab span crossings. Prepared cantilevered sheetpile wall system design to minimize wetland encroachment.
05/13 - 01/14	East Baton Rouge City Parish Project No. 12-BR-US-018 (East Brookstown Bridge over Hurricane Bayou, Bridge Replacement) TS, PP & FP Project Manager/ designed horizontal and vertical geometrics for approach roadways and bridge span configuration/ developed structure type size and location recommendation/ and reviewed plan preparation for slab span crossings over concrete lined channel and along challenging utility corridor including shallow, large diameter sewer force main and maintained pedestrian access.
02/19 - 03/20	East Feliciana Parish Project No. PW1178-DR 4277 LA (FEMA) (Carruth Road Bridge) TS, PP & FP Project Manager/ directed topographic survey/ designed horizontal and vertical geometrics along narrow flood prone corridor for approach roadways and bridge span configuration/ developed structure type size and location recommendation and reviewed plan preparation for a multi span LG25 crossing as a cost saving alternative to “in kind” timber bridge crossing of the Lateral and Comite Creek Relief structure north of Clinton, LA.
02/19 - 04/20	East Feliciana Parish Project No. PW1190-DR 4277 LA (FEMA) (John Thomas Lane Bridge) TS, PP & FP Project Manager/ directed topographic survey/ designed horizontal and vertical geometrics along narrow flood prone corridor for approach roadways and bridge span configuration/ ROW taking sketches /developed structure alternative span recommendation and reviewed plan preparation for a multi concrete slab crossing as a cost saving alternative to “in kind” timber bridge crossing of the Waterfall Bayou structure south of Clinton, LA.
02/17 - 02/18	West Feliciana Parish Project No. 16-HMP-PW-02 (FEMA) (Plettenberg Road Bridge) TS, PP & FP Project Manager/ directed topographic survey/ designed horizontal and vertical geometrics along sharply curved alignment in extremely flood prone corridor for approach roadways and bridge span configuration/ prepared ROW taking sketches /developed structure alternative span recommendation of three central quad beam spans and curved end slab spans/ reviewed plan preparation for the Polly Creek crossing replacement structure in the seasonally flood prone areas from the Mississippi River batture north of St Francisville, LA.
02/11 - 02/13	Jefferson Parish Project No. DPW-97-046B-DR(SELA) (WB West Metairie Ave over Soniat Canal) PP & FP Project Manager/ directed topographic survey/ designed horizontal and vertical geometrics along curved alignment requiring split phase construction, channel paving, approach surcharge loading and designed superstructure and substructure including segmental spliced precast pile construction below high tower electrical transmission lines. This project alternative was conceived following realization of constructability issues at the confluence of pumped drainage canals at the upstream terminus of USACE/SELA flood improvement project. .

Firm employed by TriCoeur Services, L.L.C.			
Name	Thomas M. Willis, P.E.		Years of relevant experience with this employer
Title	Project Engineer (Hydr & Env)		Years of relevant experience with other employer(s)
Degree(s) / Years / Specialization	BS/ 1981/ Civil Engineering		
Active registration number / state / expiration date	24205 / LA Expiration: 3/31/2024		
Year registered	1991	Discipline	Civil (Hydraulic) & Environmental Engineering
Contract role(s) / brief description of responsibilities	Project Engineer Civil (Hydraulic) & Environmental		
Experience dates	Experience and qualifications relevant to the proposed contract; <i>i.e.</i> , “designed drainage”, “designed girders”, “designed intersection”, etc. Experience dates should cover the time specified in the applicable MPR(s).		
12/18 – 07/20	SP No. H013122.5 OSB Ouachita Parish (Pine Street over West Prong of Young’s Bayou & Harrison – Collier Streets over Concrete Drainage Canal) HYDR Project Engineer/ Prepared hydraulic analyses reports/ calibrated results to conform to FEMA data in undocumented pump drainage network of Monroe, LA./ confirmed sufficiency of Parish preferred multiple RCB bridge replacements along existing skewed alignments in FEMA floodways.		
12/18 – 03/20	SP No. H013098.5 OSB Vernon Parish (Jim Cryer Rd. over Bayou Anacoco) HYDR Project Engineer/ Prepared hydraulic analyses report for bridge span configuration developed structure type size and location recommendation/ reviewed plan preparation of a 5 span LG25 crossing along offset alignment in woody debris prone regions downstream of the Anacoco Lake dam.		
09/13 – 03/17	SP No. H010597.5 OSB West Feliciana Parish (Sligo Road Bridges) HYDR Project Engineer/ Prepared hydraulic analyses reports for two bridge sites along extremely hilly terrain/flashy streams for Quad Beam bridge spans for the skewed 12 span crossing of Bayou Sara and the 3 span crossing of Gayle’s Creek.		
02/19 - 03/20	East Feliciana Parish Project No. PW1178-DR 4277 LA (FEMA) (Carruth Road Bridge) HYDR Project Engineer/ Prepared hydraulic analyses reports for narrow flood prone corridor for roadway crossing at the confluence of a drainage lateral and significant primary channel relief along the existing bridge upstream face. Developed hydraulic studies inclusive of 20ft timber and 48ft LG25 girder spans. The recommendation and reviewed plan preparation for a multi span LG25 crossing proved low cost in bid as a cost saving alternative to “in kind” timber bridge crossing of the Lateral and Comite Creek Relief structure north of Clinton, LA.		
02/19 - 04/20	East Feliciana Parish Project No. PW1190-DR 4277 LA (FEMA) (John Thomas Lane Bridge) HYDR Project Engineer/ Prepared hydraulic analyses reports for flood prone roadway crossing in flood prone corridor for a multi concrete slab crossing of Waterfall Bayou structure south of Clinton, LA.		
02/17 - 02/18	West Feliciana Parish Project No. 16-HMP-PW-02 (FEMA) (Plettenberg Road Bridge) HYDR Project Engineer/ Prepared hydraulic analyses reports for alignment in extremely flood prone corridor for the Polly Creek crossing replacement structure in the seasonally flood prone areas of the Mississippi River batture north of St Francisville, LA.		

Firm employed by LandSource, Inc.				
Name	David L. Patterson		Years of relevant experience with this employer	26
Title	President		Years of relevant experience with other employer(s)	10
Degree(s) / Years / Specialization			Louisiana State University, B.S., 4 yr., Construction Technology	
Active registration number / state / expiration date			License No.: 4784 / LA / 3/31/2023	
Year registered	1996	Discipline	Professional Land Surveyor	
Contract role(s) / brief description of responsibilities			Principal-in-Charge/Project Manager/Land Surveyor - Mr. Patterson has & will serve as Principal-in-Charge, Project Manager & Professional Land Surveyor on the projects listed below and the advertised project. He will oversee all project activities.	
Experience dates (mm/yy–mm/yy)	Experience and qualifications relevant to the proposed contract; <i>i.e.</i> , “designed drainage”, “designed girders”, “designed intersection”, etc. Experience dates should cover the time specified in the applicable MPR(s).			
2021	S.P. No. H.014318 Site 1, Off-System Highway Bridge Program, East Baton Rouge Parish. Responsibilities included topographic survey to replace one bridge. (2021)			
2021	S.P. No. H.014318 Site 2, Off-System Highway Bridge Program, Rapides Parish. Responsibilities included topographic survey to replace two bridges. (2021)			
2020	S.P. No. H.014223, Off-System Highway Bridge Program, Vermillion Parish. Responsibilities included topographic survey to replace one bridge. (2020)			
2020	S.P. No. H.014261, Off-System Highway Bridge Program, Rapides Parish. Responsibilities included topographic survey to replace two bridges. (2020)			
2018-2019	S.P. No. H.013122.5, Off-System Highway Bridge Program, Ouachita Parish. Responsibilities included topographic surveys to replace two (Pine Street and Harrison Collier) bridges in Monroe, LA. (2018)			
2019	S.P. No. H.013098.5, Off-System Highway Bridge Program, Vernon Parish. Responsibilities included topographic survey to replace the existing Jim Cryer Road bridge over Bayou Anacoco bridge. (2019)			
2013	S.P. No. H.010040.5, Off-System Highway Bridge Program, Morehouse Parish. Responsibilities included topographic surveys to replace two (Bud Road and Bayou Bonne Idee) bridges. (2013)			
2013	S.P. No. H.010061.5 & H.010062.5, Off-System Highway Bridge Program, Tangipahoa Parish. Responsibilities included topographic survey to replace four bridges. (2013)			

Firm employed by LandSource, Inc.				
Name	Scott L. Patterson		Years of relevant experience with this employer	10
Title	Project Manager / Land Surveyor		Years of relevant experience with other employer(s)	3
Degree(s) / Years / Specialization			Louisiana State University, B.S., 4 yr., Construction Technology	
Active registration number / state / expiration date			License No.: 5246 / LA / 9/30/2023	
Year registered	2022	Discipline	Professional Land Surveyor	
Contract role(s) / brief description of responsibilities			Project Manager	
Experience dates (mm/yy–mm/yy)	Experience and qualifications relevant to the proposed contract; <i>i.e.</i> , “designed drainage”, “designed girders”, “designed intersection”, etc. Experience dates should cover the time specified in the applicable MPR(s).			
2021	S.P. No. H.014318 Site 1, Off-System Highway Bridge Program, East Baton Rouge Parish. Responsibilities included topographic survey to replace one bridge. (2021)			
2021	S.P. No. H.014318 Site 2, Off-System Highway Bridge Program, Rapides Parish. Responsibilities included topographic survey to replace two bridges. (2021)			
2020	S.P. No. H.014223, Off-System Highway Bridge Program, Vermillion Parish. Responsibilities included topographic survey to replace one bridge. (2020)			
2020	S.P. No. H.014261, Off-System Highway Bridge Program, Rapides Parish. Responsibilities included topographic survey to replace two bridges. (2020)			
2018-2019	S.P. No. H.013122.5, Off-System Highway Bridge Program, Ouachita Parish. Responsibilities included topographic surveys to replace two (Pine Street and Harrison Collier) bridges in Monroe, LA. (2018)			
2019	S.P. No. H.013098.5, Off-System Highway Bridge Program, Vernon Parish. Responsibilities included topographic survey to replace the existing Jim Cryer Road bridge over Bayou Anacoco bridge. (2019)			
2013	S.P. No. H.010040.5, Off-System Highway Bridge Program, Morehouse Parish. Responsibilities included topographic surveys to replace two (Bud Road and Bayou Bonne Idee) bridges. (2013)			
2013	S.P. No. H.010061.5 & H.010062.5, Off-System Highway Bridge Program, Tangipahoa Parish. Responsibilities included topographic survey to replace four bridges. (2013)			

Firm employed by LandSource, Inc.			
Name	Michael C. Pitre		Years of relevant experience with this employer
Title	Vice President		Years of relevant experience with other employer(s)
Degree(s) / Years / Specialization		T.H. Harris Technical College, Associates Degree, 2 yr., Civil Engineering Technology	
Active registration number / state / expiration date		License No.: CST Level III Certified / LA License #1003-1863	
Year registered		Discipline	Survey Coordinator
Contract role(s) / brief description of responsibilities		Survey Coordinator - Mr. Pitre has & will serve as Survey Coordinator on the projects listed below and the advertised project. He will coordinate survey crews and CADD personnel.	
Experience dates (mm/yy-mm/yy)	Experience and qualifications relevant to the proposed contract; <i>i.e.</i> , “designed drainage”, “designed girders”, “designed intersection”, etc. Experience dates should cover the time specified in the applicable MPR(s).		
2021	S.P. No. H.014318 Site 1, Off-System Highway Bridge Program, East Baton Rouge Parish. Responsibilities included topographic survey to replace one bridge. (2021)		
2021	S.P. No. H.014318 Site 2, Off-System Highway Bridge Program, Rapides Parish. Responsibilities included topographic survey to replace two bridges. (2021)		
2020	S.P. No. H.014223, Off-System Highway Bridge Program, Vermillion Parish. Responsibilities included topographic survey to replace one bridge. (2020)		
2020	S.P. No. H.014261, Off-System Highway Bridge Program, Rapides Parish. Responsibilities included topographic survey to replace two bridges. (2020)		
2018-2019	S.P. No. H.013122.5, Off-System Highway Bridge Program, Ouachita Parish. Responsibilities included topographic survey management to replace (Pine Street and Harrison Collier) bridges in Monroe, LA. (2018)		
2019	S.P. No. H.013098.5, Off-System Highway Bridge Program, Vernon Parish. Responsibilities included topographic survey management to replace the Jim Cryer Road bridge over Bayou Anacoco bridge. (2019)		
2013	S.P. No. H.010040.5, Off-System Highway Bridge Program, Morehouse Parish. Responsibilities included project management for topographic surveys to replace two (Bud Road and Bayou Bonne Idee) bridges. (2013)		
2013	S.P. No. H.010061.5 & H.010062.5, Off-System Highway Bridge Program, Tangipahoa Parish. Responsibilities included topographic survey to replace four bridges. (2013)		

Firm employed by ECS SOUTHEAST, LLP			
Name	Andrew Knight	Years of relevant experience with this employer	3.5
Title	Environmental Senior Project Manager	Years of relevant experience with other employer(s)	17
Degree(s) / Years / Specialization	B.S. – Wildlife / 2006		
Active registration number / state / expiration date	N/A		
Year registered	N/A	Discipline	N/A
Contract role / brief description of responsibilities	MPR 5 Mr. Knight is an Environmental Senior Project Manager for ECS with 17 years of experience in the environmental field. He has a wetland scientist and wildlife biologist background focusing on the natural resource and regulatory needs of clients.		
06/2021 – 06/2022	Sunlight Road Solar Project, Franklinton, LA: ECS performed Phase I ESA, Phase II ESA, T&E species assessment, wetland delineation(s), JD acquisition from Corps, Department of the Army permitting, general consulting, and Washington Parish special use permitting for a proposed utility scale solar project. Role: Wetlands and Natural Resources.		
02/2022 – Present	Vacherie Solar Energy Center Project, Vacherie, LA: ECS is responsible for natural and cultural resource services, specifically, wetland delineation(s), JD acquisition from the Corps, T&E species assessment, LA Department of Natural Resources (LDNR) permitting, cultural resource compliance, and Department of the Army (DA) permitting. Role: Wetlands and Natural Resources.		
06/2020 – 06/2022	Elizabeth Solar Project, Sugartown, LA: ECS performed Phase I ESA, T&E species assessment, wetland delineation(s), JD acquisition from Corps, general consulting, and other non-natural resource services for a proposed utility scale solar project. Role: Wetlands and Natural Resources.		
02/2021 – Present	SJ Louisiana Solar Project, Vacherie, LA ECS is responsible for natural and cultural resource services, specifically, wetland delineation(s), JD acquisition from the Corps, T&E species assessment, LA Department of Natural Resources (LDNR) permitting, cultural resource compliance, and Department of the Army (DA) permitting. Role: Wetlands and Natural Resources.		

17. Firm Experience:

Firm name	TriCoeur Services, L.L.C.	Past Performance Evaluation Discipline(s)*	Bridge
Project name	Sligo Road Bridges	Firm responsibility (prime or sub?)	Prime
Project number	S.P. No. H.010597.5	Owner's name	Louisiana DOTD
Project location	West Feliciana Parish, LA	Owner's Project Manager	Barbara Ostuno, PE
Owner's address, phone, email	1201 Capital Access Road, (225) 379-1047, B.Ostuno @LA.GOV		
Services commenced by this firm (mm/yy)	09/13	Total consultant contract cost (\$1,000's)	155.948
Services completed by this firm (mm/yy)	01/22	Cost of consultant services provided by this firm (\$1,000's)	155,948
Prepared Preliminary and Final bridge replacement plans for rural local roadways/ designed horizontal and vertical geometrics along extremely hilly terrain for approach roadways and bridge span configuration/ developed structure type size and location recommendations/ prepared graphical grades/ ROW taking sketches and reviewed plan preparation for the skewed 12 span Quad Beam crossing of Bayou Sara and the 3 span crossing of Gayle's Creek. Site construction sequencing to maintain access to landowners between sites. All current members of the TriCoeur staff were involved in this project and 100% performed in Louisiana.			
Firm name	TriCoeur Services, L.L.C.	Past Performance Evaluation Discipline(s)*	Bridge
Project name	Bud Road and Bonne Idee Road Bridges	Firm responsibility (prime or sub?)	Prime
Project number	S.P. No. H.010040.5	Owner's name	Louisiana DOTD
Project location	Morehouse Parish, LA	Owner's Project Manager	Barbara Ostuno, PE
Owner's address, phone, email	1201 Capital Access Road, (225) 379-1047, B.Ostuno @LA.GOV		
Services commenced by this firm (mm/yy)	04/13	Total consultant contract cost (\$1,000's)	116.113
Services completed by this firm (mm/yy)	11/15	Cost of consultant services provided by this firm (\$1,000's)	96.639
Prepared Preliminary and Final bridge replacement plans for rural local roadways / ROW taking sketches for skewed /re-aligned/ curved and super-elevated slab span crossings. Prepared cantilevered sheetpile wall system design to minimize wetland encroachment. All current members of the TriCoeur staff were involved in this project and 100% performed in Louisiana.			

Firm name	TriCoeur Services, L.L.C.	Past Performance Evaluation Discipline(s)*	Bridge
Project name	Pine Street over West Prong of Young's Bayou & Harrison – Collier Streets over Concrete Drainage Canal	Firm responsibility (prime or sub?)	Prime
Project number	S.P. No. H013122.5	Owner's name	Louisiana DOTD
Project location	Ouachita Parish, LA	Owner's Project Manager	Barbara Ostuno, PE
Owner's address, phone, email	1201 Capital Access Road, (225) 379-1047, Barbara.Ostuno@LA.GOV		
Services commenced by this firm (mm/yy)	12/18	Total consultant contract cost (\$1,000's)	110.664
Services completed by this firm (mm/yy)	05/21	Cost of consultant services provided by this firm (\$1,000's)	102.996
Prepared Preliminary bridge replacement plans for urban local roadways, determined and implemented practical application as desired by City Parish representatives of multiple RCB crossings in place of existing bridge structures along existing skewed alignments in FEMA floodways. All current members of the TriCoeur staff were involved in this project and 100% performed in Louisiana.			
Firm name	TriCoeur Services, L.L.C.	Past Performance Evaluation Discipline(s)*	Bridge
Project name	Jim Cryer Rd. over Bayou Anacoco	Firm responsibility (prime or sub?)	Prime
Project number	S.P. No. H013098.5	Owner's name	Louisiana DOTD
Project location	Vernon Parish, LA	Owner's Project Manager	Barbara Ostuno, PE
Owner's address, phone, email	1201 Capital Access Road, (225) 379-1047, Barbara.Ostuno@LA.GOV		
Services commenced by this firm (mm/yy)	11/18	Total consultant contract cost (\$1,000's)	79.692
Services completed by this firm (mm/yy)	10/22	Cost of consultant services provided by this firm (\$1,000's)	42.778
Prepared Preliminary bridge replacement plans for rural local roadway, determined and location recommendation/ reviewed plan preparation of a 5 span LG25 crossing along offset alignment to enabling Parish's request to maintain travelway during construction. Recommended (5) 48ft spans in lieu of (6) 40ft spans to improve debris passage and gain economics advantage by elimination of one intermediate bent. All current members of the TriCoeur staff were involved in this project and 100% performed in Louisiana.			
Firm name	TriCoeur Services, L.L.C.	Past Performance Evaluation Discipline(s)*	Bridge
Project name	Poplar Street Bridge over Bonnabel Canal	Firm responsibility (prime or sub?)	Prime
Project number	S.P. No. H006138.5	Owner's name	Louisiana DOTD
Project location	Jefferson Parish, LA	Owner's Project Manager	Barbara Ostuno, PE
Owner's address, phone, email	1201 Capital Access Road, (225) 379-1047, Barbara.Ostuno@LA.GOV		
Services commenced by this firm (mm/yy)	03/12	Total consultant contract cost (\$1,000's)	71.517
Services completed by this firm (mm/yy)	08/13	Cost of consultant services provided by this firm (\$1,000's)	71.517
Preparation of Final Plans from Preliminary Plans and Topographic Survey previously initiated by others. Project required preparation of scour analyses, revisions of the project geometric layout, incorporation of prior Plan in Hand review comments, coordination of geotechnical investigations, coordination with utility conflicts for primary water, natural gas and sanitary sewer crossings, interaction with Parish personnel, preparation of non-standard bridge bent approach slab details, and roadway plan preparations. All members of the TriCoeur staff were involved in the project and 100% performed in Louisiana.			

Firm name	Landsource, Inc.		Past Performance Evaluation Discipline(s)*		SURVEY	
Project name	Pine Street over West Prong of Young’s Bayou & Harrison – Collier Streets over Concrete Drainage Canal				Firm responsibility	Sub
Project number	State Proj. No. H.013122.5	Owner’s name	LA Dept. of Transportation & Development			
Project location	Ouachita Parish		Owner’s Project Manager	Barry Gahagan, P.E.		
Owner’s address, phone, email		9270 Siegen Ln., Baton Rouge, LA 70810 (225)228-2681, bgahagan@tricoeur.com				
Services commenced by this firm (mm/yy)		12/18	Total consultant contract cost (\$1,000’s)			11.0
Services completed by this firm (mm/yy)		01/19	Cost of consultant services provided by this firm (\$1,000’s)			11.0

The project's objective was to develop plans for the replacement of two (2) bridges in Ouachita Parish, which was off the State Highway System. LandSource, Inc. was responsible for all the surveying, which included topographic, field and right-of-way surveys. All LandSource personnel listed on the prime's organizational chart were involved in this project & will be utilized in any future projects. 100% of the work was performed in Louisiana.

Firm name	Landsource, Inc.			Past Performance Evaluation Discipline(s)*	SURVEY	
Project name	Jim Cryer Rd. over Bayou Anacoco				Firm responsibility	Sub
Project number	State Proj. No. H.013098.5	Owner's name	LA Dept. of Transportation & Development			
Project location	Vernon Parish			Owner's Project Manager	Barry Gahagan, P.E.	
Owner's address, phone, email		9270 Siegen Ln., Baton Rouge, LA 70810 (225)228-2681, bgahagan@tricoeur.com				
Services commenced by this firm (mm/yy)		11/18	Total consultant contract cost (\$1,000's)			6.0
Services completed by this firm (mm/yy)		01/19	Cost of consultant services provided by this firm (\$1,000's)			6.0

The project's objective was to develop plans for the replacement of a bridge in Vernon Parish, which was off the State Highway System. LandSource, Inc. was responsible for all the surveying, which included topographic, field and right-of-way surveys. All LandSource personnel listed on the prime's organizational chart were involved in this project & will be utilized in any future projects. 100% of the work was performed in Louisiana.

Firm name	Landsource, Inc.			Past Performance Evaluation Discipline(s)*		SURVEY	
Project name	Bayou Bonne Idee Rd Bridge (Site 1) & Bud Rd Bridge over Bayou Bonne Idee (Site 2)					Firm responsibility	Sub
Project number	State Proj. No. H.011532.5	Owner's name	LA Dept. of Transportation & Development				
Project location	Morehouse Parish			Owner's Project Manager	Barry Gahagan, P.E.		
Owner's address, phone, email		9270 Siegen Ln., Baton Rouge, LA 70810 (225)228-2681, bgahagan@tricoeur.com					
Services commenced by this firm (mm/yy)			3/2015	Total consultant contract cost (\$1,000's)			16.00 Est.
Services completed by this firm (mm/yy)				Cost of consultant services provided by this firm (\$1,000's)			16.00 Est.

The project's objective was to develop plans for the replacement of two (2) bridge in East Baton Rouge Parish, which was off the State Highway System. LandSource, Inc. was responsible for all the surveying, which included topographic, field and right-of-way surveys. All LandSource personnel listed on the prime's organizational chart were involved in this project & will be utilized in any future projects. 100% of the work was performed in Louisiana.

Firm name	ECS Southeast, LLP	Past Performance Evaluation Discipline(s)*	Environmental
Project name	Storage Depot Property - Wetland Services		Firm responsibility (prime or sub?) Prime
Project number	N/A	Owner's name	Madsen Homes
Project location	Hardeeville, SC	Owner's Project Manager	Pat Madison
Owner's address, phone, email	21 Promenade Street Bluffton, SC, 29910 (843) 707-2772 patmadsenhomes@gmail.com		
Services commenced by this firm (mm/yy)	01/2022	Total consultant contract cost (\$1,000's)	N/A
Services completed by this firm (mm/yy)	02/2022	Cost of consultant services provided by this firm (\$1,000's)	\$1,800

The client requested a wetlands delineation for two parcels in Hardeeville, SC. During the site reconnaissance it was apparent that heavy machinery had been used on site and created ruts along the pine rows. This made the delineation more challenging as the ruts had standing water from a previous rain event.

Firm name	ECS Southeast, LLP	Past Performance Evaluation Discipline(s)*	Environmental
Project name	Clarksville Athletic Complex - Wetlands/NPDES	Firm responsibility (prime or sub?)	Prime
Project number	N/A	Owner's name	City of Clarksville
Project location	Clarksville, TN	Owner's Project Manager	David Smith
Owner's address, phone, email	Public Square Clarksville, TN, 37040 (931) 645-7444 david.smith@cityofclarksville.com		
Services commenced by this firm (mm/yy)	12/2019	Total consultant contract cost (\$1,000's)	N/A
Services completed by this firm (mm/yy)	12/2020	Cost of consultant services provided by this firm (\$1,000's)	\$16,500

ECS was initially contracted by the City of Clarksville to conduct a wetland delineation on a portion of the proposed athletic complex property in December 2019. Following this in February 2020, ECS was requested to conduct a wetland delineation on the remainder of the property as well as to facilitate a jurisdictional determination request from the US Army Corps of Engineers (USACE) and the Tennessee Department of Environment and Conservation (TDEC).

Upon City Council approval of the first construction phase, ECS was contracted to facilitate section 401 Aquatic Resource Alteration Permitting (ARAP) through TDEC for a proposed impact to approximately 0.98-acres of wetlands. This specific permitting process is unique in that no section 404 permitting is required through USACE since the wetland area was determined to not be Waters of the US during jurisdictional determination. As of this writing, ECS is currently working with TDEC on the application package and associated mitigation requirements.

ECS is also under contract to facilitate the application process for NPDES/construction general permitting once the ARAP permit is obtained.

18. Approach and Methodology:

INTRODUCTION

The staff provided by the TriCoeur Services, LLC team offer a combined over 60 years of LADOTD Off-System Bridge Replacement (OSBR) experience with a record of project delivery for the OSBR program. Our staff has surveyed and prepared plans for OSBR projects involving both standard plan and numerous non-standard structures in accordance with appropriate LADOTD procedures and manuals including roadway and bridge design, BDEM, BDTM's, environmental and OSBR guidelines. Our team is led by **Barry Gahagan, PE, PLS** with over 40 years of design experience primarily in service to LADOTD. Since TriCoeur's inception in 2010 Barry has served as project manager on **9 LADOTD bridge replacements, as well as 5 Parish bridge replacements in general conformance with OSBR** coordinating with other federal funding sources. **Barry's design and project management experience** includes both On and Off-System bridges ranging from very low volume rural to major arterial / Interstate interchange structures.. Our Survey team includes David L. Patterson, PLS, who has led TriCoeur's survey effort on 7 LADOTD bridge replacements who has been involved in the OSBR program over 15 years. TriCoeur's team includes ECS Southeast, LLP and Andrew Knight with a 17 year history of environmental service experience. He is a wetland scientist and wildlife biologist background focusing on the natural resource and regulatory needs of clients and has worked successfully with TriCoeur on previous projects.

PROJECT UNDERSTANDING, SITE VISIT, & EXPECTED CHALLENGES

TriCoeur is familiar with the Martin Lane bridge site **being a conventional precast concrete slab span bridge** along the west bank of the Mississippi River, downriver of New Orleans and serving access to Happy Jack Marina. We are familiar with project challenges, utility, and traffic access concerns. Additional design elements which will need early consideration and resolution will be alternative guard rail / tapered barrier rail due to the structures' proximity to the intersection, and channel bank.

KICKOFF MEETINGS

Following the NTP, TriCoeur will meet with the OSBR Program Manager and staff to discuss the project, review the schedule, receive LADOTD field books, review any program guideline changes, invoice requirements, and establish communication protocols. Our project schedule will be based on critical path items with concurrent items being utilized to **expedite project delivery**.

TriCoeur will also meet onsite with **Parish** representatives prior to the start of topographic surveys consistent with the OSBR Guidelines. Additional items such as planned corridor improvements, hydraulics, structure preferences and corridor users will be discussed. Previous 5-years crash history will also be requested at this meeting. Meeting minutes for both meetings will be provided within 3 days of the meeting for review.

TOPOGRAPHIC SURVEY

TriCoeur's engineering staff will work closely with survey staff during this phase to ensure that all required data is collected, completed, and reported in accordance with LADOTD Off-System Bridge Guidelines.

GPS control will be established using four (4) control points set in concrete with digital levels run with horizontal and vertical closure verified by conventional methods. Initial field data including existing bridge limits, channel and roadway limits will be shared with Engineering to facilitate existing alignment geometrics enabling stabling and alignment stakeouts in advance of roadway cross sectioning.

Bridge sketches will be prepared, and the channel traverses shown on the field roll. Channel sections will be of appropriate location and number sufficient both for accurate digital terrain modelling and for hydraulic modelling/analysis.

Survey data will undergo thorough QC/QA with review by both the surveyor, party chief and engineering project manager for completeness and accuracy prior to review submittal.

PRELIMINARY PLAN PHASE DEVELOPMENT

50% STATUS & HYDRAULICS ANALYSIS

Hydrologic analysis will begin once site confirmation and channel / debris flow / design water surface / overtopping characteristics can be determined. Hydraulic analysis will follow with LADOTD authorization to proceed and in preparation of 50% Preliminary Plans.

-Design Criteria

TriCoeur will review the 5-year crash history of the site provided by the Parish to determine the roadway's performance. The roadway is a dead-end service primarily to boat camps. Alternative travel paths are apparent which may facilitate crossing closure for replacement construction. Traffic maintenance alternatives will be confirmed with Parish representatives at kickoff. Anticipated design criteria and LADOTD Design Report will be submitted for review and approval, guiding the remainder of plan development.

-Hydraulics & Scour Analysis

TriCoeur will begin the hydraulics and scour analysis by reviewing additional data including topographic maps, FEMA Firm maps, USGS Quadrangle maps and LiDAR to delineate the site's drainage characteristics. Peak discharges for this site are expected to be based upon coastal flowing conditions. Surface elevations will be generally developed using conventional software including LADOTD's HYDR1130 and HECRAS. Hydraulic design will be conducted in accordance with the LADOTD Hydraulics Manual; as applicable, with results reported; including the Hydraulic Data table. In this coastal site the bridge hydraulics are not anticipated to affect existing land use.

-Bridge Type Considerations

The bridge Type, Size and Location which will determine the appropriate bridge length, revetment slopes and hydraulic opening will be developed at the start of the hydraulics analysis. An RCB may be analyzed as a potential replacement structure option. If needed, TriCoeur's staff has the experience and design tools to perform non-standard bridge structure designs per LRFD methodology although none are anticipated for this site.

-50% Preliminary Plans

Once hydraulic analysis and reporting is complete, the remainder of the 50% PP will be developed including the roadway design horizontal and vertical geometry, guardrail, roadside drainage considerations, cross-sectional geometrics and transitions. The roadway will be modeled to determine the limits of construction. Plans will be developed in accordance with LADOTD plan preparation and OSBR Guidelines. Should Design Exceptions or Waivers be recommended, Draft forms will be submitted for DOTD and Parish consideration.

75% STATUS (PRE-PIH) & SOLICITATION OF VIEWS (SOV's)

Following the 50% Preliminary Plan review, TriCoeur will address all comments and will; unless otherwise directed, advance plans to a Pre-PIH review status. Should this project's scope clarity be confirmed at the 50% status this proceed to Plan in Hand without the submittal of Pre-PIH plans, aiding in project delivery. Upon approval of the replacement structure, TriCoeur and ELOS Environmental will prepare the Solicitation of Views (SOVs), receive LADOTD approval thereof and mail these to the recipient list provided by LADOTD Environmental Section. Responses will be logged and loops closed to all SOV responses.

95% STATUS (PLAN IN HAND)

Comments from the preceeding review(s) will be addressed in the Plan in Hand submittal. The roadway model, typical sections, plan & profiles, general notes, general bridge plan, summary of estimated quantities, and construction signing will be developed from the previous plan submittal(s). No superelevation is anticipated for this tangent alignment. Standard Plan lists, cost estimate and the Constructability & Biddability Review form will be provided. TriCoeur will attend the Plan in Hand meeting onsite with LADOTD and Parish representatives. Meeting notes will be provided within one week of receipt of compiled participating stakeholder comments.

100% STATUS (POST PLAN-IN-HAND PRINTS)

Plan development will continue to progress as comments are addressed and major design elements are completed. Items discussed at the PIH meeting will be addressed and added to the plans per the PIH Meeting Memorandum.

-Environmental

The wetland delineation will be initiated upon authorization and will be conducted onsite. A wetland findings report prepared in accordance with US Army Corps of Engineers (USACE) guidelines. A Preliminary Jurisdictional Determination (PJD) will be requested from the USACE upon report completion. Permit sketches sized 8.5"x11" will be prepared to accompany the wetlands report, SOV packet, and Environmental Determination Checklist.

-R/W Sketches & Other Documents

TriCoeur will prepare the Right of Way Sketch per OSBR guidelines showing any required taking lines and anticipated parcels affected along with a draft of the R/W agreements. A draft utility conflict assessment will be provided to the Parish to aide in required utility relocations. In addition to the 100% Preliminary Plans, environmental package and R/W sketches, the Design Report forms will be finalized and sealed by TriCoeur's project manager. Checklists will be prepared and submitted. Pile length requests with all supporting documentation will be submitted at this stage for use by the geotechnical engineer.

FINAL PLAN DEVELOPMENT

60% FP STATUS (PRE-ADVANCED CHECK PRINTS)

Following the environmental approval and receipt of the Notice to Proceed for Final Plans, TriCoeur will promptly develop detailed plan sheets including embankment widening details, geometric layouts (if required), erosion control plans, quantity summary sheets, Pile Data & Bent Elevation, and concrete surface finish. All bridge structure and pile cutoff elevations will be finalized. Any special design superstructure or substructure bridge elements or special approach slabs will be fully detailed and placed on bridge sheets. Bridge railing, joint and bearing details will also be completed. Should nonstandard structure /component be required for the site, a draft of the bridge calculations and Load Resistance and Factor Rating (LRFR) will be prepared at this stage to ensure adequacy of reviews.

95% & 98% FP STATUS (ADVANCED CHECK PRINTS)

Comments from the Pre-ACP submittal will be reviewed with LADOTD and resolved/addressed. Additional details, notes or changes will be added to the plans and quantities will be completed. The ACP Plans will be provided to the PlanQuality Unit (PQU), if necessary. If necessary, an ACP review meeting will be held to ensure all comments are addressed. Upon resolution, 98% Final Plan plans will be prepared for review by the Chief Engineer and use by General Files to prepare the proposal. TriCoeur will work with LADOTD staff to input pay items and quantities into AASHTOWARE and generate final cost estimates.

100% FP STATUS (TRACINGS)

TriCoeur will provide the 100% Final Plans (Tracings) as per OSBR Guidelines with the Title Sheet on Mylar for Chief Engineer signature. This submittal will be prepared once all comments are addressed from task managers, PQU and/ or the Chief Engineer. Parish granted Design Exceptions will be noted on the Title Sheet. A bound calculations book will be prepared and submitted with the original field books and an electronic copy of the Hydraulics Report.

QUALITY CONTROL AND QUALITY ASSURANCE (QC/QA)


Each submittal will be accompanied by LADOTD QC/QA certification forms. Design and plan comments, along with their resolutions will be documented in TriCoeur's Design Comment Review forms.

LETTING

TriCoeur will be available to assist LADOTD during letting including responses to Falcon questions. Upon receiving the bid results and tabulations, TriCoeur can; upon request, provide additional information to LADOTD as needed regarding contract award, etc.

STAGE 5: CONSTRUCTION

TriCoeur's staff will be available to assist LADOTD with Construction Support (if necessary) including RFI responses, attending meetings, and reviews of shop drawings, design review of construction modifications, and other such contractor submittals.



19. Workload:

Firm(s)	Past Performance Evaluation Discipline	State project number	Project name	Remaining Unpaid Balance
TriCoeur Services, L.L.C.	Bridge	H.013098.5	Off System Bridge Program, Vernon Parish Jim Cryer Road Bridge, Stage 3 – Part IV Final Plans	\$9,228
LandSource, Inc.	Survey	N/A	N/A	N/A
ECS Southeast, LLP	Geotechnical	Contract 4400024657	IDIQ Contracts for Geotechnical Services	\$0

20. Certifications/Licenses:



Louisiana
SECRETARY OF STATE
R. KYLE ARDOYN



HOME

Search for Louisiana Business Filings

[Buy Certificates and Certified Copies](#) [Subscribe to Electronic Notification](#) [Print Detailed Record](#)

Name	Type	City	Status
TRICOEUR SERVICES, L.L.C.	Limited Liability Company	BATON ROUGE	Active

Previous Names
Business: TRICOEUR SERVICES, L.L.C.
Charter Number: 40282112K
Registration Date: 8/19/2010

Domicile Address
9270 SIEGEN LANE
SUITE 501
BATON ROUGE, LA 70810

Mailing Address
9270 SIEGEN LANE
SUITE 501
BATON ROUGE, LA 70810

Status
Status: Active
Annual Report Status: In Good Standing
File Date: 8/19/2010
Last Report Filed: 7/20/2022
Type: Limited Liability Company

The Louisiana Professional Engineering and Land Surveying Board has the following information on file:

Name: Public Address:
Mr. Barry P. Gahagan, PE, PLS9270 Siegen Lane, Suite 501
TriCoeur Services, LLC
Baton Rouge, Louisiana 70810

License/Certificate Information w/ Supervision


License	Status	First Issuance Date	Expiration Date	Supervisor(s)
EF.0004660	Active	09/16/2010	03/31/2023	Mr. Barry Patrick Gahagan # PE.0021586 - Active

The Louisiana Professional Engineering and Land Surveying Board has the following information on file:

Name: Public Address:
Mr. Barry P. Gahagan, PE, PLS9270 Siegen Lane, Suite 501
TriCoeur Services, LLC
Baton Rouge, Louisiana 70810

License/Certificate Information w/ Supervision

License	Status	First Issuance Date	Expiration Date	Supervisor(s)
VF.0000653	Active	09/16/2010	03/31/2023	Mr. Barry Patrick Gahagan # PLS.0004834 - Active

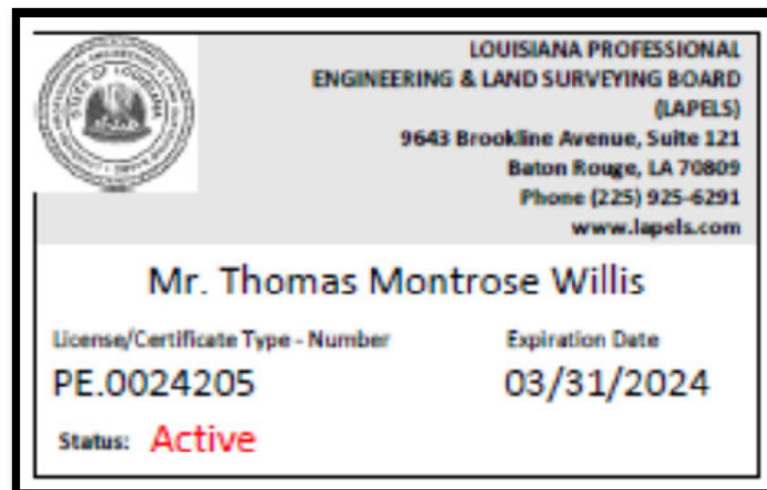


The Louisiana Professional Engineering and Land Surveying Board has the following information on file:

Name: Public Address:
Landsource, Inc. Ms. Sandra Wiley 6730 Exchequer Drive
Baton Rouge, Louisiana 70809

License/Certificate Information w/ Supervision

License	Status	First Issuance Date	Expiration Date	Supervisor(s)
VF.0000377	Active	02/13/1996	09/30/2024	Mr. David Lee Patterson # PLS.0004784 - Active

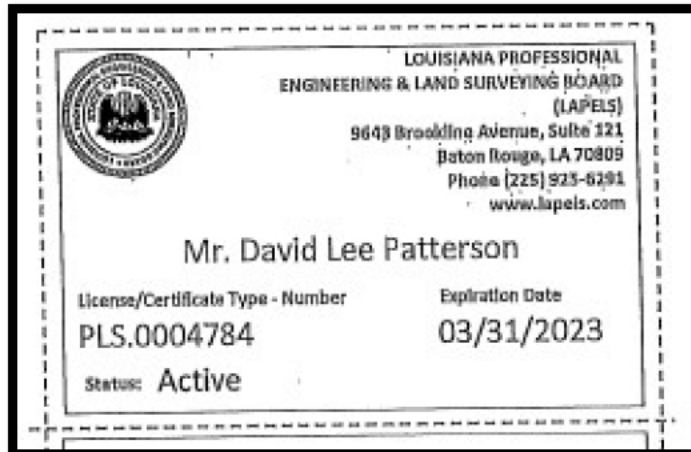

C E R T I F I E D
SURVEY TECHNICIAN

Michael C. Pitre

through knowledge, experience and testing has met the requirements
established by the Certified Survey Technician Board.



Level III Boundary

Level

President

Michael C. Pitre

1003-1863

Certificate Number

6/30/2023

Expiration Date

NSPS
CST
CERTIFIED SURVEY TECHNICIAN




LADOTD CONTRACT No. 4400025191
S.P. No. H.015051.5
F.A.P. No. H01505
MARTIN LANE OVER DRAINAGE CANAL
PLAQUEMINES PARISH

Quality Control / Quality Assurance Plan ***Off System Bridge Program***

Declaration:

TriCoeur Services, L.L.C. and its design team shall maintain and follow active Quality Control / Quality Assurance procedures in conformance with the no less than the minimum requirements set in the “Guidance on QC/QA in Bridge Design in Response to NTSB Recommendations (H-08-17)” (FHWA/AASHTO Guidance), which was published by FHWA and AASHTO in August 2011, and LADOTD Bridge Design Section QC/QA policies for the duration of this project.

Signature of Official:  Date: 1/17/2023

Project Modules/Components & Assignments

Module - Component Description	Project Manager/ Supervisor / Team leader	Professional of Record (P.O.R.)	Checker	Reviewer
Stage 3, Part Ia				
- Topographic Survey	B Gahagan, PE, PLS	D Patterson, PLS (Landsource)	S Patterson, PLS (Landsource)	M Pitre (Landsource)
Stage 3, Part III:				
- Preliminary Plans	B Gahagan, PE, PLS	B Gahagan, PE, PLS	N Lowe, EI	B Gahagan, PE, PLS
- Hydraulic & Hydrologic	B Gahagan, PE, PLS	TM Willis, PE	B Gahagan, PE, PLS	TM Willis, PE
- Solicitation of Views & Categorical Exclusion	C Schaeffer (ECS)	A Knight (ECS)	J Thibodeaux (ECS)	A Knight (ECS)
- Wetland Studies	C Schaeffer (ECS)	A Knight (ECS)	J Thibodeaux (ECS)	A Knight (ECS)
- Environmental Clearance	C Schaeffer (ECS)	A Knight (ECS)	J Thibodeaux (ECS)	A Knight (ECS)
- Right of Way Agreement / Sketch	B Gahagan, PE, PLS	B Gahagan, PE, PLS	N Lowe, EI	B Gahagan, PE, PLS
Stage 3, Part IV				
- Final Plans	B Gahagan, PE, PLS	B Gahagan, PE, PLS	TM Willis, PE N Lowe, EI	B Gahagan, PE, PLS

QC procedures shall assure:

- 1) A supervisor or team leader is responsible for determining the necessary technical knowledge and experience of the designer/checker for that specific design; Designers & checkers are assigned to bridge projects by matching experience to project complexity.
- 2) All bridge plan sheets shall include the names or initials and dates of the appropriate designer and checker, and may include their signatures. Including the names or initials of the drafter and reviewer is also good practice. Sealing of the bridge plans by the engineer in responsible charge of the work should follow state requirements.
- 3) All relevant special provisions shall be identified by the appropriate author in responsible charge and checker. Sealing of special provisions should follow state requirements.
- 4) Design calculations, check calculations, review comments/resolutions and other pertinent documents as discussed above shall be retained in the permanent bridge design file. Including other important documents like QC checklists, cost estimates, and supporting reports in the design file is good practice.
- 5) A documented program which details the procedures, standards, and policies to be used in the oversight of bridge design.

QA procedures shall include:

- 1) Independent check of design calculations with depth and extent of this review commensurate with bridge size, complexity, and level of risk.
- 2) Participation in field engineering reviews during design, construction, and in-service.

Design Criteria:

- 1) Louisiana Department of Transportation and Development - Off System Highway Bridge Program Guidelines – Latest Edition
- 2) Reference Project Advertisement (Pg 5)

Design Checklists:

- Louisiana Department of Transportation and Development - Off System Highway Bridge Program Guidelines – Latest Edition
- 1) Location (Topographic) Survey Checklist
 - 2) Plan-in-Hand checklist
 - 3) Constructability / Biddability checklist

PLAN / CONSTRUCTABILITY / BIDDABILITY REVIEW (ADOPTED FROM LADOTD WITH MODIFICATIONS)

Purpose:

- To provide information to assist in producing quality plans.
- To provide a history of information that is easily accessible.
- To provide questions to stimulate discussion of potentially problematic areas.
- To provide questions to stimulate checking details and items required to complete the project.
- To provide aid during design for QA/QC
- To provide primary discussion for the plan-in-hand meeting

Instructions for completing the form

- The Design Review portion of the form shall be filled out by the designer during design and prior to PIH submittals.
- The form may be filled out by any district person (ADA, Area Engineer, Lab Engineer, etc.) but the Project Engineer must sign the signature sheet that he concurs with the comments. It is encouraged that the Area Engineer and the Project Engineer both review the plans.
- The Project Engineer and any District personnel designated by the Project Engineer are responsible for reviewing the plans and filling out the review form. The Project Engineer and all reviewers must sign the signature sheet at the back of the form. The Area Engineer is also encouraged to review the plans.
- If answer to the question is in blue box (or lightly shaded if in black and white), a comment is **NOT** required.
- Most questions are designed that a “NO” answer will require comments on what is missing or needed.
- Most questions are designed that a “YES” answer means the plans meet the project needs or a follow up question is required.
- Comments should be shown by reference number on notes page for easy reference. (Example III-2)
- Constructability and Plan-in-Hand questions shall be answered prior to the Plan-in-Hand. The plans should provide enough detail to construct the work required.
- ACP and PS&E / Biddability submittal shall have copies of the completed PIH review attached. If missing contact the Project Manager for a copy. The plans and specifications should provide the details and pay items to bid the project.
- Project Managers are required to respond to all comments and copy all reviewers.
- Each review is considered complete when all comments are addressed
- If question is answered N/A, question is not applicable to project.
- 95% Final Plan reviews (ACP) shall have the completed 95% Preliminary Plan (PIH) review attached. It may be helpful to reference the PIH plan set during the ACP review.
- Comments may be required for certain checklist items. Comments are to be written at the back of the form along with reference numbers for the plan section and checklist item number.

Project managers shall collect all review forms, insert responses to any comments, and copy all reviewers.

APPLICABLE SECTION FOR REVIEW

State Project No. H.015051.5 Route No. N/A P/H –Constructability ☒
 (95% Prelim)
F.A.P. No. H.015051 Parish Plaquemines Advance Check Print ☐
 (95% Final)
Project Name: MARTIN LANE OVER DRAINAGE CANAL

<u>Yes</u>	<u>N/A</u>	<u>#</u>	<u>Description</u>
<input checked="" type="checkbox"/>	<input type="checkbox"/>	I.	TYPICAL SECTION SHEETS
<input checked="" type="checkbox"/>	<input type="checkbox"/>	II.	SUMMARY SHEETS
<input checked="" type="checkbox"/>	<input type="checkbox"/>	III.	PLAN-AND-PROFILE SHEETS
<input checked="" type="checkbox"/>	<input type="checkbox"/>	IV.	DRAINAGE INFORMATION
<input type="checkbox"/>	<input checked="" type="checkbox"/>	V.	SIGNAL PLANS
<input checked="" type="checkbox"/>	<input type="checkbox"/>	VI.	GEOMETRIC DETAILS
<input checked="" type="checkbox"/>	<input type="checkbox"/>	VII.	SEQUENCE OF CONSTRUCTION & CONSTRUCTION SIGNING
<input checked="" type="checkbox"/>	<input type="checkbox"/>	VIII.	GENERAL
<input checked="" type="checkbox"/>	<input type="checkbox"/>	IX.	UTILITIES
<input checked="" type="checkbox"/>	<input type="checkbox"/>	X.	STRUCTURES - BRIDGE

**PLAN-IN-HAND INSPECTION REPORT
AND
CONSTRUCTABILITY / BIDDABILITY REVIEW**

Description	Design Review/ Comments			Construction							
				Plan-in-Hand Constructability			ACP		PS&E Biddability		
	N/A	Yes	No	N/A	Yes	No	Yes	No	Yes	No	No
I. TYPICAL SECTION SHEETS											
1. Has District been consulted on the pavement type?		✓									
2. Is District in agreement with the typical section?											
3. Are project limits covered by typical sections?		✓									
4. Are superelevation diagrams and tables provided?	✓										
4a. If yes, Is the design speed noted on the diagram?											
5. Does the typical section fit within existing and/or proposed right-of-way? (Check cross sections)		✓									
6. Will the typical section drain water from the base course?		✓									
6a. If yes, is there a method/detail to drain and required items?											
7. Is a subgrade layer required?											
7a. If yes, what types are applicable? (List Types)											
7b. If no, Is lime treatment provided in the plans?											
8. Are all measurements, thicknesses, and slope rates labeled and accurately indicate what is to be constructed?		✓									
9. Is the minimum ditch elevation dimension shown on the typical section?		✓									
II. SUMMARY SHEETS											
1. Will existing ditch cleaning be required?											
1a. If yes, are there limits and pay items?											
2. Are there sufficient removal items for the types of pavement/structures being removed?	✓										
3. Is method of payment for earthwork design addressed (e.g. "temporary" borrow, "additional excess", detour material, embankment, etc.)?		✓									
4. Have sufficient temporary erosion control items been included?		✓									

Description	Design Review/ Comments			Construction							
				Plan-in-Hand Constructability			ACP		PS&E Biddability		
	N/A	Yes	No	N/A	Yes	No	Yes	No	Yes	No	No
5. Are construction entrances required?											
5a. If yes, are the number and section shown?											
6. Is method of payment for removal of pavement satisfactory?											
7. Is traffic maintenance aggregate required?											
7a. If yes, how much?											
8. Is there a summary of drainage structure sheet provided?											
8a. If yes, are items adequately covered?											
8b. If no, is one required? Why?											
9. Are work elements identified clearly with all corresponding pay items included with adequate quantities to construct project? (i.e. summary tables)	✓										
10. Is there any work under this project designated as "no direct pay"?			✓								
10a. If yes, is this work clearly linked to a specific pay item that can be quantified in the contractor's bid item list?											
11. Are permanent erosion and pollution control items included?		✓									
III. PLAN-AND-PROFILE SHEETS											
1. Is adequate right-of-way provided for relocation of utilities?		✓									
2. Is there space between the R/W line and drainage structure to allow for utility relocation?		✓									
3. Are right-of-way and property line dimensions shown on plans?		✓									
4. Will any right-of-entry agreements be required?			✓								
4a. If yes, is this satisfactory?											
4b. If yes, who will secure it?											
5. Does existing horizontal or vertical clearance allow for construction?											
6. Are all the utility owners with contact numbers listed?		✓									
7. Are the existing utility locations marked in the plans?		✓									
8. Are the utility conflict boxes and their location noted on the plans?		✓									
9. Will overlay affect the intersection, gutters, or curbs drainage?	✓										
9a. If yes, are adjustments required?											
10. Are retaining walls required?			✓								

Description	Design Review/ Comments			Construction							
				Plan-in-Hand Constructability			ACP		PS&E Biddability		
	N/A	Yes	No	N/A	Yes	No	Yes	No	Yes	No	
10a. If yes, are details provided for the walls?											
11. Are all oil or gas wells on the project shown on the plans?	✓										
12. Are encroachments on the right-of-way being addressed?											
13. Are existing improvements within 50' of required right-of-way shown on the plans?		✓									
14. Is there any potential hazardous waste site / UST?			✓								
15. Have construction or drainage servitudes been shown?		✓									
16. Are the limits of clearing, grubbing, and landscaping shown?		✓									
17. Can any significant tree be allowed to remain?											
17a. If yes are those to remain been identified?											
18. Are there apparent conflicts between plans and specifications?			✓								
19. Are the benchmark data, required elevations, and curve data on the plans?		✓									
20. Does location of the grade shown on the typical section (sub grade or finished) match grade shown in profile? (Check for label)		✓									
21. Are vertical and horizontal limits of removal clear?											
21a. If yes, are the depths of embedment required excavation shown.											
21b. If yes, are details of removable item required?											
22. Have arrangements been made for relocation of hydrants by utility agreement?											
23. Do general site conditions conform to those represented in plans?											
24. Is existing topography accurate and up-to-date?											
25. Does profile fit the terrain?		✓									
IV. DRAINAGE INFORMATION											
1. If subsurface drainage is being used, is there any evidence of effluent sewerage entering existing roadside ditches?											
1a. If yes, what is the plan of action											
2. Is adequate outfall information shown?		✓									
3. Has sufficient drainage excavation and/or cleaning of outfall lateral required for adequate drainage been shown?											

Description	Design Review/ Comments			Construction							
				Plan-in-Hand Constructability			ACP		PS&E Biddability		
	N/A	Yes	No	N/A	Yes	No	Yes	No	Yes	No	No
3a. If yes, who is cleaning laterals (City, Parish)?											
4. Will cleaning be required for existing drainage structures?											
4a. If yes, are pay items included?											
5. Will special ditch protection items be required?											
5a. If yes, identify type											
6. Have existing drainage patterns, their continuity, and high water indications been identified?		✓									
7. Are ditches compatible with existing and proposed drainage structures?		✓									
8. Is design drainage elevations shown in the plan compatible with the existing conditions?		✓									
9. Is there a provision for temporary drainage?											
10. Is water being trapped on the lanes on travel lanes which are to be maintained during construction?											
11. Is there a method to connect new and existing drainage facilities?		✓									
12. Is a second profile sheet required for right and left of centerline?			✓								
V. SIGNAL PLANS – Not Anticipated for this Project (Review with Traffic Engineer)											
1. Are pole locations in conflict with utilities or drainage structures?											
2. Are a controller, signal head, pull box, and pedestrian poles required?			✓								
3. Is the existing controller compatible to added items?	✓										
4. Are overhead power lines in conflict with span wire?											
5. Will fiberglass insulators be required or relocated?											
6. Are there any signs attached to the overhead span wire for the existing traffic signal?											
7. Is the disposition of existing signal poles and signal equipment to be removed identified?	✓										
8. Is the sidewalk being obstructed by signal equipment access?	✓										
9. Does the foundation match requirements for span lengths/mast arms?	✓										
9a. If yes, are details provided?	✓										
10. Are street name signs included on mast arms?	✓										
10a. If yes, are details provided?	✓										
11. *Are communication cables overhead?											
11a. If yes, will they fit with overhead electric?											

Description	Design Review/ Comments			Construction							
				Plan-in-Hand Constructability			ACP		PS&E Biddability		
	N/A	Yes	No	N/A	Yes	No	Yes	No	Yes	No	
12. Do loop detectors exist?											
12a. If yes will existing loop detectors be destroyed by construction?											
12b. If loop detectors are being replaced, are all pay items included (i.e. conduit, junction boxes, conduit, etc.)?											
12c. Will cameras be added?											
13. Is jacking and boring required?	✓										
14. Is open trenching required?	✓										
15. Is right-of-way adequate for signal equipment? (e.g. for signal and lighting foundations, utility relocations, construction easements, adequate work space, desirable clear zone, etc.)	✓										
16. Are temporary traffic signals required?											
16a. If yes, who will be responsible?											
VI. GEOMETRIC DETAILS											
1. Have all areas where improvements can be made to alignment been addressed?											
2. Are sight distances adequate at intersections? (r/w flares, obstructions, etc.)		✓									
3. Is the required information shown on the geometric sheets (e.g. curve data, sight distance, vertical datum, centerline, etc.)		✓									
4. Is existing access being denied due to inadequate sight distance?			✓								
VII. SEQUENCE OF CONSTRUCTION & CONSTRUCTION SIGNING											
1. Is through traffic to be maintained?			✓								
1a. If no, is a detour provided?		✓									
2. If local traffic only, are sufficient details and items provided for school buses, mail carriers, emergency vehicles, or other local traffic to be maintained.											
3. Is temporary sheeting required to maintain existing/required travel lanes?			✓								
3a. If yes, are specifications and details provided?											
3b. If yes, is method of payment satisfactory?											
4. Are there conflicts between new and existing roadway used to maintain traffic?			✓								
5. Are traffic control plans for the bridge coordinated with roadwork phasing?											

Description	Design Review/ Comments			Construction							
				Plan-in-Hand Constructability			ACP		PS&E Biddability		
	N/A	Yes	No	N/A	Yes	No	Yes	No	Yes	No	
6. Can utility crossings be resolved via scheduling restrictions (i.e. weekends, after hours) or temporary structures?											
7. Do utilities conflict with required special construction sequencing?			✓								
8. Are traffic operations requirements properly addressed? (i.e., signing, pavement markings signal, etc.)		✓									
9. Are lanes on which traffic is to be maintained compatible to local conditions?											
10. Is there sufficient clearance within the work zone for the operations (such as crane swing room)?											
11. Are there adequate accommodations for intersecting and crossing traffic?											
12. Have pedestrian and bicycle accommodations been addressed?		✓									
13. Has a method of containing bridge slopes during phased construction (at end bent) and approach grade separation been identified?	✓										
14. Have restrictions (e.g. lane closure, general construction or peak-hour restrictions in urban areas) been identified?	✓										
15. Are there notes covering pay for traffic control items?		✓									
16. Is the Traffic Control Plan clear, complete, and approved?											
17. Are items for temporary safety devices, requirements and provision (i.e. guardrail, attenuators, barrier rails, etc.)?		✓									
18. Have the traffic control signs, warning devices and barricades been located?		✓									
Scheduling & Phasing											
19. Is scheduling and phasing coordinated with activity needs? (Schools, festivals, harvesting, parallel routes, etc.)											
20. Will staging areas be provided to contractors that will accommodate the sequence of work and work areas?											
21. Is the type and limits of fence for temporary construction servitude identified?	✓										
22. Have requirements for local/state/federal special permits been addressed?		✓									
23. Is existing access being denied by obstacles (walls, guard rails, etc.) or grade differentials to adjacent property?											
24. Is safe pedestrian access and access to business and residences provided?		✓									
Detours											

Description	Design Review/ Comments			Construction							
				Plan-in-Hand Constructability			ACP		PS&E Biddability		
	N/A	Yes	No	N/A	Yes	No	Yes	No	Yes	No	
25. Is detour facility clearly depicted?			✓								
26. Do the detour limits conflict with roadway improvements?			✓								
27. Is method of payment for detour satisfactory?											
28. Can detours be built due to grade difference between new and existing roadways?		✓									
29. Is traffic addressed on side streets?		✓									
30. Is night work required?			✓								
31a. If yes, are hours and/or restrictions shown?	✓										
VIII. GENERAL											
1. Are appropriate general notes and special provisions required for construction provided?											
2. Is there adequate construction access for demolition?											
3. Are there adequate provisions if signs or road markers are to be removed?		✓									
4. Are contamination sites delineated?	✓										
5. If there is a contamination site, have utility relocations been addressed?											
6. Does the Corp permit require work not shown on plans?			✓								
7. Have environmental safeguards or dust control, erosion, and disposal of wastes been addressed?		✓									
8. Are there provisions for noise abatement (e.g. permanent noise walls)?			✓								
9. Do conflicts exist between landscaping and planting requirements with utilities (e.g. irrigation lines) and billboards?											
10. Is there sufficient space (25'-30') for power mowers between additional trees that are planted?	✓										
11. Is there an erosion control plan provided? (to be provided in Final Plans)			✓								
12. Where pile driving is to be encountered near existing structures, should pre-existing conditional survey (video/pictures) be performed on the existing structures?											
12a. If yes, are items provided?											
13. Did you create any S-item wording?			✓								
IX. UTILITIES											
1. Will there be disruptions of utilities and provisions for restoration?											

Description	Design Review/ Comments			Construction							
				Plan-in-Hand Constructability			ACP		PS&E Biddability		
	N/A	Yes	No	N/A	Yes	No	Yes	No	Yes	No	
2. If utilities are outside of limits of construction but within the r/w, have all parties (including utility owners) agreed to allow them to remain in-place?			✓								
3. Has responsible party for utility relocation been identified with provisions?											
4. Are there overhead utilities, guy wires, etc. in potential conflict with operations and access of large equipment?											
5. Are there gas lines above other utilities?											
6. Are there conflicts between gravity and force sewer mains and construction?		✓									
6a. If yes for force main, is there a utility agreement for relocation?	✓										
6b. If yes for gravity sewer, are plans included for relocation of sewer?			✓								
7. Are there utility conflicts with drainage?											
8. If project is preceded by clearing and grubbing contract, have utilities been relocated?											
9. If there are pipelines, are they shown in the profile?		✓									
10. If there is a need for a specified utility corridor?			✓								
10a. If yes, is it shown?											
11. Should an integrated utility relocation plan (scheduling and final location of utilities) be included in the construction plans?			✓								
11a. If yes, is the integrated utility relocation plan included in the construction plans?	✓										
X. STRUCTURES											
GENERAL NOTES, INDEX, AND BRIDGE SUMMARY OF QUANTITIES											
GENERAL NOTES & INDEX											
1. Is information complete, accurate, clear and free from multiple interpretations?		✓									
2. Have all environmental commitments been identified?			✓								
3. Has the disposition of salvageable materials been addressed?											
4. Are utility permit requests addressed?			✓								
BRIDGE SUMMARY OF QUANTITIES											
1. Are all necessary items shown and properly footnoted?	✓										
2. Are all quantities and units adequately shown?	✓										
3. Have all items been brought forward properly to the Master Summary of Quantities?	✓										

Description	Design Review/ Comments			Construction						
				Plan-in-Hand Constructability			ACP		PS&E Biddability	
	N/A	Yes	No	N/A	Yes	No	Yes	No	Yes	No
4. If the project is composed of multiple project numbers or funding sources have the quantities been subdivided?	✓									
5. Have all non FHWA participating items been identified?	✓									
GENERAL BRIDGE PLANS										
1. Are all geometric controls shown and consistent with other sheets?	✓									
2. Does each plan sheet provide a clear layout and configuration of the intended structure (matchlines, span/bent numbering, joint types, etc.)?	✓									
3. Does the roadway and bridge interface agree?	✓									
4. Has all guard rail installation information been shown?	✓									
5. Are vertical clearances shown (navigable waterways, roads under bridge, etc.)?	✓									
6. Is deck drainage type specified (drain holes ,barrier slots, etc.)?	✓									
HYDRAULIC DATA										
1. Is the hydraulic table shown?		✓								
2. If river gauges are present, has the removal and disposition of these gauges been addressed?	✓									
3. Has predicted scour, scour protection and abutment protection been adequately addressed?		✓								
4. Have design water surface elevations been shown?		✓								
5. Do all water surface elevations reference the project survey datum?		✓								
6. Have any channel changes been addressed in the plans?		✓								
GEOTECHNICAL INFORMATION (If not addressed on foundation plan)										
1. Have all borings, CPT, test piles, and settlement plates been shown on the plans?			✓							
2. Has all temporary shoring for phased construction been covered adequately?	✓									
3. Is Pile Batter indicated (if not shown on bent details)?	✓									
CONSTRUCTION CONFLICTS										
1. Is the existing structure shown?		✓								
2. Are all utilities to remain shown?		✓								

Description	Design Review/ Comments			Construction							
				Plan-in-Hand Constructability			ACP		PS&E Biddability		
	N/A	Yes	No	N/A	Yes	No	Yes	No	Yes	No	No
<u>SUPERELEVATION DIAGRAMS</u>											
<i>(Superelevation implementation plans should always be included when superelevation transition occurs on the bridge. The bridge superelevation will control the design.)</i>											
1. Is the superelevation implementation plan clear and concise?	✓										
2. Is the transition from roadway to bridge clearly conveyed?	✓										
<u>FOUNDATION PLAN</u>											
<i>(A foundation plan may be used when geometry is complex, additional information is required for layout of foundation or conflicts with foundation construction need to be identified)</i>											
1. Has all temporary shoring for any phased construction been covered adequately?	✓										
2. Are all conflicts identified in the plans?	✓										
3. Are all utilities to remain shown?		✓									
4. Is the pile batter shown (if not shown elsewhere)?	✓										
5. Have all overhead or underground obstructions or conflicts that may impede pile driving operations been addressed?											
6. Will pile driving interfere with maintenance of traffic?											
7. Will a pre / post construction site survey for such structures be needed?											
8. Are there any residences, businesses, or facilities (including instrumentation) in the area that may be affected by the noise and vibration from the pile driving operations or construction activities?											
9. Will vibration monitoring be needed?											
<u>SUBSTRUCTURE</u>											
1. Does reinforcement location allow for proper placement of concrete? (Special attention should be given to splice locations)											
2. Are any special details required for superstructure anchorage?			✓								
<u>SUPERSTRUCTURE / APPROACH SPANS AND MAIN SPAN DETAILS</u>											
1. Are details adequate for layout of deck reinforcement?	✓										

Description	Design Review/ Comments			Construction							
				Plan-in-Hand Constructability			ACP		PS&E Biddability		
	N/A	Yes	No	N/A	Yes	No	Yes	No	Yes	No	
2. Are any special details required for special areas of the deck?	✓										
3. Are deck joint details shown?	✓										
4. Are drains removed over railroads, roadways, and revetments?	✓										
5. Are girder connection details shown?	✓										
6. Is adequate information provided for the fabrication of girders, cross frames, and diaphragms?	✓										
7. Has the pouring sequence been specified?	✓										
APPROACH SLABS											
1. Are the drainage details for the approach slab adequately shown?	✓										
NAVIGABLE WATERWAYS (Not anticipated for this Project)											
1. Are details for clearance gauges shown?	✓										
2. Are details for navigation lighting provided?	✓										
3. Has pier protection been addressed?	✓										
MOVABLE BRIDGES (Not for this Project)											
1. Are all required Special Details included (End Drains, fencing, etc.) ?	✓										
2. Has operator's house been located?	✓										
3. Has adequate parking and access been provided for operators house?	✓										
As-Builts											
1. Are As-built drawings required for this project?			✓								
2. Would As-built drawings be helpful for bidding and/or construction?			✓								
3. Are As-built drawings included with these plans?			✓								
Permitting Issues											
1. Are utility permit requests adequately addressed?	✓										
2. Are there any special requirements that need to be addressed in the plans for the construction of a bridge over a navigable water way or roadway? (These requirements may be related to agreements with the USCG, COE or for purposes of maintenance of traffic)			✓								

Description	Design Review/ Comments			Construction							
				Plan-in-Hand Constructability			ACP		PS&E Biddability		
	N/A	Yes	No	N/A	Yes	No	Yes	No	Yes	No	
3. Are there any access issues that may affect the contractors' construction of the bridge or demolition of the existing bridge that have not been addressed in the plans?											
4. Is the water depth at the site of sufficient depth to float barges?											
5. Will barges obstruct navigation?											
6. Are all environmental commitments being met by the proposed construction methods? (These commitments should be noted in the General Notes section of the plans)	✓										
7. Has the removal of the existing bridge been adequately coordinated with the permitting agencies and any special requirements covered in the plans?	✓										
Construction Site Access											
1. Are there any access issues the contractor may have for the delivery of materials to the project site? (Posted bridges)											
2. Are there any driveways or property entrances that will have to be maintained during construction, relocated and / or reconstructed?											
3. Will any work bridges or haul roads be required for the construction of the bridge?											
4. Is there sufficient right of way to construct the bridge structures?											
5. Are there any other construction related issues that will affect the constructability of the project that needs to be accounted for in the construction estimate?											
6. Are there any utilities supported on the structure that need to be addressed in the plans?											
Maintenance of Traffic											
1. For navigational traffic, have channel alignment and clearance issues been addressed?	✓										
2. If the project is to be constructed utilizing phased construction, will the construction scheme facilitate maintenance of traffic?	✓										
General Constructability and Biddability											
1. Are there adequate staging areas for the contractor?											
2. Are all required work items covered under proper pay items?											
3. Have quantities for phase construction been broken out on the individual sheets to facilitate payment during construction?	✓										
4. Has uniformity of formwork been adequately considered in all of the bridge elements?	✓										
K. SPECIAL PROVISIONS (95% Final Plan Review)											

Description	Design Review/ Comments			Construction							
				Plan-in-Hand Constructability			ACP		PS&E Biddability		
	N/A	Yes	No	N/A	Yes	No	Yes	No	Yes	No	
1. Is asbestos or creosote timber being removed?	✓										
(a). Are special instructions and disposal defined?	✓										
(b). Has entity to handle been identified?	✓										
2. Is the contract type and time period sufficient?											
3. Is there a treatment for the removed steel if it has red lead?	✓										

Plan-in-hand inspection report prepared by

Date

Project Engineer

Date

ACP review by

Date

Project Engineer

Date

Constructability / Biddability review by

Date

Project Engineer

Date

NOTES PAGE

Item No	Comment	Response
VII.1	Is through traffic to be maintained?	Parish to provide detour signage
VII.25	Is detour facility clearly depicted?	Parish to provide detour signage
VIII.8	Are there provisions for noise abatement (e.g. permanent noise walls)?	Noise abatement not anticipated
VIII.11	Is there an erosion control plan provided?	Erosion control plan to be prepared in Final Plan Phase
IX.2	If utilities are outside of limits of construction but within the r/w, have all parties (including utility owners) agreed to allow them to remain in-place?	Utility conflicts will be resolved by Parish prior to Bid advertisement
IX.6	Are there conflicts between gravity and force sewer mains and construction? If yes for gravity sewer, are plans included for relocation of sewer?	Gravity Sewer Main conflict to be resolved. Alternatives to resolve will be reviewed at Plan-in-Hand (PIH).
IX.11	Should an integrated utility relocation plan (scheduling and final location of utilities) be included in the construction plans?	Utility conflicts will be resolved by Parish prior to Bid advertisement.
X.2	Have all environmental commitments been identified?	To be reviewed. No pile driving noise/vibrations at issue since no driving is planned.
X.4	Are utility permit requests addressed?	Any utility permit requests will be resolved by Parish prior to Bid advertisement.
X.Geo.1	Have all borings, CPT, test piles, and settlement plates been shown on the plans?	None taken. Geotechnical scope to be discussed at PIH.
X.AsBlt.3	Are As-built drawings included with these plans?	No As built drawings anticipated for inclusion in plans.

22. Sub-consultant information:

If one or more sub-consultants will be used, provide the name, address, point of contact and phone number for each. Otherwise, leave this section blank.

Firm Name (as registered with Louisiana's Secretary of State)	Address	Point of Contact and email address	Phone Number
LANDSOURCE, INC.	6730 Exchequer Dr. Baton Rouge, LA 70809	David L. Patterson patterson@landsource.com	225.752.0995
ECS Southeast, LLP	11211 Industriplex Boulevard Suite 300 Baton Rouge, LA 70809	Joseph Cobena, PE jcobena@ecslimited.com	225.224.2583

23. Location:

If location is an evaluation criterion for this advertisement and the prime consultant intends to establish a local presence, describe the plan for doing so. Otherwise, leave this section blank.

N/A