


Legend

- ① Asphalt:
- 2", ADT ≤ 2,000
 - 3 ½", ADT > 2,000 & ≤ 10,000
 - 4", ADT > 10,000 & ≤ 15,000
- ② 8½" Class II Base Course

* 2.5% Cross Slope

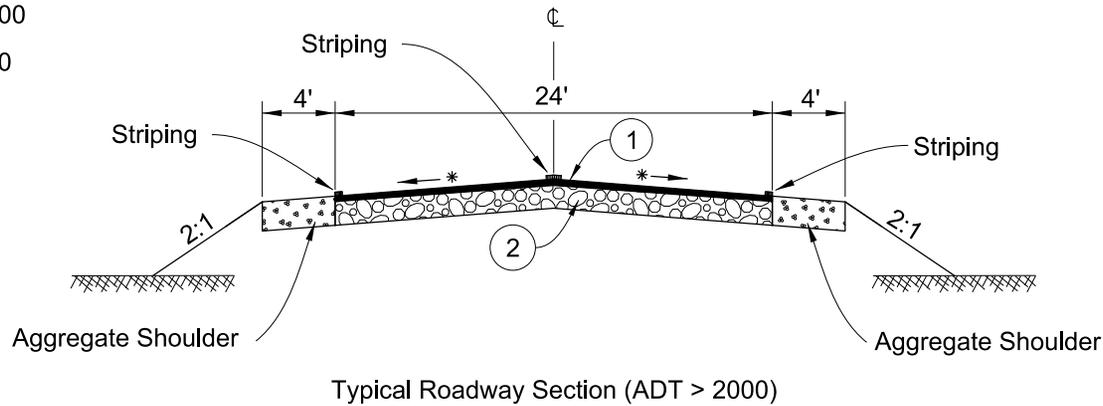

Notes:

1.) Details shown indicate the recommended diversion surfacing requirements. Subject to the approval of the project engineer, the contractor may use other surfacing and base material equal to or superior than those shown in the plans. Low profile runaround or aggregate surfacing may be used as determined by P.I.H. party or D.T.O.E.

2.) Special pavement design required if:

- Trucks > 12%, or
- Construction duration > 1 year, or
- ADT > 15,000

Figure 4-11: Two-Lane Diversion Typical