


GENERAL NOTES:


1. THIS STRUCTURE MEETS ALL DOTD HYDRAULIC PERFORMANCE CRITERIA WHEN USED IN ACCORDANCE WITH THE DOTD HYDRAULICS MANUAL AND ALL DOTD HYDRAULIC DESIGN POLICIES.
2. CONSTRUCTION SPECIFICATIONS: LATEST APPROVED LA DOTD STANDARD SPECIFICATIONS.
3. ALL EXPOSED CORNERS SHALL HAVE $\frac{3}{4}$ " CHAMFER UNLESS OTHERWISE NOTED.
4. DIMENSIONS RELATING TO REINFORCING STEEL FABRICATION ARE OUT-TO-OUT OF BARS AND DIMENSIONS RELATING TO REINFORCING STEEL SPACING ARE CENTER-TO-CENTER OF BARS.
5. REINFORCING STEEL SHALL HAVE 2" COVER UNLESS OTHERWISE SPECIFIED.
6. IF PRECAST CATCH BASIN IS USED, PLEASE REFER TO STANDARD PLAN PC-01 FOR DETAILS AND SPECIFICATIONS.
7. PAVED GUTTER DRAINS SHALL BE POURED MONOLITHICALLY.

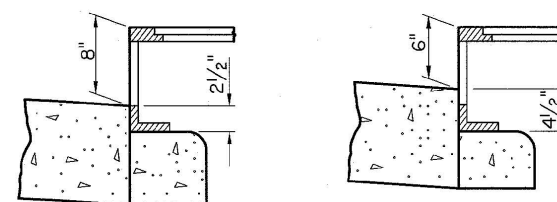


INLET CONFIGURATION

WHEN USED WITH
6" BARRIER CURB

WHEN USED WITH
4" MOUNTABLE CURB

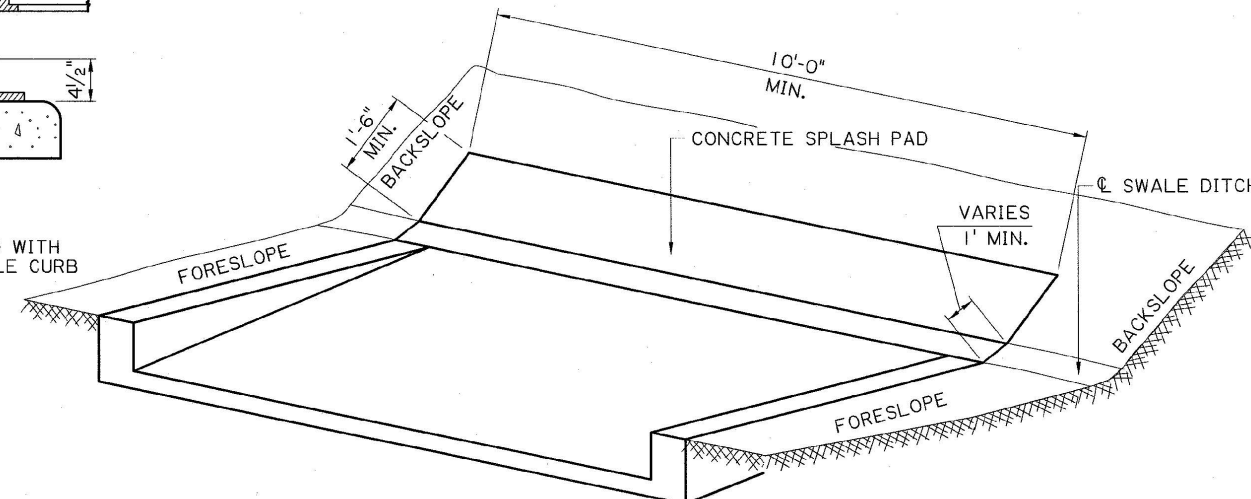


PARTIAL VIEW SHOWING PAVED GUTTER DRAIN WITHOUT DROP INLET

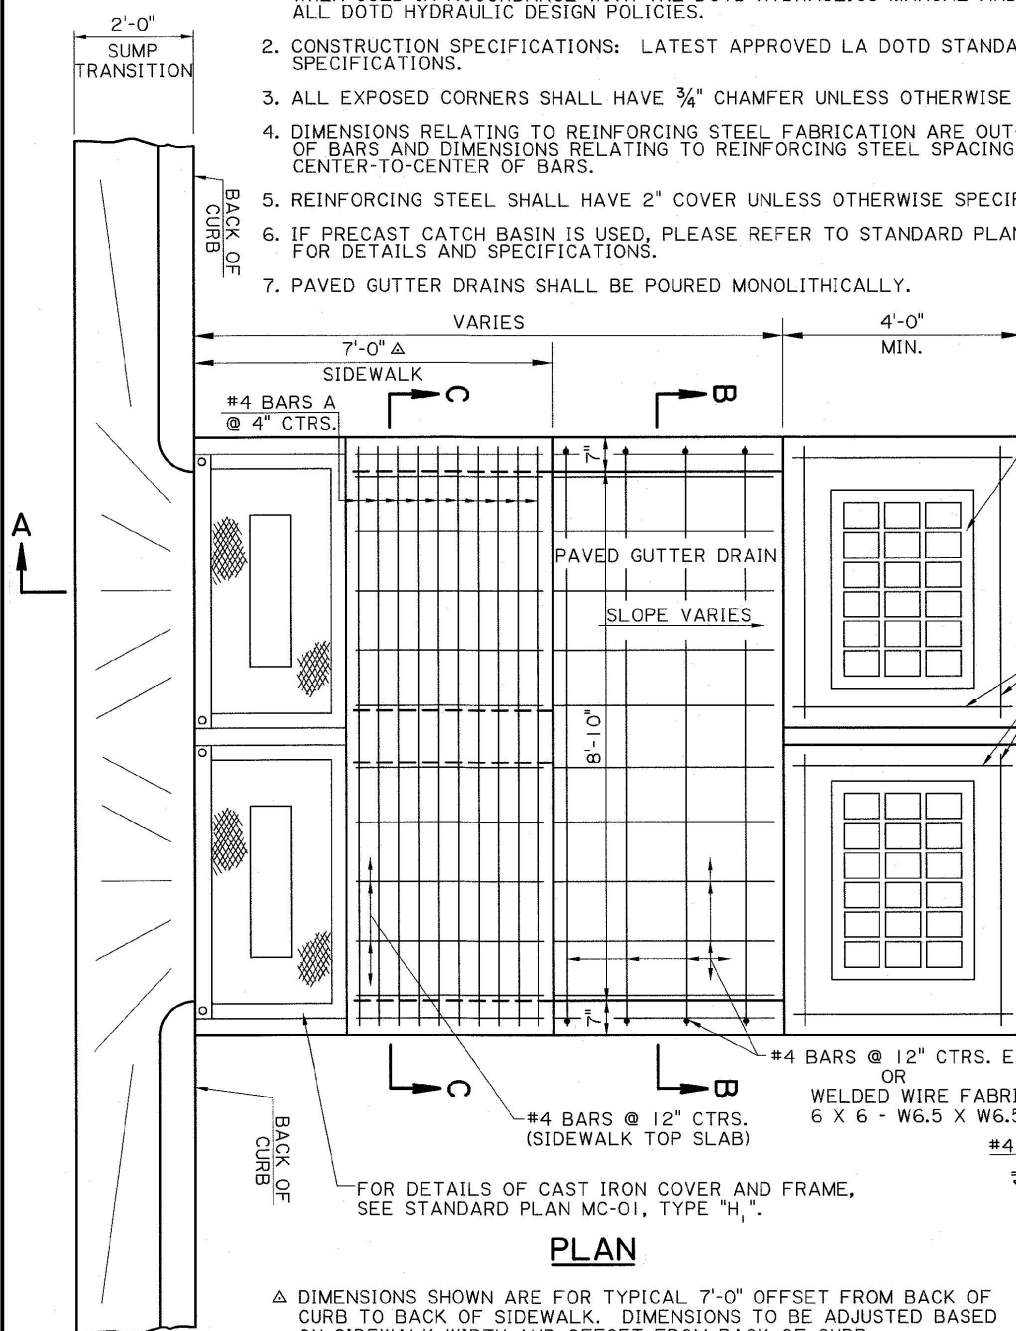


PLAN


Δ DIMENSIONS SHOWN ARE FOR TYPICAL 7'-0" OFFSET FROM BACK OF CURB TO BACK OF SIDEWALK. DIMENSIONS TO BE ADJUSTED BASED ON SIDEWALK WIDTH AND OFFSET FROM BACK OF CURB.

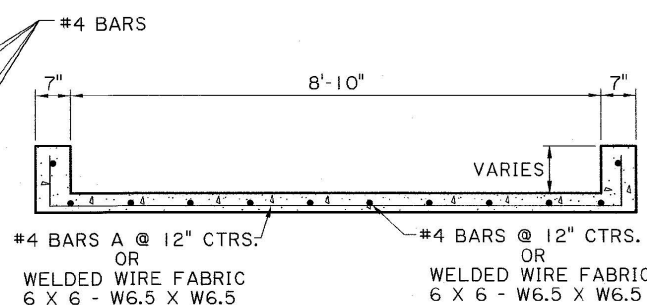


SECTION B-B

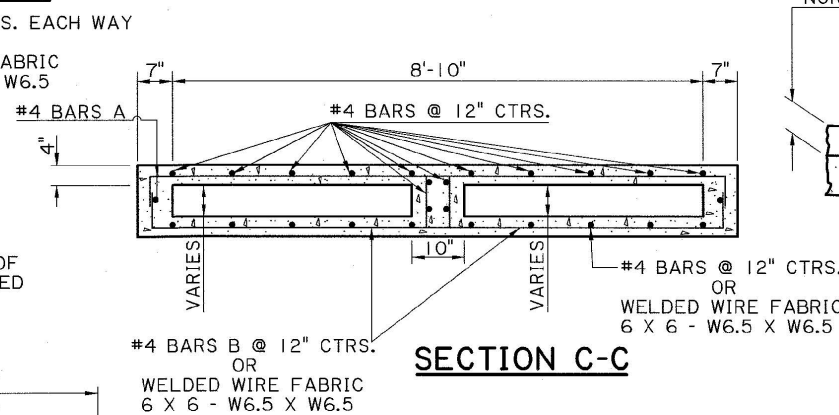


SECTION C-C

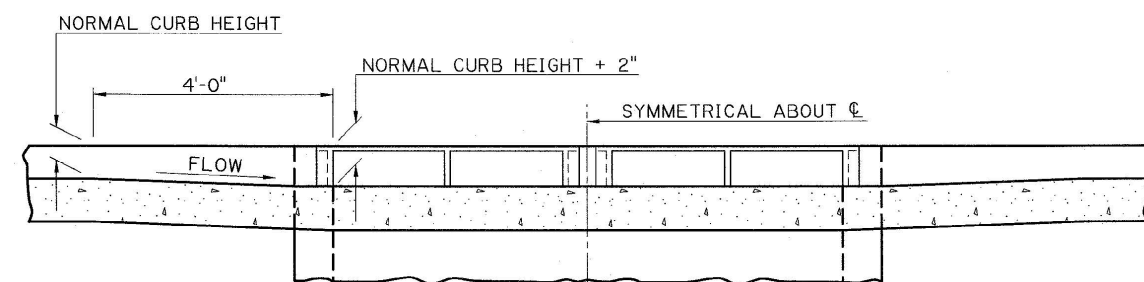


TRANSITION IN CURB HEIGHT GUTTER DRAIN AT LOW POINT

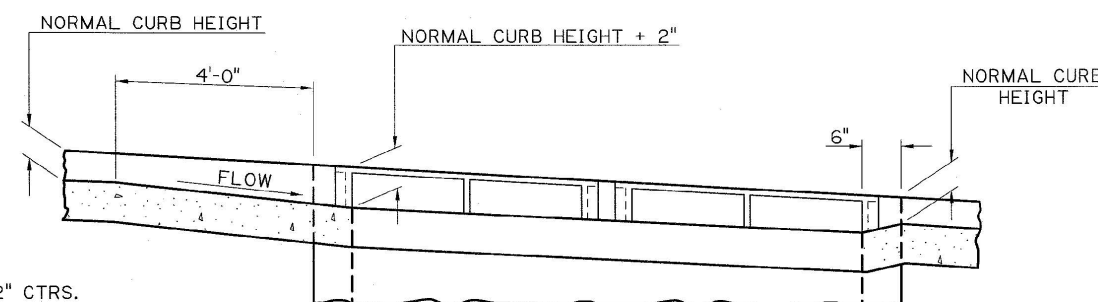

TRANSITION IN CURB HEIGHT GUTTER DRAIN ON A GRADE

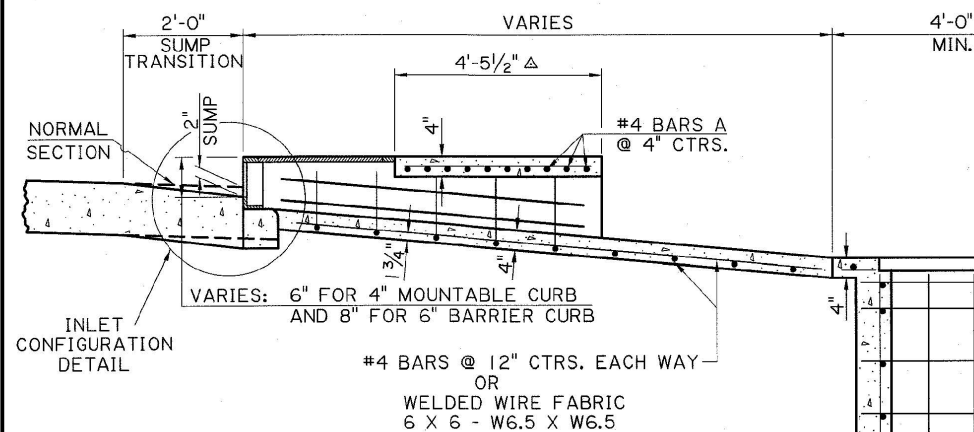

SECTION A-A

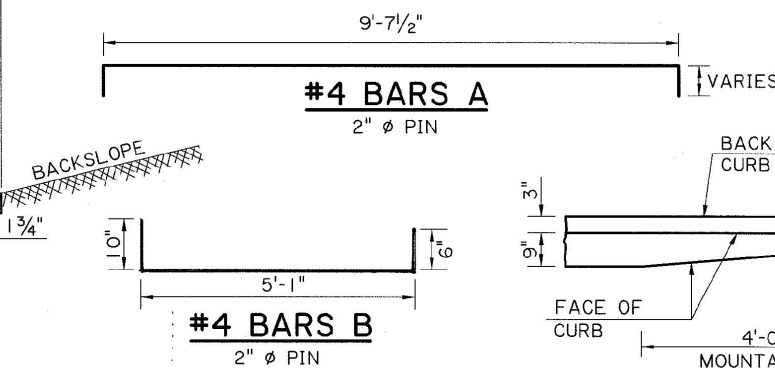

TRANSITION IN CURB WIDTH (TYPICAL)

SHEET NUMBER		DATE	
DESIGN	CHECK	DETAIL	CHECK
REVIEW	REVIEW	REVIEW	REVIEW
APPROVED BY CHIEF ENGINEER:		DATE: 6/1/2024	
REVISION OR CHANGE ORDER DESCRIPTION		BY	
NO.		DATE	
STATE OF LOUISIANA		DOTD	
DOUBLE PAVED GUTTER DRAIN WITH SIDEWALK		PG-DRAIN WITH SIDEWALK (DOUBLE)	
STANDARD PLAN		DOTD	