CONTROL SECTION STATE PROJECT

SHOULDER UNDERDRAINS


नागा नगग PCCP BASE COURSE SEPARATOR FABRIC SUB GRADE


## SECTION A-A

## LEGEND


Edge of Shoulder

- REQ'D 4" PLASTIC UNDERDRAIN PIPE (PERFORATED)
- 2 REQ'D AGGREGATE
- 3 REQ'D PLASTIC FILTER CLOTH
- REQ'D 4" PLASTIC UNDERDRAIN PIPE (NON PERFORATED)
- REQ'D CONCRETE SLOTTED HEADWALL

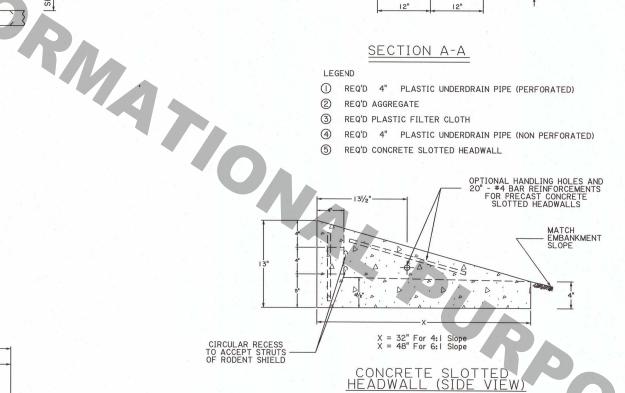




CONCRETE SLOTTED HEADWALL (FRONT VIEW)



EXPANDED METAL SHIELD WITH TWO 6 GAGE STEEL WIRE STRUTS. STRUTS SHALL BE CUT FOR SNUG FIT INTO THE RECESSES IN THE CONCRETE SLOTTED HEADWALL. STRUTS SHALL NOT BE CAST IN TO THE CONCRETE

## (1) THE SHOULDER UNDERDRAIN SYSTEMS PAY ITEM SHALL INCLUDE ALL REQUIRED TRENCHING, PLASTIC UNDERDRAIN PIPE (PERFORATED), "Y" 'S, FITTINGS, PLUGS, PLASTIC FILTER CLOTH, AGGREGATE, AND BACKFILL.

- (2) THE SHOULDER OUTLET UNDERDRAINS PAY ITEM (SINGLE OR DOUBLE HEADWALL) SHALL INCLUDE ALL REQUIRED TRENCHING, PLASTIC UNDERDRAIN PIPE (NON PERFORATED), CONCRETE SLOTTED HEADWALLS, RODENT SHIELD, EXCAVATION, AND BACKFILLING WITH SUITABLE MATERIAL REMOVED FROM TRENCHES.
- (3) TRENCH DIMENSIONS SHALL BE AS REQUIRED TO PLACE UNDERDRAIN OR AS REQUIRED BY THE PROJECT ENGINEER.
- (4) FOR MORE INFORMATION ON PAVEMENT STRUCTURE REFER TO THE TYPICAL SECTIONS.
- (5) THE LAYOUT SHOWN ON THIS SHEET IS GENERAL. ACTUAL LAYOUTS SHALL BE AS DIRECTED BY THE PROJECT ENGINEER.
- (6) THERE SHALL BE NO EXCAVATION LEFT OPEN AT THE END OF EACH DAY.
- THE CONCRETE SLOTTED HEADWALL CAN BE EITHER PRECAST OR CAST IN PLACE. THE UPPERMOST POINT OF THE HEADWALL SHALL BE FLUSH WITH THE ROAD WAY SLOPE. THE EARTHEN SIDE SLOPES ADJACENT TO THE HEADWALL SHALL THEN BE SHAPED TO CONFORM TO THE SIDES AND TOE OF THE HEAD WALL. IF A PRECAST HEADWALL IS USED, THE UNDERDRAIN PIPE WILL BE GROUTED AND SEALED TO THE HEADWALL WITH CEMENT MORTAR.
- (8) FOR PLASTIC UNDERDRAIN PIPE SEE SECTION 1006.08 AND QPL 73.
- ALL SHOULDER UNDERDRAIN OUTLET LOCATIONS SHALL BE MARKED BY PLACING A NONREFLECTORIZED RAISED PAVEMENT MARKER ON THE SHOULDER. COST TO BE INCLUDED IN THE SHOULDER OUTLET UNDERDRAINS PAY ITEM.

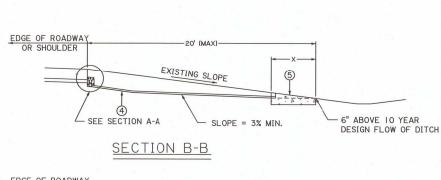

PAY LENGTH FOR SHOULDER UNDERDRAIN

FLOW 


SPACING VARIES

PLAN VIEW

FLOW

DER OUTLET UNDE (LENGTH VARIES)

EDGE OF PAVEMENT OR SHOULDER - PLUG





RODENT SHIELD DETAIL

