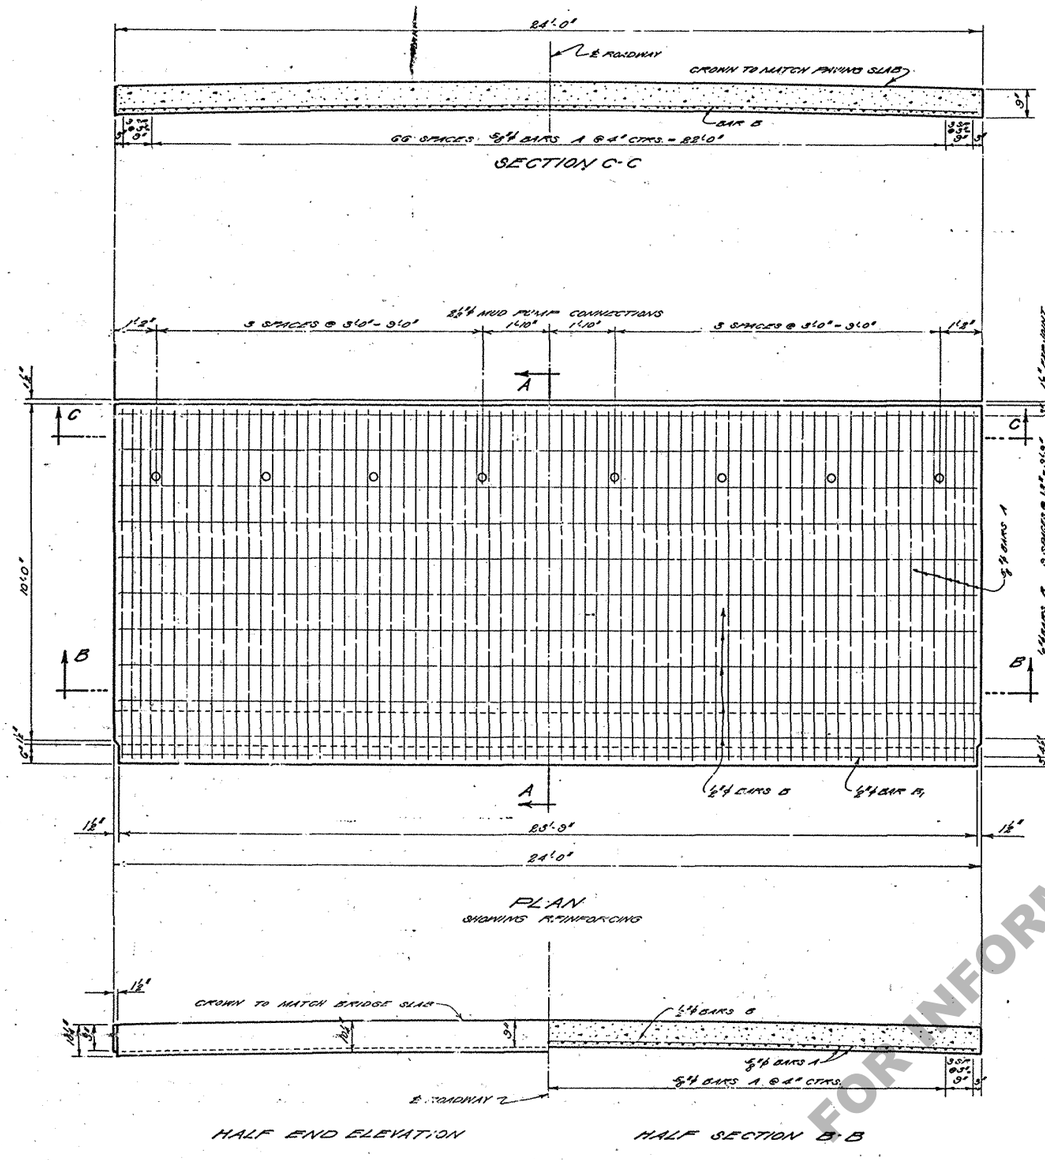

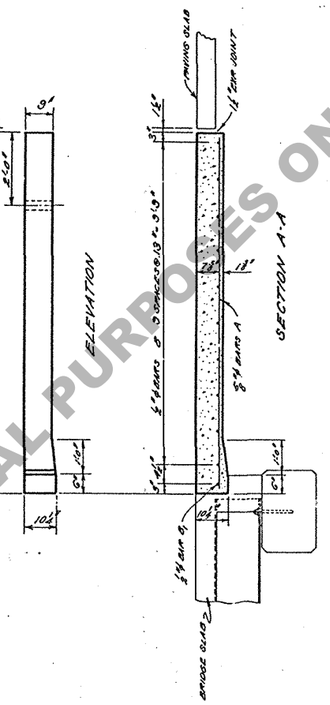

REINFORCING STEEL - ONE SLAB						
MARK	NO. REQD	SIZE	SPACING	UNIT LENGTH	TOTAL LENGTH	WEIGHT LBS.
A	73	5/8"	4" c. 3"	10'-4½"	757'-4½"	790
B	10	5/8"	13"	23'-9"	237'-6"	159
B_1	1	"	SEE A-A	23'-6"	23'-6"	16
GAS PIPE	8	2½"	PLAN	3½'	6'-4"	37 *
QUANTITIES - ONE SLAB						
CLASS "A" CONCRETE						7.16 CU. YDS.
REINFORCING STEEL						965 LBS.

* NOT INCLUDED IN TOTAL REIN. STEEL QUANTITIES.

GENERAL NOTES:
Const. Specs.-Latest Approved La. Hwy. Dept. Std. Specs.
Design Specs.-La. Hwy. Comm. 1940.
Concrete Shall Be Class "A"
All Reinforcing Steel Shall Be Deformed Bars.
No Direct Payment Will Be Made For The Furnishing Of Standard Gas Pipe; Cost Of Same Shall Be Included In Unit Bid Price For Class "A" Concrete.



MUD PUMP CONNECTIONS
8 REQUIRED EACH APPROACH SLAB

V0113

FOR INFORMATIONAL PURPOSES ONLY

STANDARD PLAN
10'-0" APPROACH SLAB
24'-0" ROADWAY

DATED: MARCH, 1941

STATE OF LOUISIANA
DEPARTMENT OF HIGHWAYS

DATE	DESCRIPTION	BY
Jan. 25,	Gen. Notes	

REVISIONS

DESIGNED | DETAILED | CHECKED | CHECKED | IN CHARGE OF

C-11-44