



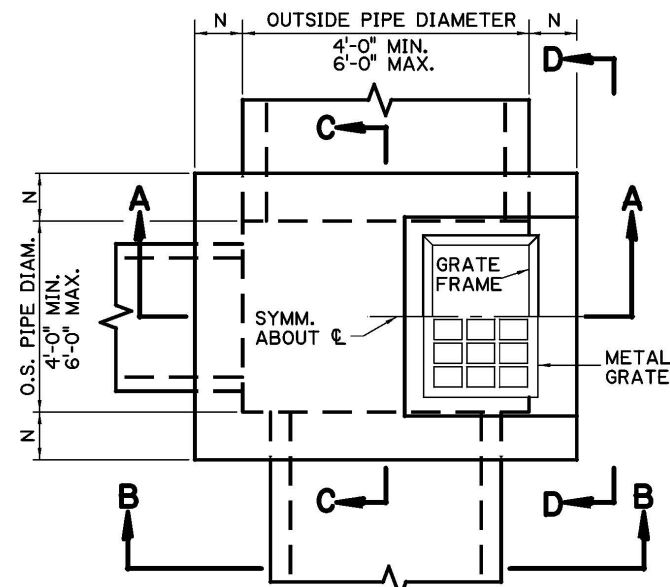


PLAN

GRATE TO BE TYPE "B" OR "C".
TYPE "B" SHOWN.

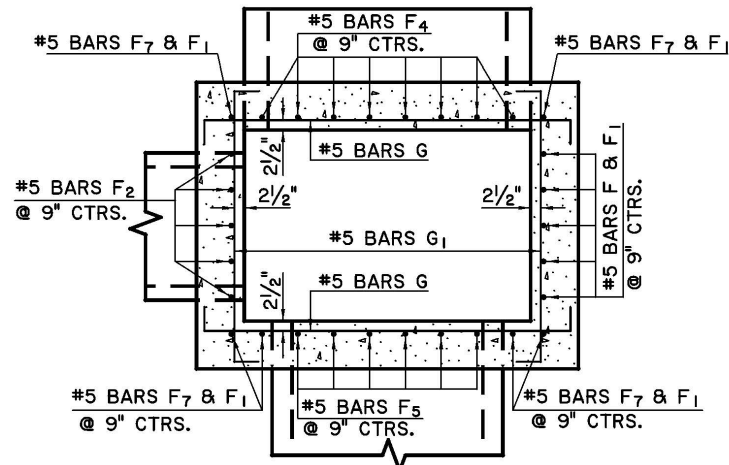


SECTION E-E

BOTTOM SLAB REINFORCING NOT SHOWN

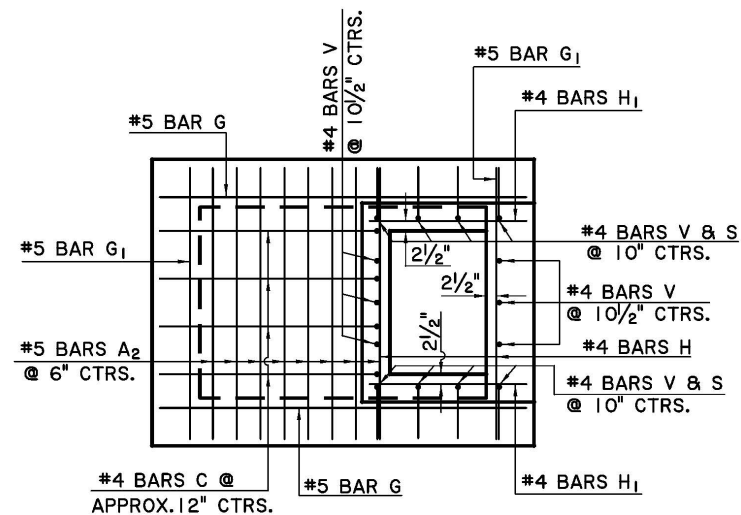


PLAN

SHOWING REINFORCING IN TOP SLAB
(FRAME AND GRATE NOT SHOWN)




#4 BARS S


DIMENSIONS	
H	N
12'-9" TO 16'-0"	10"
16'-1" TO 24'-0"	12"

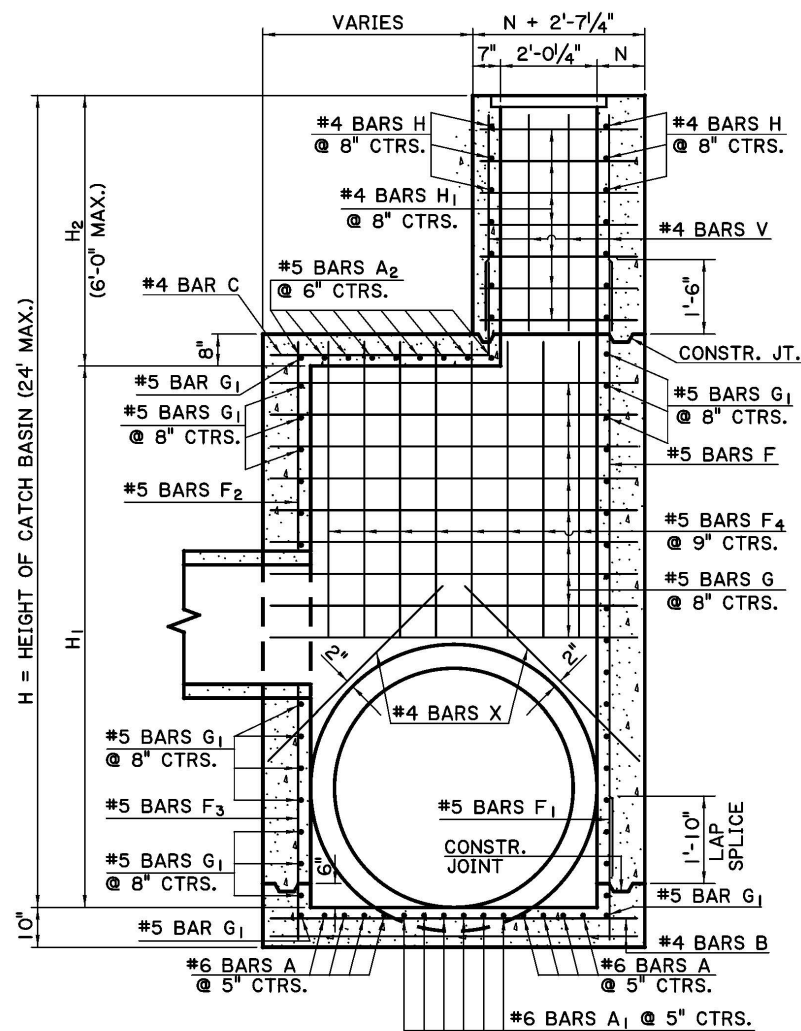


SECTION A-A

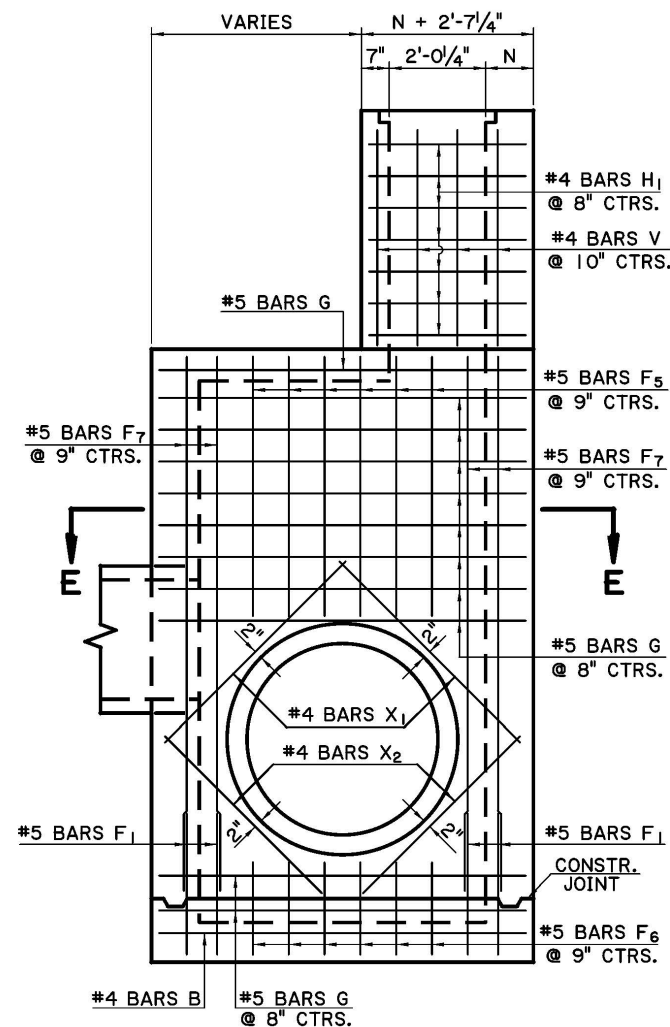


ELEVATION B-B

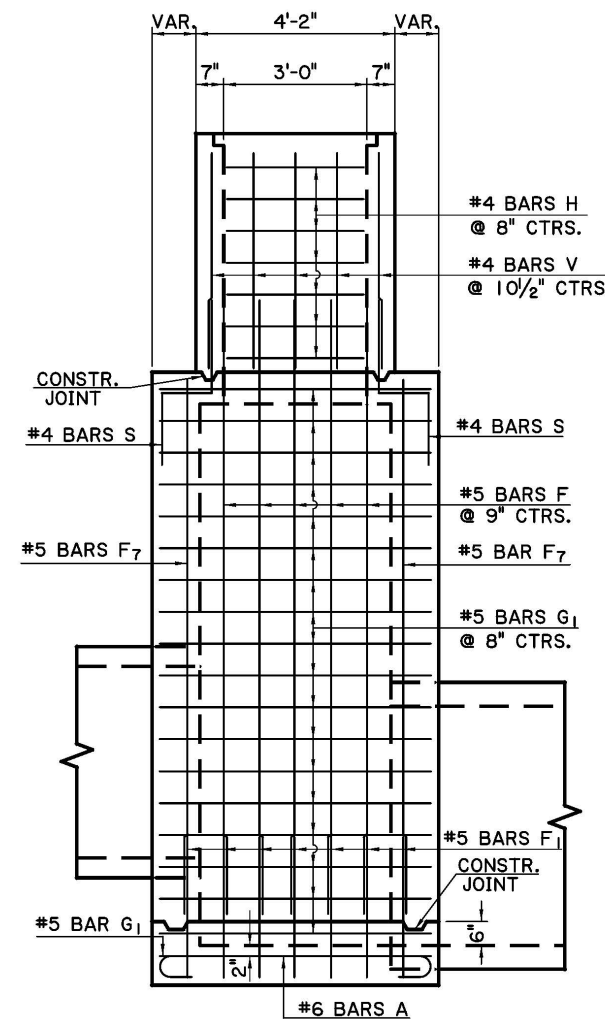


ELEVATION D-D

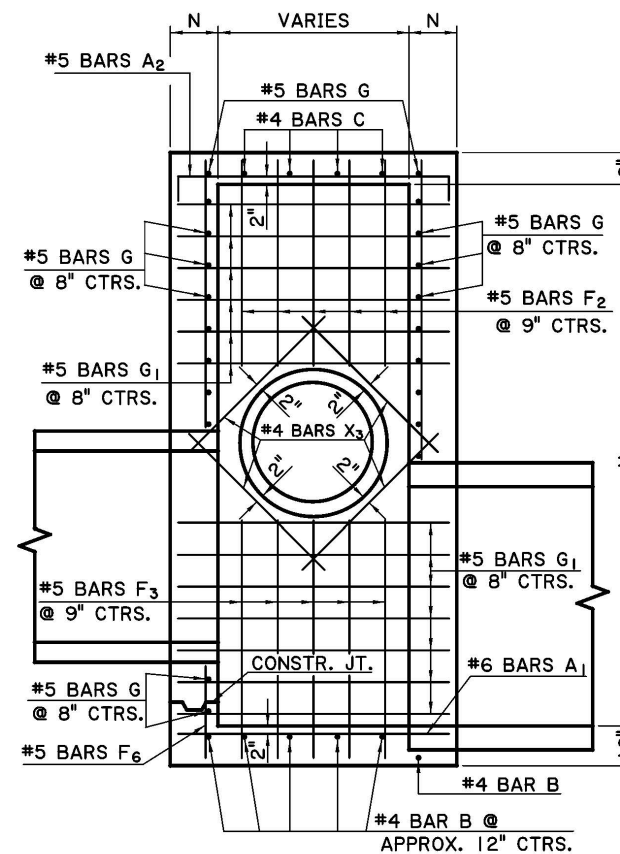


ELEVATION C-C

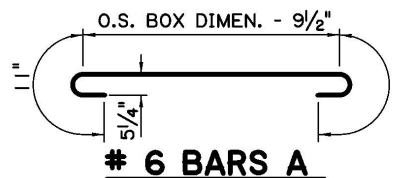


6 BARS A




6 BARS A1

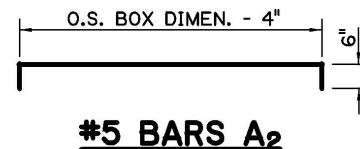

#5 BARS A2

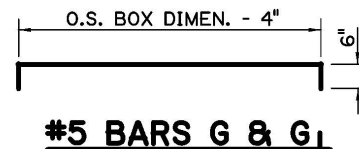

#5 BARS G & G1

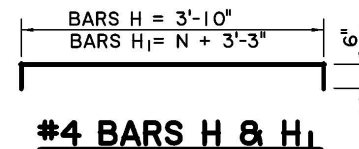

#4 BARS H & H1



#4 BARS C

GENERAL NOTES:

- 1) PROJECT SPECIFICATIONS FOR MANHOLES SHALL APPLY.
- 2) PROJECT SPECIFICATIONS FOR REINFORCEMENT SHALL APPLY FOR FURNISHING AND PLACING REINFORCING STEEL.
- 3) DIMENSIONS RELATING TO REINFORCING STEEL ARE TO BAR CENTERS.
- 4) FOR DETAILS OF GRATE AND FRAME, SEE STANDARD PLAN MC-01 (TYPE "B" OR "C"). TYPE "B" GRATE TO BE USED WHERE NO PEDESTRIAN TRAFFIC IS EXPECTED. TYPE "C" GRATE TO BE USED WHERE PEDESTRIAN TRAFFIC IS EXPECTED.

SHEET NUMBER		PARISH		CONTROL SECTION		STATE PROJECT	
DESIGN	CHECK	DETAIL	CHECK	REVIEW	SERIES	1 OF 1	
APPROVED BY CHIEF ENGINEER:				DATE: 6/1/2026			
REVISION OR CHANGE ORDER DESCRIPTION							
CONCRETE OPEN TOP CATCH BASIN MAX. PIPES: 60" X 60" MAX. DEPTH: 24"							
R-CB-38							
STANDARD PLAN							